



Data sheet | Item number: 706-753/300-100

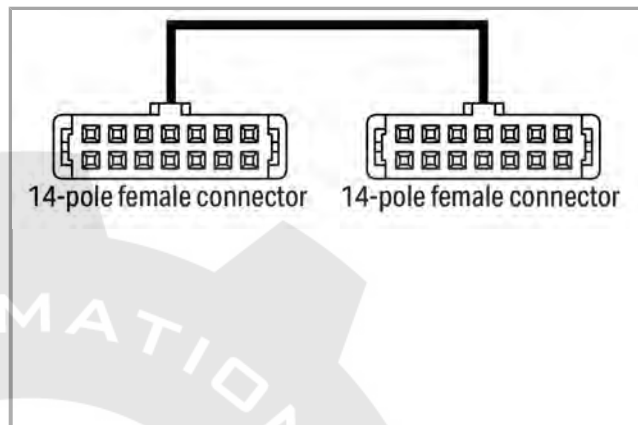

Connection cable; 14-pole; Pluggable connector per DIN 41651; 14-pole; Pluggable connector per DIN 41651; Length: 1 m (1 MOhm); Conductor cross-section: 0.14 mm²

706-753/300-100

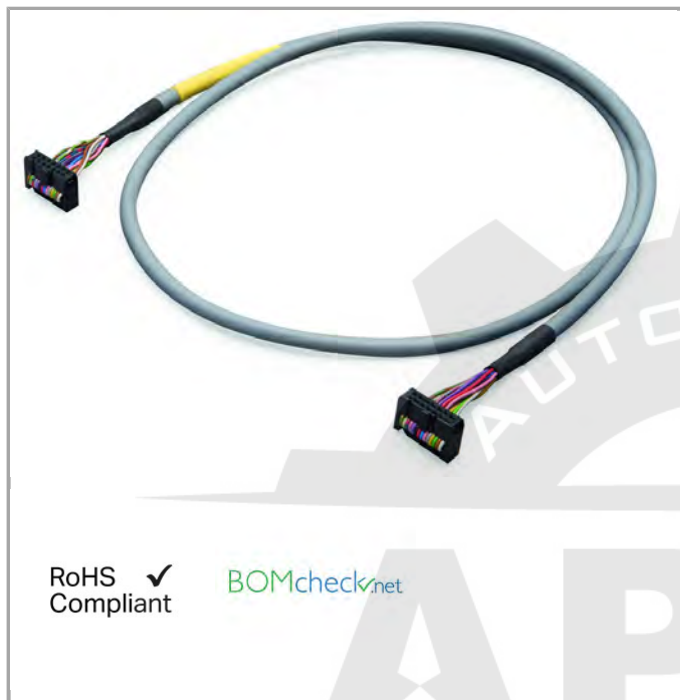

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Item description

Short description:

WAGO's 14-Pole Interface Cables transmit signals one-to-one from the 14-pole pluggable connector and are available in 1-, 2- and 3-meter lengths.

Suitable for system wiring when paired with WAGO's Interface Adapter (857-981 and 857-982).

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Operating voltage	≤ DC 35 V
Max. current per conductor	1 A

Safety and protection:

Protection class	IP20
------------------	------

Connection data

No. of poles	14
Connection type (1)	System
No. of poles 1	14
Pluggable connector	Pluggable connector per DIN 41651; female connector
Connection type (2)	System
No. of poles 2	14
Pluggable connector 2	Pluggable connector per DIN 41651; female connector
Type of cable	LiYY
Cross section of single conductor	0.14 mm ²
Color coding	per DIN VDE 47100

Geometrical Data

Cable length	1 m
--------------	-----

Material Data

Weight	59 g
--------	------

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
---	---------------

Commercial data

Product Group	30 ()
Country of origin	FR
GTIN	4050821038870
Customs Tariff No.	85444290900

Compatible products

transfer module



Item no.: 857-981
Interface adapter; 14-pole; High-side switching input

857-981



Item no.: 857-982
Interface adapter; 14-pole; High-side switching output

857-982

Downloads

Documentation

Bid Text



706-753/300-100
WAGO-Interface-Kabel

Oct 2, 2014

doc
26.1 kB

[Download](#)

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)



Subject to changes.
