


## Data sheet | Item number: 740-106

PCB terminal block; 2.5 mm<sup>2</sup>; Pin spacing 5 mm; 6-pole; CAGE CLAMP®




740-106

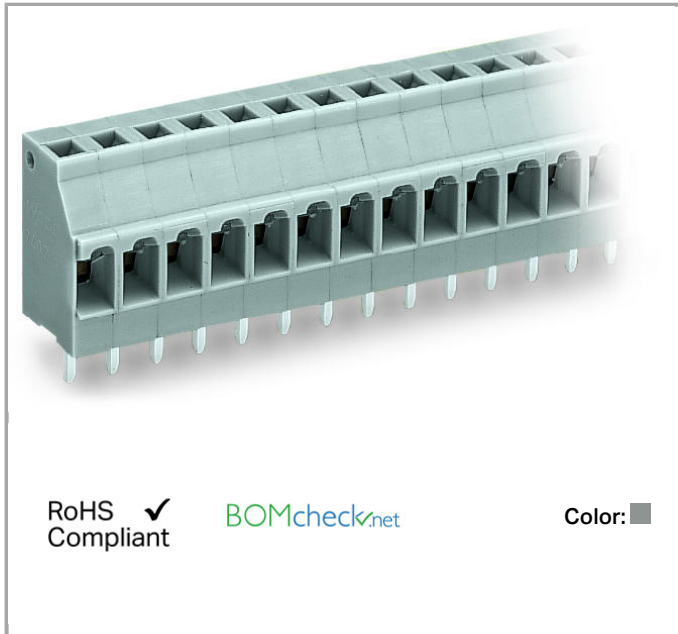

RoHS  
Compliant

BOMcheck.net

Color: ■

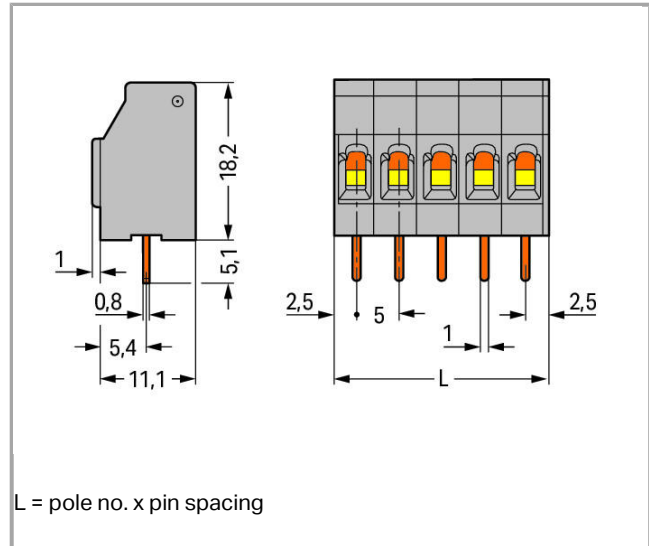

### Item description

- PCB terminal strips with CAGE CLAMP® connection and top-of-unit screwdriver actuation
- Pin and dimensions compatible with screw-type terminal blocks of similar design
- PCB terminal strips may be positioned adjacently without losing any poles

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 300 V |
| Rated impulse voltage (III / 3) | 4 kV  |
| Rated voltage (III / 2)         | 320 V |
| Rated impulse voltage (III / 2) | 4 kV  |
| Rated voltage (II / 2)          | 630 V |
| Rated impulse voltage (II / 2)  | 4 kV  |
| Rated current                   | 16 A  |

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
|--------------------------------|-------|



|                                |       |
|--------------------------------|-------|
| Rated current UL (Use Group B) | 10 A  |
| Rated voltage UL (Use Group D) | 300 V |

### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 16 A  |
| Rated voltage CSA (Use Group D) | 300 V |
| Rated current CSA (Use Group D) | 10 A  |

### Connection data

|                                                             |                          |
|-------------------------------------------------------------|--------------------------|
| Connection technology                                       | CAGE CLAMP®              |
| Actuation type                                              | Operating tool           |
| Solid conductor                                             | 0.08 2.5 mm² / 28 12 AWG |
| Fine-stranded conductor                                     | 0.08 2.5 mm² / 28 12 AWG |
| Fine-stranded conductor with ferrule with plastic collar    | 0.25 1.5 mm²             |
| Fine-stranded conductor with ferrule without plastic collar | 0.25 1.5 mm²             |
| Strip length                                                | 6 7 mm / 0.24 0.28 inch  |
| Conductor entry angle to the PCB                            | 0°                       |
| Note (conductor cross-section)                              | 12 AWG: THHN, THWN       |
| No. of poles                                                | 6                        |
| Total number of connection points                           | 6                        |
| Total number of potentials                                  | 6                        |
| Number of connection types                                  | 1                        |
| Number of levels                                            | 1                        |
| Leiterquerschnitte eindrätig                                | 0.08 mm²                 |

### Geometrical Data

|                                   |                                |
|-----------------------------------|--------------------------------|
| Pin spacing                       | 5 mm / 0.197 inch              |
| Width                             | 30 mm / 1.181 inch             |
| Height                            | 23.3 mm / 0.917 inch           |
| Height from the surface           | 18.2 mm / 0.717 inch           |
| Depth                             | 11.1 mm / 0.437 inch           |
| Solder pin length                 | 5.1 mm                         |
| Solder pin dimensions             | 0.8 x 1 mm                     |
| Drilled hole diameter (tolerance) | 1.3 <sup>(- ... +0.1)</sup> mm |

### PCB contact

|                        |                                         |
|------------------------|-----------------------------------------|
| PCB contact            | THT                                     |
| Solder pin arrangement | over the entire terminal strip, in line |

|                                     |   |
|-------------------------------------|---|
| Number of solder pins per potential | 1 |
|-------------------------------------|---|

## Material Data

|                             |                                        |
|-----------------------------|----------------------------------------|
| Color                       | gray                                   |
| Material group              | I                                      |
| Insulating material         | Polyamide 66 (PA 66)                   |
| Flammability class per UL94 | V0                                     |
| Clamping spring material    | Chrome nickel spring steel (CrNi)      |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> ) |
| Contact plating             | tin-plated                             |
| Fire load                   | 0.12 MJ                                |
| Weight                      | 8.263 g                                |

## Environmental Requirements

|                         |             |
|-------------------------|-------------|
| Limit temperature range | -60 +105 °C |
|-------------------------|-------------|

## Commercial data

|                    |                     |
|--------------------|---------------------|
| Product Group      | 4 (Printed Circuit) |
| Country of origin  | PL                  |
| GTIN               | 4055143237833       |
| Customs Tariff No. | 85369010000         |

## Approvals / Certificates

### Country specific Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | IEC 60947-7-4            | NTR NL-7298      |
|  | CCA<br>DEKRA Certification B.V. | IEC 60947-7-4            | 2169331.10       |
|  | CSA<br>DEKRA Certification B.V. | C22.2 No. 158            | 1711139          |

### Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
|------|----------|--------------------------|------------------|



**ABS**  
American Bureau of Shipping

-

14-  
HG1241537-  
PDA



**DNV GL**  
Det Norske Veritas, Germanischer Lloyd

-

TAE000016Z

## UL-Approvals

| Logo                                                                             | Approval                                    | Additional Approval Text | Certificate name  |
|----------------------------------------------------------------------------------|---------------------------------------------|--------------------------|-------------------|
|  | <b>UR</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172,<br>sec. 6 |

## Compatible products

## tools

|                                                                                    |                                                                                                                  |         |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 210-657</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short         | 210-657 |
|  | <b>Item no.: 210-658</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short | 210-658 |
|  | <b>Item no.: 210-720</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft                | 210-720 |

## Marking accessories

|                                                                                                                                                                                   |         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| <b>Item no.: 210-332/500-202</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive  | 210-332 |
| <b>Item no.: 210-332/500-204</b><br>Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive | 210-332 |
| <b>Item no.: 210-332/500-205</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive   | 210-332 |
| <b>Item no.: 210-332/500-206</b><br>Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive | 210-332 |

## ferrule

|                                                                                    |                                                                                                               |         |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated | 216-101 |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------|

|                                                                                    |                                                                                                                                                                            |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                         | 216-102 |
|    | <b>Item no.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                            | 216-103 |
|    | <b>Item no.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                          | 216-104 |
|    | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated                                                                          | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                         | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                            | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                          | 216-124 |
|    | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-131 |
|    | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-132 |
|   | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-141 |
|  | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92 | 216-142 |
|  | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-143 |
|  | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-144 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                            | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                           | 216-202 |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                              | 216-203 |
|  | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                            | 216-221 |
|                                                                                    | <b>Item no.: 216-222</b>                                                                                                                                                   |         |

|                                                                                   |                                                                                                                                                                                      |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                                                     | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|    | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|                                                                                   | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                         | 216-301 |
|   | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                         | 216-302 |
|                                                                                   | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                         | 216-321 |
|  | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                         | 216-322 |

## Downloads

## Documentation

## Additional Information

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf<br>3.6 MB | Download |
|------------------------|-------------|---------------|----------|

## CAD/CAE - Smart Data

## CAD data

|                     |     |          |
|---------------------|-----|----------|
| 3D Download 740-106 | URL | Download |
|---------------------|-----|----------|

## EPLAN

|                   |          |
|-------------------|----------|
| EPLAN Data Portal | Download |
|-------------------|----------|



Subject to changes.

---