


**Data sheet | Item number: 745-881/006-000**

Stackable PCB terminal block; 16 mm<sup>2</sup>; Pin spacing 20 mm; 1-pole; CAGE  
CLAMP®; commoning option



745-881/006-000


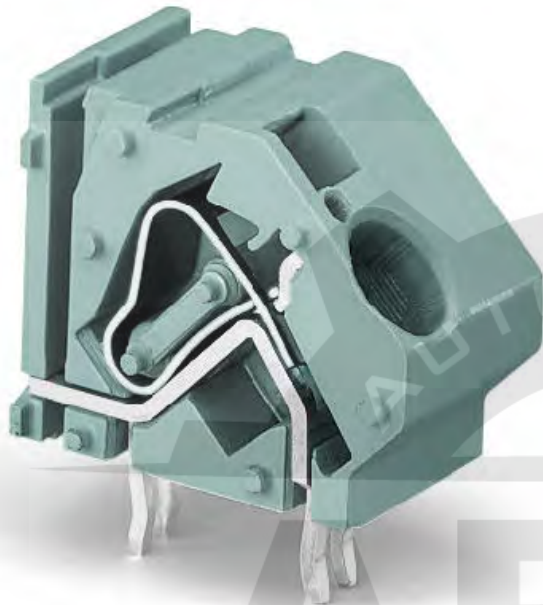


RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

**Current-Carrying Capacity Curve**  
Pin spacing: 10 mm / Conductor cross-section: 16 mm<sup>2</sup> "f-st"  
Based on: EN 60512-5-2 / Reduction factor: 1

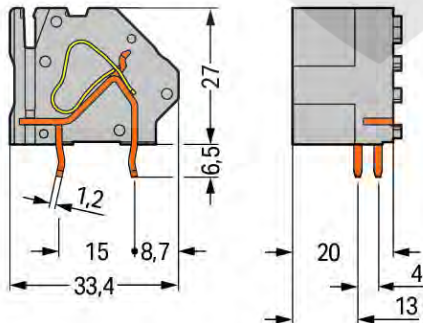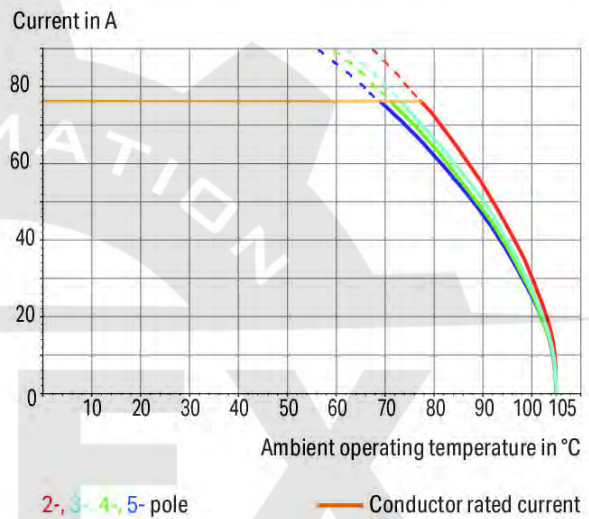

Item description

- Modular PCB terminal blocks with screwdriver-actuated CAGE CLAMP® for custom PCB terminal strip assemblies
- Versions with Ex approval
- Unrestricted UL approval up to 600 V with 20 mm pin spacing
- Common and distribute potentials via comb-style jumper bars
- Four solder pins for high mechanical stability
- Integrated testing tap
- Marker slot for Mini-WSB markers

## Data

### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |        |
|---------------------------------|--------|
| Rated voltage (III / 3)         | 1000 V |
| Rated impulse voltage (III / 3) | 12 kV  |
| Rated voltage (III / 2)         | 1000 V |
| Rated impulse voltage (III / 2) | 12 kV  |
| Rated voltage (II / 2)          | 1000 V |
| Rated impulse voltage (II / 2)  | 12 kV  |
| Rated current                   | 76 A   |

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 600 V |
| Rated current UL (Use Group B) | 65 A  |
| Rated voltage UL (Use Group C) | 600 V |
| Rated current UL (Use Group C) | 65 A  |

#### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 600 V |
| Rated current CSA (Use Group B) | 65 A  |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 65 A  |

### Connection data

|                                                             |                                           |
|-------------------------------------------------------------|-------------------------------------------|
| Connection technology                                       | CAGE CLAMP®                               |
| Actuation type                                              | Operating tool                            |
| Solid conductor                                             | 0.2 ... 16 mm <sup>2</sup> / 24 ... 6 AWG |
| Fine-stranded conductor                                     | 0.2 ... 16 mm <sup>2</sup> / 24 ... 6 AWG |
| Fine-stranded conductor with ferrule with plastic collar    | 0.25 ... 10 mm <sup>2</sup>               |
| Fine-stranded conductor with ferrule without plastic collar | 0.25 ... 10 mm <sup>2</sup>               |

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Strip length                      | 12 ... 13 mm / 0.47 ... 0.51 inch |
| Conductor entry angle to the PCB  | 45°                               |
| No. of poles                      | 1                                 |
| Total number of connection points | 1                                 |
| Total number of potentials        | 1                                 |
| Number of connection types        | 1                                 |
| Number of levels                  | 1                                 |
| Number of jumper slots            | 1                                 |

### Geometrical Data

|                                   |                                |
|-----------------------------------|--------------------------------|
| Pin spacing                       | 20 mm / 0.787 inch             |
| Width                             | 21.5 mm / 0.846 inch           |
| Height                            | 33.5 mm / 1.319 inch           |
| Height from the surface           | 27 mm / 1.063 inch             |
| Depth                             | 33.4 mm / 1.315 inch           |
| Solder pin length                 | 6.5 mm                         |
| Solder pin dimensions             | 1.2 x 1.6 mm                   |
| Drilled hole diameter (tolerance) | 2.2 <sup>(- ... +0.1)</sup> mm |

### PCB contact

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| PCB contact                         | THT                                     |
| Solder pin arrangement              | over the entire terminal strip, in line |
| Number of solder pins per potential | 4                                       |

### Material Data

|                             |                                        |
|-----------------------------|----------------------------------------|
| Color                       | gray                                   |
| Material group              | I                                      |
| Insulating material         | Polyamide 66 (PA 66)                   |
| Flammability class per UL94 | V0                                     |
| Clamping spring material    | Chrome nickel spring steel (CrNi)      |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> ) |
| Contact plating             | tin-plated                             |
| Fire load                   | 0.235 MJ                               |
| Weight                      | 12.583 g                               |

### Environmental Requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|

## Commercial data

|                    |                     |
|--------------------|---------------------|
| Product Group      | 4 (Printed Circuit) |
| Country of origin  | PL                  |
| GTIN               | 4044918303217       |
| Customs Tariff No. | 85369010000         |

## Approvals / Certificates

### Country specific Approvals

| Logo                                                                              | Approval                        | Additional Approval Text | Certificate name |
|-----------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|   | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2160584.14       |
|   | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7094      |
|  | CSA<br>DEKRA Certification B.V. | C22.2 No. 158            | 1604421          |

### UL-Approvals

| Logo                                                                               | Approval                             | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|--------------------------------------|--------------------------|------------------|
|  | UR<br>Underwriters Laboratories Inc. | UL 1059                  | E45172 sec6      |

## Compatible products

### Jumper

|                                                                                    |                                                         |         |
|------------------------------------------------------------------------------------|---------------------------------------------------------|---------|
|  | Item no.: 745-681<br>Comb-style jumper bar; from 1 to 3 | 745-681 |
|  | Item no.: 745-682<br>Comb-style jumper bar; 2-way       | 745-682 |
|                                                                                    | Item no.: 745-683                                       |         |



Comb-style jumper bar; 3-way

745-683

**Item no.: 745-684**

Comb-style jumper bar; 4-way

745-684

**Item no.: 745-685**

Comb-style jumper bar; 5-way

745-685

**check****Item no.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable

210-136

**Item no.: 210-137**

Test plug; 2.3 mm Ø; with 500 mm cable

210-137

**End plate****Item no.: 745-500**

End plate

745-500

**Item no.: 745-540**

End plate

745-540

**Item no.: 745-545**

End plate

745-545

**ferrule****Item no.: 216-101**

Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated

216-101

**Item no.: 216-102**

Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated

216-102

**Item no.: 216-103**

Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated

216-103

**Item no.: 216-104**

Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated

216-104

**Item no.: 216-106**

Ferrule; Sleeve for 2.5 mm² / AWG 14; uninsulated; electro-tin plated

216-106

**Item no.: 216-107**

Ferrule; Sleeve for 4 mm² / AWG 12; uninsulated; electro-tin plated

216-107

**Item no.: 216-108**

Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated

216-108

**Item no.: 216-109**

Ferrule; Sleeve for 10 mm² / AWG 8; uninsulated; electro-tin plated

216-109

**Item no.: 216-121**

Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated

216-121

**Item no.: 216-122**

Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated

216-122

**Item no.: 216-123**

Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated

216-123

|                                                                                    |                                                                                                                                                                                        |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated                                                                          | 216-124 |
|    | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-131 |
|    | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-132 |
|    | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-141 |
|    | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92 | 216-142 |
|    | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-143 |
|    | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-144 |
|    | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-151 |
|    | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                            | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                           | 216-202 |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                              | 216-203 |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                                                            | 216-204 |
|  | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                                                           | 216-205 |
|  | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                                                            | 216-206 |
|  | <b>Item no.: 216-207</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated                                                                              | 216-207 |
|  | <b>Item no.: 216-208</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90      | 216-208 |
|  | <b>Item no.: 216-209</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; insulated; electro-tin plated                                                                              | 216-209 |
|  | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                            | 216-221 |

|                                                                                   |                                                                                                                                                                          |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                         | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated                                                                          | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|    | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-244 |
|    | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-246 |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|   | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264 |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-266 |
|  | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-267 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-284 |
|  | <b>Item no.: 216-286</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-286 |
|  | <b>Item no.: 216-287</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-287 |
|  | <b>Item no.: 216-288</b><br>Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-288 |
|                                                                                   | <b>Item no.: 216-289</b><br>Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped;                                    | 216-289 |





acc. to DIN 46228, Part 4/09.90

|                                                                                  |         |
|----------------------------------------------------------------------------------|---------|
| <b>Item no.: 216-301</b>                                                         | 216-301 |
| Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated |         |



|                                                                                  |         |
|----------------------------------------------------------------------------------|---------|
| <b>Item no.: 216-302</b>                                                         | 216-302 |
| Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated |         |

|                                                                                  |         |
|----------------------------------------------------------------------------------|---------|
| <b>Item no.: 216-321</b>                                                         | 216-321 |
| Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated |         |



|                                                                                  |         |
|----------------------------------------------------------------------------------|---------|
| <b>Item no.: 216-322</b>                                                         | 216-322 |
| Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated |         |

**Marking accessories**

|                                                                                     |          |
|-------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115</b>                                                           | 2009-115 |
| WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type |          |



|                                                                                              |          |
|----------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-002</b>                                                            | 2009-115 |
| WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-002 |          |



|                                                                                             |          |
|---------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-006</b>                                                           | 2009-115 |
| WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-006 |          |



|                                                                                              |          |
|----------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-007</b>                                                            | 2009-115 |
| WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-007 |          |



|                                                                                             |          |
|---------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-012</b>                                                           | 2009-115 |
| WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-012 |          |



|                                                                                              |          |
|----------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-017</b>                                                            | 2009-115 |
| WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-017 |          |



|                                                                                              |          |
|----------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-023</b>                                                            | 2009-115 |
| WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-023 |          |



|                                                                                             |          |
|---------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-115/000-024</b>                                                           | 2009-115 |
| WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-024 |          |



|                                                                                          |          |
|------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-145</b>                                                                | 2009-145 |
| Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type |          |



|                                                                                                   |          |
|---------------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-145/000-002</b>                                                                 | 2009-145 |
| Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-002 |          |



|                                                                                                   |          |
|---------------------------------------------------------------------------------------------------|----------|
| <b>Item no.: 2009-145/000-005</b>                                                                 | 2009-145 |
| Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type /000-005 |          |





|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 7000-006 | 2009-145 |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 7000-007 | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 7000-012 | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | 7000-023 | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 7000-024 | 2009-145 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|    | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-002 | 248-501  |
|   | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-017 | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-023 | 248-501  |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 7000-024 | 248-501  |
|  | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                   |          | 793-501  |

**Item no.: 793-501/000-002**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-002

793-501

**Item no.: 793-501/000-005**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-005

793-501

**Item no.: 793-501/000-006**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-006

793-501

**Item no.: 793-501/000-007**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-007

793-501

**Item no.: 793-501/000-012**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-012

793-501

**Item no.: 793-501/000-017**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-017

793-501

**Item no.: 793-501/000-023**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-023

793-501

**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-024

793-501

**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

793-5501

**Item no.: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

/000-002

793-5501

**Item no.: 793-5501/000-005**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-005

793-5501

**Item no.: 793-5501/000-006**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-006

793-5501

**Item no.: 793-5501/000-007**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-007

793-5501

**Item no.: 793-5501/000-012**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-012

793-5501

**Item no.: 793-5501/000-017**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-017

793-5501



Item no.: 793-5501/000-023

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-023

793-5501



Item no.: 793-5501/000-024

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-024

793-5501

## Downloads

### CAD/CAE - Smart Data

#### PCB libraries

|                                                       |             |         |          |
|-------------------------------------------------------|-------------|---------|----------|
| DesignSpark Library for WAGO PCB Terminal Blocks      | 2.1         | zip     | Download |
| Compatible with DesignSpark PCB Version 4.x or higher | Oct 6, 2014 | 22.5 MB |          |

|                                                                 |             |         |          |
|-----------------------------------------------------------------|-------------|---------|----------|
| EAGLE Library for WAGO PCB Terminal Blocks                      | 2.1         | zip     | Download |
| Compatible with EAGLE PCB Design Software Version 6.x or higher | Oct 6, 2014 | 23.9 MB |          |

|                                                         |             |         |          |
|---------------------------------------------------------|-------------|---------|----------|
| TARGET Library for WAGO PCB Terminal Blocks             | 1.1.0       | zip     | Download |
| Compatible with TARGET PCB Design Software Version 17.x | Oct 6, 2014 | 27.1 MB |          |

#### CAD data

|                             |     |          |
|-----------------------------|-----|----------|
| 3D Download 745-881/006-000 | URL | Download |
|-----------------------------|-----|----------|

Subject to changes.