



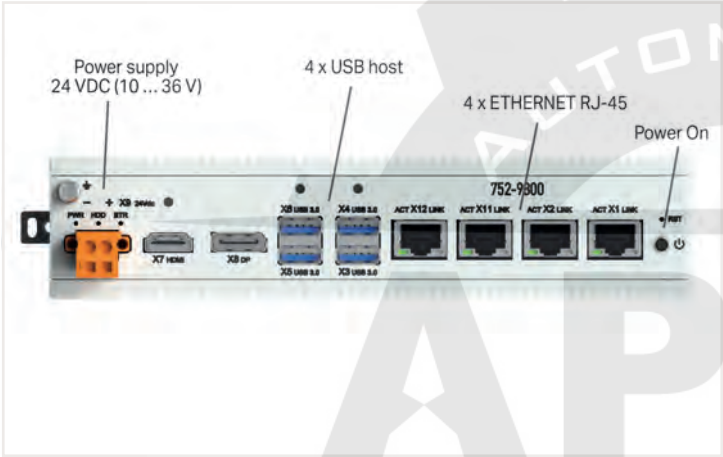

<https://www.wago.com/752-9800>

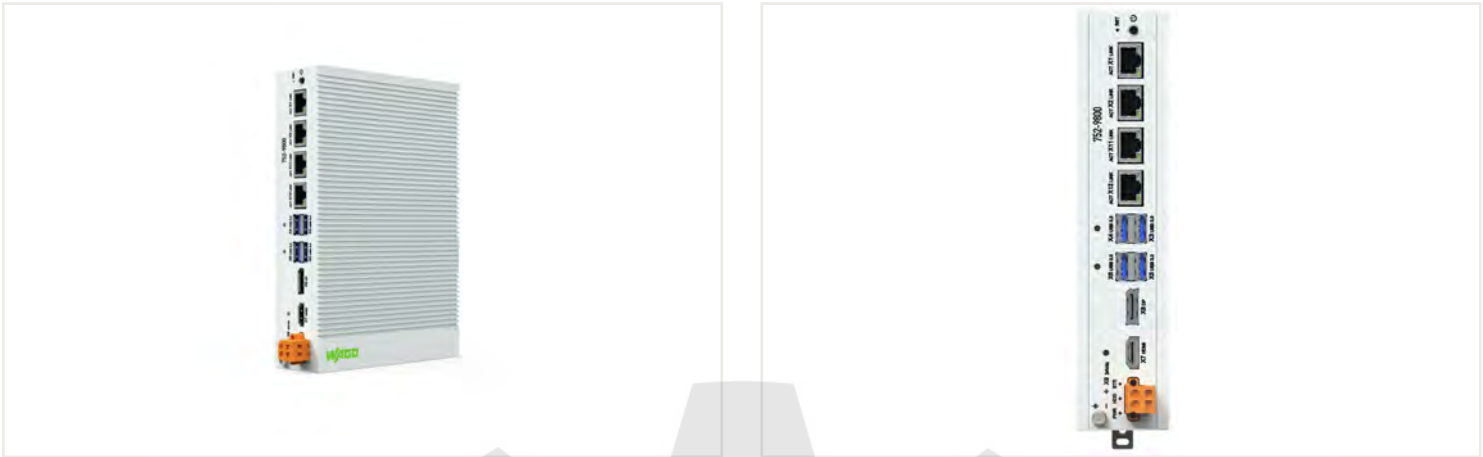

- 4 x ETHERNET interface for connecting to field devices and IT networks
- 4 x USB interface for optional connection of a USB stick, mouse or keyboard
- HDMI and display port interfaces for connecting a display

Technical data	
ETHERNET protocols	DHCP DNS HTTP HTTPS SSH SCP SFTP
Visualization	Web server
Operating system	Debian Linux 10.9
Processor	Intel® i7-7600U 2.8 GHz (max. 3.90 GHz)
Security Modul	TPM 2.0 chip
Main memory (RAM)	16 GB; DDR4 2133 MHz
Internal memory (flash)	256 GB; SATA 2.5" SSD
Indicators	3 x LED
Supply voltage	24 VDC (10 ... 36 V)
Input current (typ.) at nominal load (24 V)	2292 mA
Input current (max.) (24 V)	3967 mA
Operating power	55 W (typ.); 95.2 W (max.)



Connection data	
Connection technology: communication/fieldbus	4 x RJ-45 1000BASE-T; 4 x USB 3.0 (Typ A)

Physical data	
Width	45 mm
Height	200 mm
Depth	140 mm

Mechanical Data	
Weight	1810 g
Housing material	Aluminum, powder-coated

Environmental requirements	
Ambient temperature (operation)	-20 ... +60 °C
Surrounding air temperature (storage)	-40 ... +85 °C
Protection type	IP40
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Fire load	0 MJ

Commercial data	
ETIM 8.0	EC001413
PU (SPU)	1 pcs
Country of origin	TW
GTIN	4066966169584
Customs tariff number	84715000000

Approvals and certificates

General approvals



Approval	Standard	Certificate name
UL Underwriters Laboratories Inc.	UL 62368-1	E482462



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 752-9800	↓

Documentation	
Manual	System Description
Product Manual WAGO Edge Computer V 1.1.0 21.10.2022 pdf 1062.85 KB	Edge Computing; General Product Information pdf 219.09 KB
↓	↓

Bid Text	
752-9800	xml 5.08 KB
	↓
752-9800	docx 29.29 KB
	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 752-9800	EPLAN Data Portal 752-9800
↓	↓
	ZUKEN Portal 752-9800
	↓