

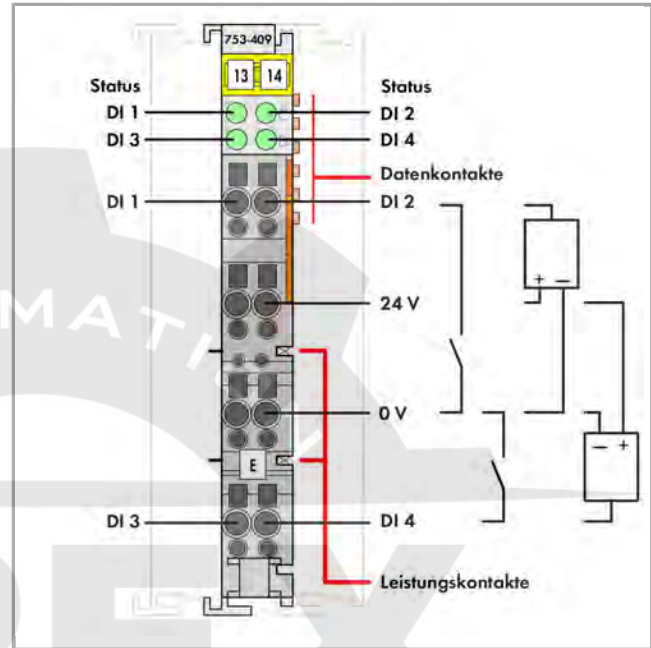


753-409

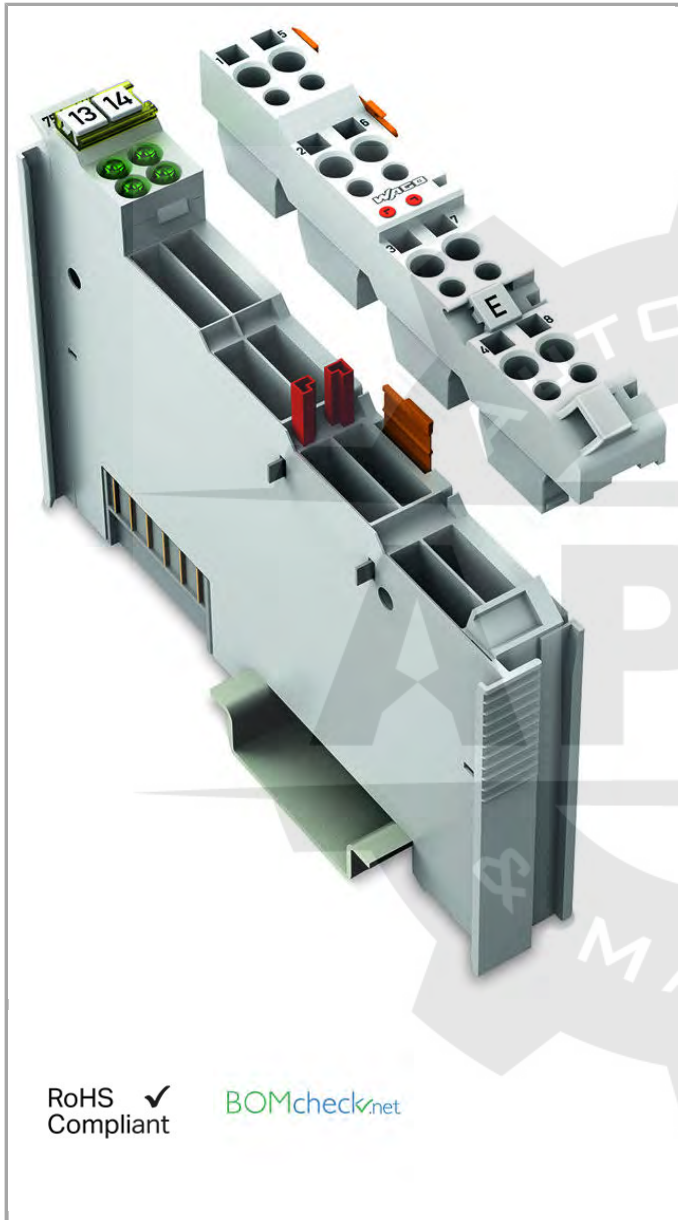

RoHS   
Compliant

[BOMcheck.net](https://www.bomcheck.net)

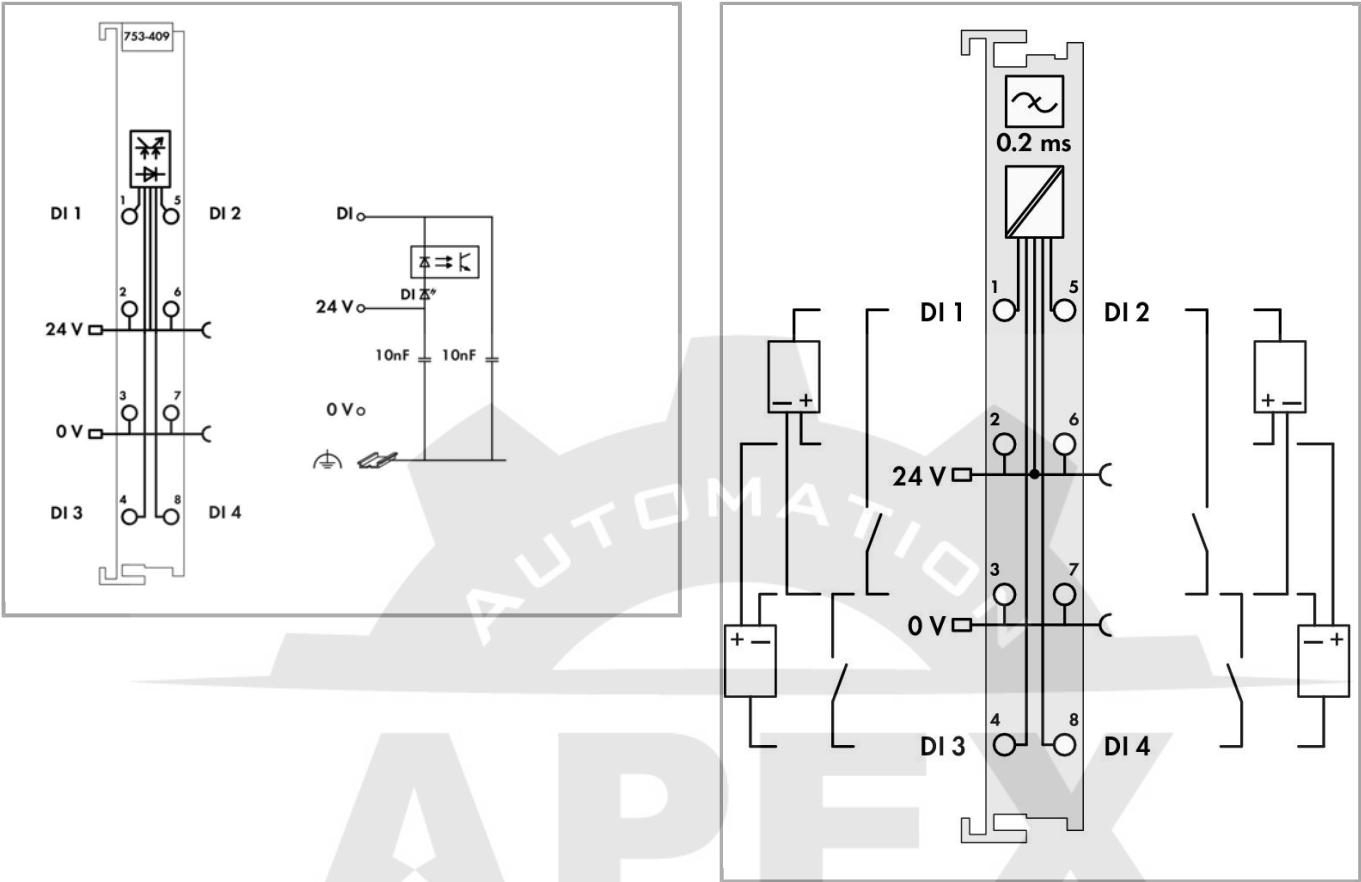

Item description

This digital input module receives control signals from digital field devices (e.g., sensors).  
Each input module has a noise-rejection filter.  
Field and system levels are electrically isolated.

Note:

WAGO's 753 Series Pluggable Connectors and Coding Fingers are not included.

Data  
Technical Data

|                                   |                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Number of digital inputs          | 4                                                                                                                                    |
| Total number of channels (module) | 4                                                                                                                                    |
| Type of signal                    | Voltage                                                                                                                              |
| Sensor supply voltage             | DC 24 V                                                                                                                              |
| Sensor connection                 | 2 x (2-conductor, 3-conductor); To connect other sensors, a suitable field side connection module (e.g., 750-614) must also be used. |

|                                                        |                                                                                                                   |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Input characteristic                                   | low-side switching                                                                                                |
| Input filter (digital)                                 | 0.2 ms                                                                                                            |
| Input current per channel for signal (0) typ.          | 7 mA                                                                                                              |
| Voltage range for signal (0)                           | DC ( $U_V - 5\text{ V}$ ) ... $U_V$                                                                               |
| Voltage range for signal (1)                           | -3 VDC ... ( $U_V - 15\text{ V}$ )                                                                                |
| Max input data width (internal)                        | 4 Bit                                                                                                             |
| System supply voltage                                  | DC 5 V; via data contacts                                                                                         |
| Current consumption, system supply (5 V)               | 5 mA                                                                                                              |
| System and sensor supply voltage                       | )                                                                                                                 |
| Field supply voltage                                   | DC 24 V (-15 ... +20 %); über Leistungskontakte (Einspeisung über Messerkontakt; Weiterleitung über Federkontakt) |
| Isolation field – system                               | 500 VAC (1 min)                                                                                                   |
| Indicators                                             | LED (A-D) green: Status DI 1 ... DI 4                                                                             |
| Number of incoming power jumper contacts               | 2                                                                                                                 |
| Number of outgoing power jumper contacts               | 2                                                                                                                 |
| Current carrying capacity of the power jumper contacts | 10 A                                                                                                              |

### Connection data

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| Connection technology: In-/Outputs | 8 x CAGE CLAMP®                              |
| Connection type (1)                | Inputs/Outputs                               |
| Solid conductor                    | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor            | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                       | 9 ... 10 mm / 0.35 ... 0.39 inch             |

### Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 12 mm / 0.472 inch   |
| Height                                | 69.8 mm / 2.748 inch |
| Height from upper-edge of DIN-35 rail | 62.6 mm / 2.465 inch |
| Depth                                 | 100 mm / 3.937 inch  |

### Mechanical data

|                     |             |
|---------------------|-------------|
| Type of mounting    | DIN-35 rail |
| Pluggable connector | yes         |

### Material Data

|                  |                              |
|------------------|------------------------------|
| Color            | light gray                   |
| Housing material | Polycarbonate, polyamide 6.6 |
| Fire load        | 1.154 MJ                     |
| Weight           | 39 g                         |

Conformity marking

1

## Environmental Requirements


|                                                                                    |                                         |
|------------------------------------------------------------------------------------|-----------------------------------------|
| Surrounding air (operating) temperature                                            | 0 ... 55 °C                             |
| Surrounding air (storage) temperature                                              | -40 ... 85 °C                           |
| Protection class                                                                   | IP20                                    |
| Degree of pollution (5)                                                            | 2 per IEC 61131-2                       |
| Operating altitude                                                                 | 0 ... 2000 m                            |
| Mounting position                                                                  | horizontal (standing/lying) or vertical |
| Relative air humidity (no condensation)                                            | 95 %                                    |
| Vibration resistance                                                               | acc. to IEC 60068-2-6                   |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                  |
| EMC immunity to interference                                                       | acc. to EN 61000-6-2                    |
| EMC emission of interference                                                       | acc. to EN 61000-6-4                    |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43   |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                  |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                  |

## Commercial data

|                    |                 |
|--------------------|-----------------|
| Product Group      | 15 (Remote I/O) |
| Country of origin  | DE              |
| GTIN               | 4045454394400   |
| Customs Tariff No. | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                                   | Additional Approval Text | Certificate name                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------|-----------------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH                                | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|  | TUEV Nord<br>TUEV Nord Cert GmbH                           | IEC 60079-0              | IECEx<br>TUN<br>09.0001 X         |
|  | UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | ANSI/ISA 12.12.01        | E198726<br>Sec.1                  |

## Country specific Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name            |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|-----------------------------|
|  | KC<br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>DIM750 |

## UL-Approvals

| Logo                                                                             | Approval                                                     | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Compatible products

## system box

|                                                                                    |                                                                                                                                     |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 850-804</b><br>IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip         | 850-804 |
|  | <b>Item no.: 850-804/000-001</b><br>IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip | 850-804 |
|  | <b>Item no.: 850-805</b><br>IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip         | 850-805 |
|  | <b>Item no.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate            | 850-814 |
|  | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate            | 850-815 |
|  | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate            | 850-816 |
|  | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate            | 850-817 |

|                                                                                    |                                                                                                                                          |                      |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                               | 850-825              |
|    | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | 850-826              |
|    | <b>Item no.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip  | 850-826<br>/002-000  |
|    | <b>Item no.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | 850-827              |
|    | <b>Item no.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip  | 850-827<br>/002-000  |
|    | <b>Item no.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip         | 850-828              |
|    | <b>Item no.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | 850-828<br>/002-000  |
|   | <b>Item no.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                               | 850-834              |
|  | <b>Item no.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | 850-835              |
|  | <b>Item no.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | 850-836              |
| <b>pluggable wiring tier</b>                                                       |                                                                                                                                          |                      |
|  | <b>Item no.: 753-110</b><br>Plug                                                                                                         | 753-110              |
|  | <b>Item no.: 753-150</b><br>753 Series coding elements                                                                                   | 753-150              |
| <b>Marking accessories</b>                                                         |                                                                                                                                          |                      |
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type                    | 2009-145             |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type            | 2009-145<br>/000-002 |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type            | 2009-145<br>/000-005 |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type            | 2009-145<br>/000-006 |

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-007 | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-012 | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | /000-023 | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-024 | 2009-145 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|    | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-002 | 248-501  |
|    | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-017 | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-023 | 248-501  |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-024 | 248-501  |
|  | <b>Item no.: 709-198</b><br>Marking strips                                                                                    |          | 709-198  |
|  | <b>Item no.: 750-100</b><br>Marker card; as a DIN A4 sheet; plain                                                             |          | 750-100  |
|  | <b>Item no.: 750-103</b><br>Group marker carrier                                                                              |          | 750-103  |





**Item no.: 750-106**  
Group marker carrier

750-106

## Carrier rail



**Item no.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

210-112



**Item no.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

210-113



**Item no.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

210-114



**Item no.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

210-115



**Item no.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-118



**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715

210-196



**Item no.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

210-197



**Item no.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-198



**Item no.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

210-504



**Item no.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

210-505



**Item no.: 210-506**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

210-506



**Item no.: 210-508**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

210-508

## shield connection



**Item no.: 790-108**  
Shield clamping saddle; 11 mm wide; diameter of compatible conductor

790-108



**Item no.: 790-116**  
Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

790-116



**Item no.: 790-124**  
Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

790-124



**Item no.: 790-140**  
Shield clamping saddle; diameter of compatible conductor

790-140



**Item no.: 790-208**  
Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

790-208



**Item no.: 790-216**  
Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

790-216





Item no.: 790-220

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

790-220

## potential distribution



Item no.: 750-614

Potential Distribution

750-614

## Supply module



Item no.: 750-601

Power Supply; 24 VDC

750-601



Item no.: 750-602

Power Supply; 24 VDC

750-602



Item no.: 750-610

Power Supply; 24 VDC; fuse holder; Diagnostics

750-610



Item no.: 750-612

Power Supply; 0 ... 230 V AC/DC

750-612



Item no.: 753-602

Power Supply; 24 VDC

753-602



Item no.: 753-612

Power Supply; 0 ... 230 V AC/DC

753-612

## Downloads

## Documentation

## Manual

4-channel, 24VDC, 0.2ms

V 1.2.0

pdf  
2.2 MB

Download

2- to 3-wire connection, low-side switching

## Bid Text

753-409

Oct 6, 2014

doc  
26.6 kB

Download

IO, 753

## Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf  
265.8 kB

Download

## System Description

750/753 Series I/O-System – General Product Information

pdf  
1.7 MB

Download

Overview on WAGO-I/O-SYSTEM 750 approvals

pdf  
780.2 kB

Download

## CAD/CAE - Smart Data

### CAD data

3D Download 753-409

URL

Download

## Product family

### **750/753 Series I/O-System**

Learn more about the product family.

Show all products from the family



Subject to changes.