

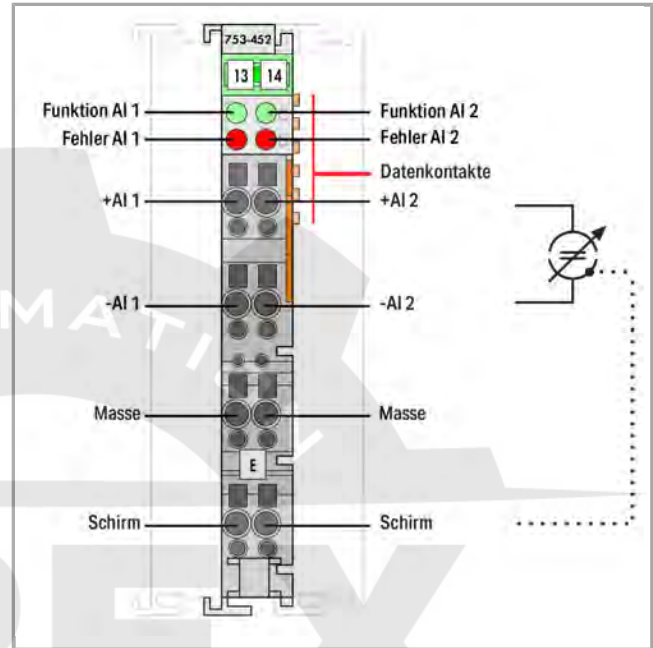


753-452

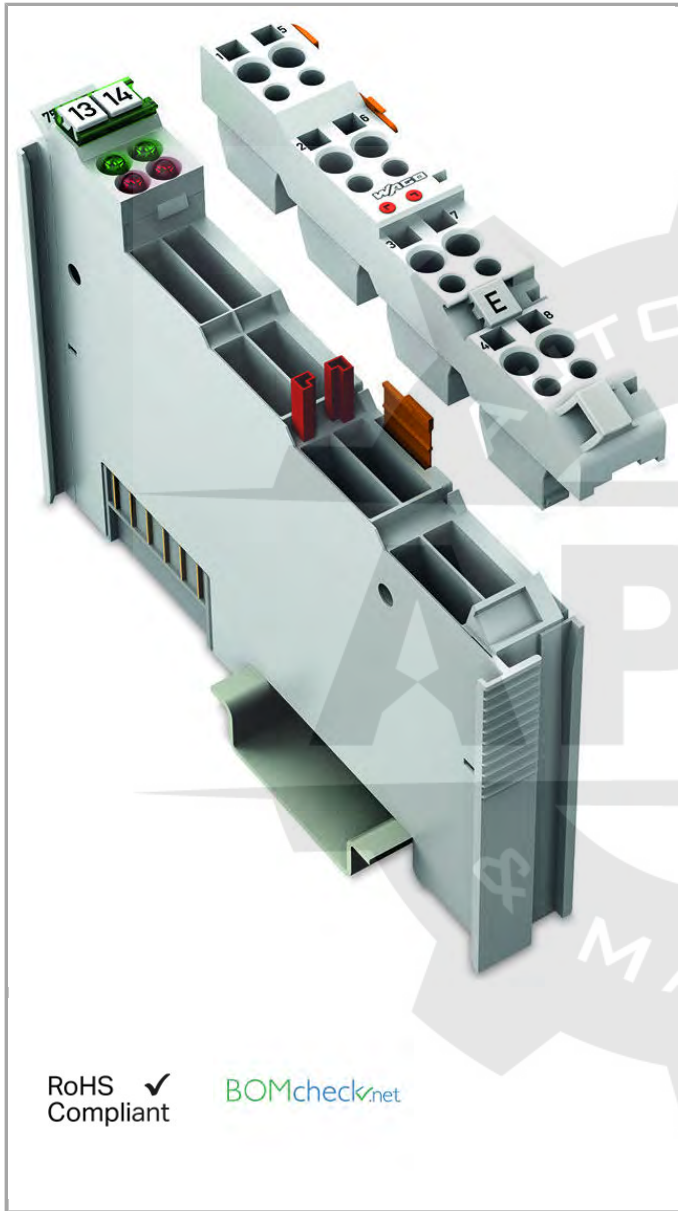

RoHS   
Compliant

[BOMcheck.net](https://www.bomcheck.net)

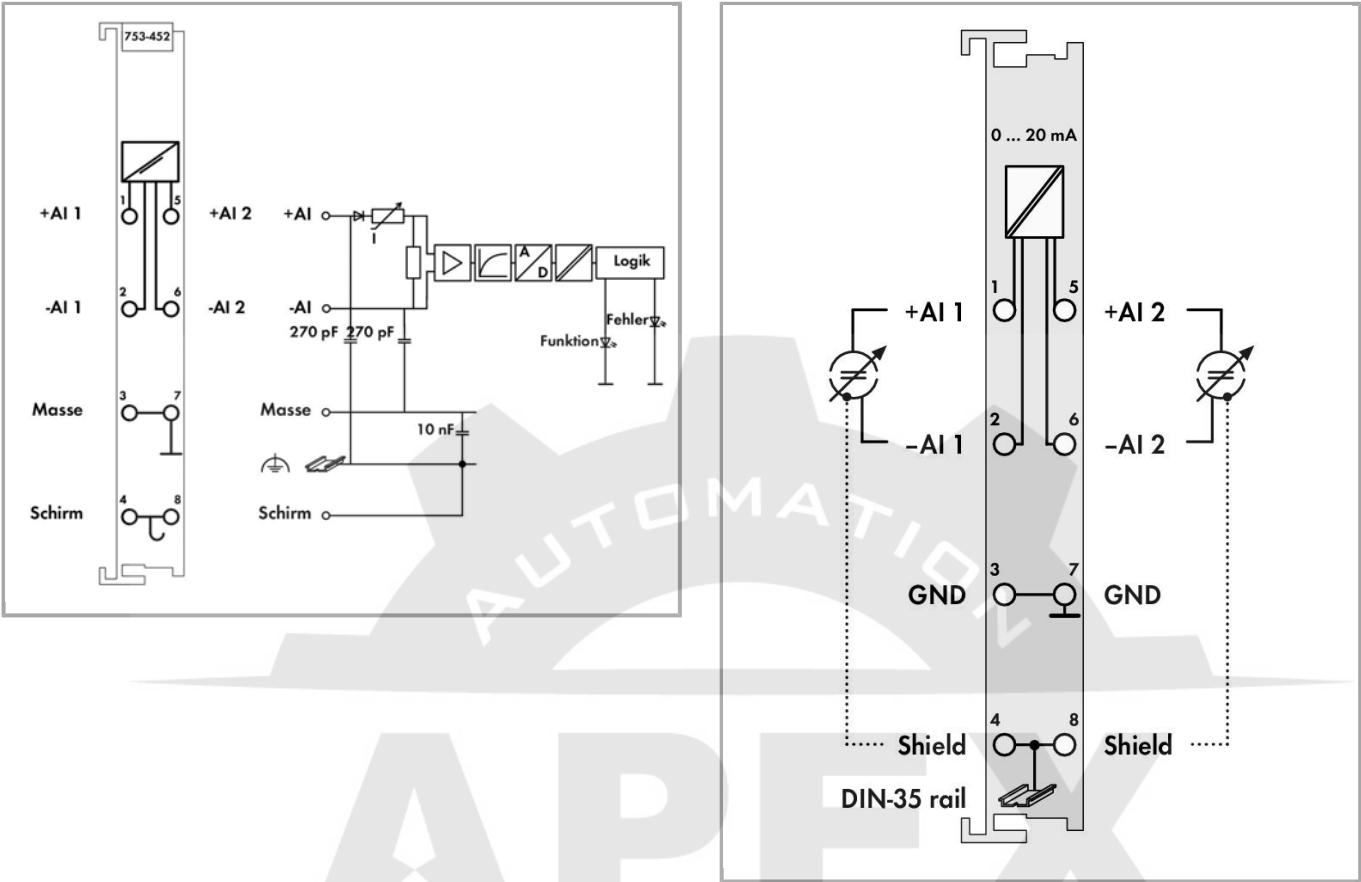

Item description

- The analog input module processes signals of a standard magnitude 0–20mA.
- The input signal is electrically isolated and is transmitted with a resolution of 12 bits.
- The internal system supply is used for the power supply of the module.
- The input channels are differential inputs.
- The shield (screen) is directly connected to the DIN rail.

Note:

WAGO's 753 Series Pluggable Connectors and Coding Fingers are not included.

Data  
Technical Data

|                                   |         |
|-----------------------------------|---------|
| Number of analog inputs           | 2       |
| Total number of channels (module) | 2       |
| Type of signal                    | Current |



|                                                     |                                                      |
|-----------------------------------------------------|------------------------------------------------------|
| Type of signal current                              | DC 0 ... 20 mA                                       |
| Sensor connection                                   | 2 x (2-conductor)                                    |
| Input voltage (max.)                                | 35 V                                                 |
| Signal characteristic                               | Differential                                         |
| Resolution [bit]                                    | 12 Bit                                               |
| Input resistance max.                               | 220 Ω                                                |
| Bit width                                           | 2 x 16-bit data; 2 x 8-bit control/status (optional) |
| Conversion time (typ. ≤)                            | 2 ms                                                 |
| Messfehler, Bezugstemperatur                        | 25 °C                                                |
| Messfehler, Abweichung max. vom Messbereichsendwert | 0.2 %                                                |
| Temperaturfehler max. vom Messbereichsendwert       | 0.01 %/K                                             |
| System supply voltage                               | DC 5 V; via data contacts                            |
| Current consumption, system supply (5 V)            | 70 mA                                                |
| System and sensor supply voltage                    | )                                                    |
| Isolation                                           | 500 V system/supply                                  |

## Connection data

|                                    |                                  |
|------------------------------------|----------------------------------|
| Connection technology: In-/Outputs | 8 x CAGE CLAMP®                  |
| Connection type (1)                | Inputs/Outputs                   |
| Solid conductor                    | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Fine-stranded conductor            | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Strip length                       | 9 ... 10 mm / 0.35 ... 0.39 inch |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 12 mm / 0.472 inch   |
| Height                                | 69.8 mm / 2.748 inch |
| Height from upper-edge of DIN-35 rail | 62.6 mm / 2.465 inch |
| Depth                                 | 100 mm / 3.937 inch  |

## Mechanical data

|                     |             |
|---------------------|-------------|
| Type of mounting    | DIN-35 rail |
| Pluggable connector | yes         |

## Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate, polyamide 6.6 |
| Weight             | 42 g                         |
| Conformity marking | 1                            |

## Environmental Requirements


|                                                                                    |                                           |
|------------------------------------------------------------------------------------|-------------------------------------------|
| Surrounding air (operating) temperature                                            | 0 ... 55 °C                               |
| Surrounding air (storage) temperature                                              | -40 ... 85 °C                             |
| Protection class                                                                   | IP20                                      |
| Degree of pollution (5)                                                            | 2 per IEC 61131-2                         |
| Operating altitude                                                                 | 0 ... 2000 m                              |
| Mounting position                                                                  | horizontal (standing/lying) or vertical   |
| Relative air humidity (no condensation)                                            | 95 %                                      |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                      |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                    |
| EMC immunity to interference                                                       | acc. to EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | acc. to EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43     |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                    |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                    |

## Commercial data

|                    |                 |
|--------------------|-----------------|
| Product Group      | 15 (Remote I/O) |
| Country of origin  | DE              |
| GTIN               | 4045454484118   |
| Customs Tariff No. | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                                   | Additional Approval Text | Certificate name                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------|-----------------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH                                | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|  | TUEV Nord<br>TUEV Nord Cert GmbH                           | IEC 60079-0              | IECEx<br>TUN<br>09.0001 X         |
|  | UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | ANSI/ISA 12.12.01        | E198726<br>Sec.1                  |

#### Country specific Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name            |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|-----------------------------|
|  | KC<br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>AIM750 |
|  | KC<br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>AIM750 |

#### Ship Approvals

| Logo                                                                                | Approval                                         | Additional Approval Text | Certificate name      |
|-------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|-----------------------|
|     | ABS<br>American Bureau of Shipping               | -                        | 19-<br>HG1821926      |
|  | BV<br>Bureau Veritas S.A.                        | -                        | 13453/DO BV           |
|   | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194            |
|   | KR<br>Korean Register of Shipping                | -                        | HMB05880-<br>AC001    |
|  | LR<br>Lloyds Register                            | -                        | 02/20026 (E5)         |
|  | PRS<br>Polski Rejestr Statków                    | -                        | TE/2236<br>/880590/19 |
|   | RINA<br>RINA Germany GmbH                        | -                        | ELE134212XG           |

#### UL-Approvals

| Logo                                                                             | Approval                                                     | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Compatible products

## pluggable wiring tier



Item no.: 753-110  
Plug

753-110



Item no.: 753-150  
753 Series coding elements

753-150

## Carrier rail



Item no.: 210-112  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

210-112



Item no.: 210-113  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

210-113



Item no.: 210-114  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

210-114



Item no.: 210-115  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

210-115



Item no.: 210-118  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-118



Item no.: 210-196  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715

210-196



Item no.: 210-197  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

210-197



Item no.: 210-198  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-198



Item no.: 210-504  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

210-504



Item no.: 210-505  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

210-505



Item no.: 210-506  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

210-506

**Item no.: 210-508**

210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

**Marking accessories**

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         |          | 2009-145 |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-002 | 2009-145 |
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-005 | 2009-145 |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-006 | 2009-145 |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-007 | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-012 | 2009-145 |
|   | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | /000-023 | 2009-145 |
|  | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-024 | 2009-145 |
|  | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-002 | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-012 | 248-501  |





**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-017

248-501



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-023

248-501



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-024

248-501



**Item no.: 709-198**  
Marking strips

709-198



**Item no.: 750-100**  
Marker card; as a DIN A4 sheet; plain

750-100



**Item no.: 750-103**  
Group marker carrier

750-103



**Item no.: 750-106**  
Group marker carrier

750-106

## shield connection



**Item no.: 790-108**  
Shield clamping saddle; 11 mm wide; diameter of compatible conductor

790-108



**Item no.: 790-116**  
Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

790-116



**Item no.: 790-124**  
Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

790-124



**Item no.: 790-140**  
Shield clamping saddle; diameter of compatible conductor

790-140



**Item no.: 790-208**  
Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

790-208



**Item no.: 790-216**  
Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

790-216



**Item no.: 790-220**  
Shield clamping saddle; 30 mm wide; 6 ... 20 mm

790-220

## system box



**Item no.: 850-804**  
IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip

850-804



**Item no.: 850-804/000-001**  
IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip

/000-001

850-804



**Item no.: 850-805**  
IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip

850-805



**Item no.: 850-814/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

/002-000

850-814



|                                                                                    |                                                                                                                                          |          |         |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
|    | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate                 | 7002-000 | 850-815 |
|    | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate                 | 7002-000 | 850-816 |
|    | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate                 | 7002-000 | 850-817 |
|    | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                               |          | 850-825 |
|    | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          |          | 850-826 |
|    | <b>Item no.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip  | 7002-000 | 850-826 |
|    | <b>Item no.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          |          | 850-827 |
|  | <b>Item no.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip  | 7002-000 | 850-827 |
|  | <b>Item no.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip         |          | 850-828 |
|  | <b>Item no.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | 7002-000 | 850-828 |
|  | <b>Item no.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                               |          | 850-834 |
|  | <b>Item no.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          |          | 850-835 |
|  | <b>Item no.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          |          | 850-836 |

## Downloads

## Documentation

## Manual

2-channel, 0-20mA, diff.

V 1.2.0

pdf  
4.1 MB

Download

**Bid Text**

|                    |             |                |          |
|--------------------|-------------|----------------|----------|
| 753-452<br>IO, 753 | Oct 6, 2014 | doc<br>28.2 kB | Download |
|--------------------|-------------|----------------|----------|

**Additional Information**

|                                                          |         |                 |          |
|----------------------------------------------------------|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|----------------------------------------------------------|---------|-----------------|----------|

**System Description**

|                                                         |  |                 |          |
|---------------------------------------------------------|--|-----------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB   | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>780.2 kB | Download |

**CAD/CAE - Smart Data****CAD data**

|                     |     |          |
|---------------------|-----|----------|
| 3D Download 753-452 | URL | Download |
|---------------------|-----|----------|

**Product family**

**750/753 Series I/O-System**  
[Learn more about the product family.](#)  
  
[Show all products from the family](#)

Subject to changes.