

## Data sheet | Item number: 756-5403/060-010

Sensor/actuator cable; fitted on both ends; 5-pole; M12 socket, angled; M12 plug, straight; 1 m





756-5403/060-010



RoHS  
Compliant

BOMcheck.net

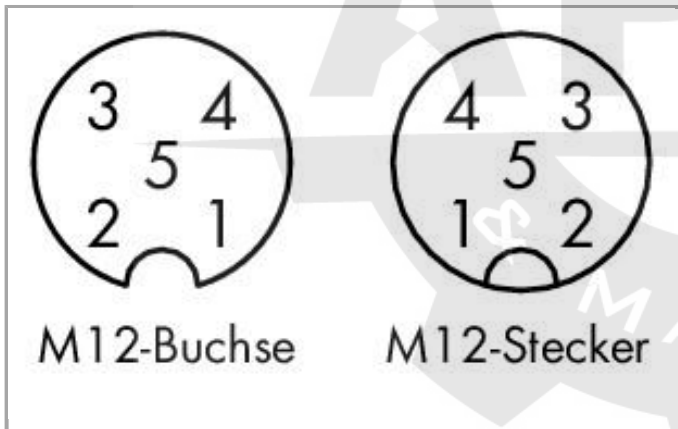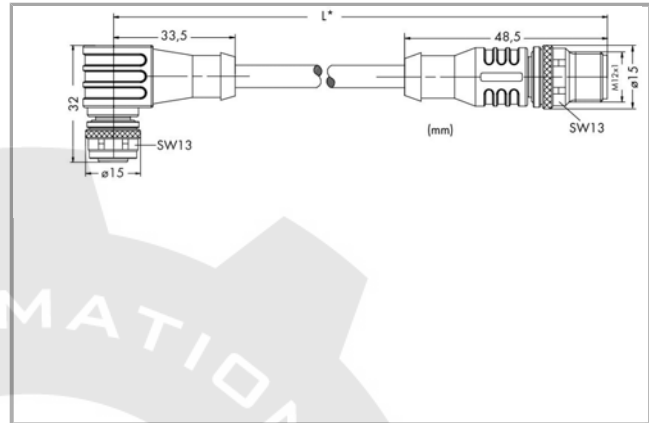

M12-Buchse

M12-Stecker

| Pin 1 ... 5: 0,34 mm <sup>2</sup> |   |             |  |   |
|-----------------------------------|---|-------------|--|---|
| 1                                 | ) | braun (+)   |  | 1 |
| 2                                 | ) | weiß (Ö)    |  | 2 |
| 3                                 | ) | blau (-)    |  | 3 |
| 4                                 | ) | schwarz (S) |  | 4 |
| 5                                 | ) | grau        |  | 5 |
| Schirm                            |   |             |  |   |

### Item description

#### Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

## Data

### Technical Data

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Connection type                                  | M12 socket - M12 plug |
| No. of poles                                     | 5                     |
| Anschlusspunkt geschirmt                         | yes                   |
| Leistungsanschlussrichtung zur Steckrichtung     | 90°                   |
| Leistungsanschlussrichtung zur Steckrichtung (2) | 0°                    |
| Steckgesichtskodierung Leitung/Adapter 1 1       | A coded               |
| Steckgesichtskodierung Leitung/Adapter 2 1       | A coded               |
| Cable length                                     | 1 m                   |
| Operating voltage                                | AC/DC 250 V           |
| Operating current                                | 4 A                   |
| Rated surge voltage                              | 1,5 kV                |

### Mechanical data

|                               |                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------|
| Bending cycles                | 2 Mio.                                                                                                         |
| Schleppkettentauglichkeit     | yes                                                                                                            |
| Color of sheathed cable       | black                                                                                                          |
| Durchmesser der Mantelleitung | 6.3 ... 6.7 mm                                                                                                 |
| Sheath material               | Polyurethane (OPUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing |
| Halogen-free                  | Yes                                                                                                            |
| Housing material              | Polyurethan (PUR)                                                                                              |
| Contact material              | CuSn                                                                                                           |
| Contact plating               | CuNi/Au                                                                                                        |
| Tightening torque             | 1 Nm                                                                                                           |
| Weight                        | 99 g                                                                                                           |

### Environmental Requirements

|                                      |                    |
|--------------------------------------|--------------------|
| Umgebungstemperatur (Betrieb) bewegt | -25 ... +90 °C     |
| Umgebungstemperatur (Betrieb) ruhend | -50 ... +90 °C     |
| Protection class                     | IP67               |
| Degree of pollution (5)              | 3 acc. to VDE 0110 |

### Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | HU            |
| GTIN               | 4045454724603 |
| Customs Tariff No. | 85444290900   |



Downloads  
Documentation  
System Description

IP67 Cables and Pluggable Connectors

pdf  
293.9 kB

Download



Subject to changes.