


Data sheet | Item number: 769-162/769-313

2-pin terminal block for pluggable modules; 4-pole; with 2 jumper positions;
with orange separator plate; for DIN-rail 35 x 15 and 35 x 7.5




769-162/769-313

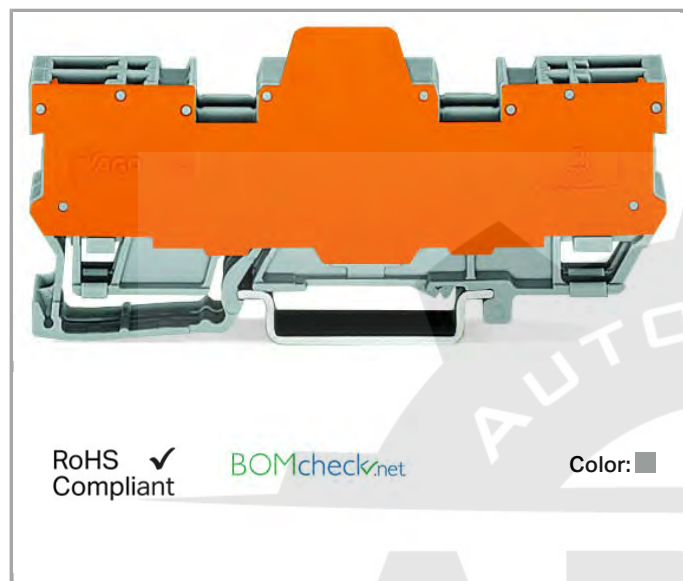

RoHS
Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color: ■

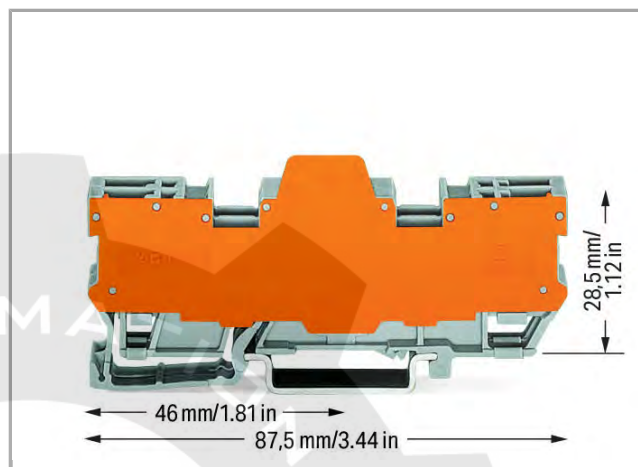

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	400 V
Rated impulse voltage (III / 3)	6 kV
Rated current	16 A

Connection data

No. of poles	4
Total number of potentials	4
Number of levels	1
Type of wiring	Front-entry wiring

Geometrical Data

Width	11.1 mm / 0.437 inch
Height from upper-edge of DIN-35 rail	28.5 mm / 1.122 inch
Depth	87.5 mm / 3.445 inch

Mechanical data

Design	horizontal
--------	------------

Type of mounting	DIN-35 rail
Marking level	Center marking

Material Data

Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load	0.402 MJ
Weight	17.69 g

Commercial data

Product Group	18 (X-COM-System)
Country of origin	DE
GTIN	4044918630146
Customs Tariff No.	85369010000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL-7626
	CSA DEKRA Certification B.V.	C22.2 No. 158	1101144
	KEMA/KEUR DEKRA Certification B.V.	EN 60947	2190419.01

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	EN 60947	14-HG1293677-PDA

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UR Underwriters Laboratories Inc.	UL 1977	E45171



UR
Underwriters Laboratories Inc.

UL 1059

E45172

Compatible products

check



Item no.: 210-137
Test plug; 2.3 mm Ø; with 500 mm cable

210-137

Female plug



Item no.: 769-101
1-conductor female plug; 4 mm²; 1-pole

769-101



Item no.: 769-101/000-006
1-conductor female plug; 4 mm²; 1-pole

769-101

/000-006



Item no.: 769-101/000-016
1-conductor female plug; 4 mm²; 1-pole

769-101

/000-016



Item no.: 769-101/022-000
1-conductor female plug; angled; 4 mm²; 1-pole

769-101

/022-000



Item no.: 769-101/022-016
1-conductor female plug; angled; 4 mm²; 1-pole

769-101

/022-016



Item no.: 769-102
1-conductor female plug; 4 mm²; 2-pole

769-102



Item no.: 769-102/000-006
1-conductor female plug; 4 mm²; 2-pole

769-102

/000-006



Item no.: 769-102/000-036
1-conductor female plug; 4 mm²; 2-pole

769-102

/000-036

	Item no.: 769-102/000-037 1-conductor female plug; 4 mm²; 2-pole	/000-037	769-102
	Item no.: 769-102/022-000 1-conductor female plug; angled; 4 mm²; 2-pole	/022-000	769-102
	Item no.: 769-103 1-conductor female plug; 4 mm²; 3-pole		769-103
	Item no.: 769-103/000-006 1-conductor female plug; 4 mm²; 3-pole	/000-006	769-103
	Item no.: 769-103/000-036 1-conductor female plug; 4 mm²; 3-pole	/000-036	769-103
	Item no.: 769-103/000-037 1-conductor female plug; 4 mm²; 3-pole	/000-037	769-103
	Item no.: 769-103/000-038 1-conductor female plug; 4 mm²; 3-pole	/000-038	769-103
	Item no.: 769-103/000-039 1-conductor female plug; 4 mm²; 3-pole	/000-039	769-103
	Item no.: 769-103/022-000 1-conductor female plug; angled; 4 mm²; 3-pole	/022-000	769-103
	Item no.: 769-104 1-conductor female plug; 4 mm²; 4-pole		769-104
	Item no.: 769-104/000-006 1-conductor female plug; 4 mm²; 4-pole	/000-006	769-104
	Item no.: 769-104/000-036 1-conductor female plug; 4 mm²; 4-pole	/000-036	769-104
	Item no.: 769-104/000-037 1-conductor female plug; 4 mm²; 4-pole	/000-037	769-104
	Item no.: 769-104/000-038 1-conductor female plug; 4 mm²; 4-pole	/000-038	769-104
	Item no.: 769-104/000-039 1-conductor female plug; 4 mm²; 4-pole	/000-039	769-104



Item no.: 769-104/022-000
1-conductor female plug; angled; 4 mm²; 4-pole

/022-000

769-104



Item no.: 769-105
1-conductor female plug; 4 mm²; 5-pole

769-105



Item no.: 769-105/000-006
1-conductor female plug; 4 mm²; 5-pole

/000-006

769-105



Item no.: 769-105/000-036
1-conductor female plug; 4 mm²; 5-pole

/000-036

769-105



Item no.: 769-105/000-037
1-conductor female plug; 4 mm²; 5-pole

/000-037

769-105



Item no.: 769-105/000-038
1-conductor female plug; 4 mm²; 5-pole

/000-038

769-105



Item no.: 769-105/000-039
1-conductor female plug; 4 mm²; 5-pole

/000-039

769-105



Item no.: 769-105/022-000
1-conductor female plug; angled; 4 mm²; 5-pole

/022-000

769-105



Item no.: 769-106
1-conductor female plug; 4 mm²; 6-pole

769-106



Item no.: 769-106/000-006
1-conductor female plug; 4 mm²; 6-pole

/000-006

769-106



Item no.: 769-106/000-036
1-conductor female plug; 4 mm²; 6-pole

/000-036

769-106



Item no.: 769-106/000-037
1-conductor female plug; 4 mm²; 6-pole

/000-037

769-106



Item no.: 769-106/000-038
1-conductor female plug; 4 mm²; 6-pole

/000-038

769-106



Item no.: 769-106/000-039
1-conductor female plug; 4 mm²; 6-pole

/000-039

769-106



Item no.: 769-106/022-000
1-conductor female plug; angled; 4 mm²; 6-pole

/022-000

769-106

	Item no.: 769-107 1-conductor female plug; 4 mm ² ; 7-pole	769-107
	Item no.: 769-107/000-006 1-conductor female plug; 4 mm ² ; 7-pole	769-107 /000-006
	Item no.: 769-107/000-036 1-conductor female plug; 4 mm ² ; 7-pole	769-107 /000-036
	Item no.: 769-107/000-037 1-conductor female plug; 4 mm ² ; 7-pole	769-107 /000-037
	Item no.: 769-107/000-038 1-conductor female plug; 4 mm ² ; 7-pole	769-107 /000-038
	Item no.: 769-107/000-039 1-conductor female plug; 4 mm ² ; 7-pole	769-107 /000-039
	Item no.: 769-107/022-000 1-conductor female plug; angled; 4 mm ² ; 7-pole	769-107 /022-000
	Item no.: 769-108 1-conductor female plug; 4 mm ² ; 8-pole	769-108
	Item no.: 769-108/000-006 1-conductor female plug; 4 mm ² ; 8-pole	769-108 /000-006
	Item no.: 769-108/000-036 1-conductor female plug; 4 mm ² ; 8-pole	769-108 /000-036
	Item no.: 769-108/000-037 1-conductor female plug; 4 mm ² ; 8-pole	769-108 /000-037
	Item no.: 769-108/000-038 1-conductor female plug; 4 mm ² ; 8-pole	769-108 /000-038
	Item no.: 769-108/000-039 1-conductor female plug; 4 mm ² ; 8-pole	769-108 /000-039
	Item no.: 769-108/022-000 1-conductor female plug; angled; 4 mm ² ; 8-pole	769-108 /022-000
	Item no.: 769-109 1-conductor female plug; 4 mm ² ; 9-pole	769-109



Item no.: 769-109/000-006
1-conductor female plug; 4 mm²; 9-pole

/000-006

769-109



Item no.: 769-109/000-036
1-conductor female plug; 4 mm²; 9-pole

/000-036

769-109



Item no.: 769-109/000-037
1-conductor female plug; 4 mm²; 9-pole

/000-037

769-109



Item no.: 769-109/000-038
1-conductor female plug; 4 mm²; 9-pole

/000-038

769-109



Item no.: 769-109/000-039
1-conductor female plug; 4 mm²; 9-pole

/000-039

769-109



Item no.: 769-109/022-000
1-conductor female plug; angled; 4 mm²; 9-pole

/022-000

769-109



Item no.: 769-110
1-conductor female plug; 4 mm²; 10-pole

769-110



Item no.: 769-110/000-006
1-conductor female plug; 4 mm²; 10-pole

/000-006

769-110



Item no.: 769-110/000-036
1-conductor female plug; 4 mm²; 10-pole

/000-036

769-110



Item no.: 769-110/000-037
1-conductor female plug; 4 mm²; 10-pole

/000-037

769-110



Item no.: 769-110/000-038
1-conductor female plug; 4 mm²; 10-pole

/000-038

769-110



Item no.: 769-110/000-039
1-conductor female plug; 4 mm²; 10-pole

/000-039

769-110



Item no.: 769-110/022-000
1-conductor female plug; angled; 4 mm²; 10-pole

/022-000

769-110



Item no.: 769-111
1-conductor female plug; 4 mm²; 11-pole

769-111



Item no.: 769-111/000-006
1-conductor female plug; 4 mm²; 11-pole

/000-006

769-111

	Item no.: 769-111/000-036 1-conductor female plug; 4 mm ² ; 11-pole	/000-036	769-111
	Item no.: 769-111/000-037 1-conductor female plug; 4 mm ² ; 11-pole	/000-037	769-111
	Item no.: 769-111/000-038 1-conductor female plug; 4 mm ² ; 11-pole	/000-038	769-111
	Item no.: 769-111/000-039 1-conductor female plug; 4 mm ² ; 11-pole	/000-039	769-111
	Item no.: 769-111/022-000 1-conductor female plug; angled; 4 mm ² ; 11-pole	/022-000	769-111
	Item no.: 769-112 1-conductor female plug; 4 mm ² ; 12-pole		769-112
	Item no.: 769-112/000-006 1-conductor female plug; 4 mm ² ; 12-pole	/000-006	769-112
	Item no.: 769-112/000-036 1-conductor female plug; 4 mm ² ; 12-pole	/000-036	769-112
	Item no.: 769-112/000-037 1-conductor female plug; 4 mm ² ; 12-pole	/000-037	769-112
	Item no.: 769-112/000-038 1-conductor female plug; 4 mm ² ; 12-pole	/000-038	769-112
	Item no.: 769-112/000-039 1-conductor female plug; 4 mm ² ; 12-pole	/000-039	769-112
	Item no.: 769-112/022-000 1-conductor female plug; angled; 4 mm ² ; 12-pole	/022-000	769-112
	Item no.: 769-113 1-conductor female plug; 4 mm ² ; 13-pole		769-113
	Item no.: 769-113/000-036 1-conductor female plug; 4 mm ² ; 13-pole	/000-036	769-113
	Item no.: 769-113/000-037 1-conductor female plug; 4 mm ² ; 13-pole	/000-037	769-113



Item no.: 769-113/000-038
1-conductor female plug; 4 mm²; 13-pole

/000-038

769-113



Item no.: 769-113/000-039
1-conductor female plug; 4 mm²; 13-pole

/000-039

769-113



Item no.: 769-113/022-000
1-conductor female plug; angled; 4 mm²; 13-pole

/022-000

769-113



Item no.: 769-114
1-conductor female plug; 4 mm²; 14-pole

769-114



Item no.: 769-114/000-006
1-conductor female plug; 4 mm²; 14-pole

/000-006

769-114



Item no.: 769-114/000-036
1-conductor female plug; 4 mm²; 14-pole

/000-036

769-114



Item no.: 769-114/000-037
1-conductor female plug; 4 mm²; 14-pole

/000-037

769-114



Item no.: 769-114/000-038
1-conductor female plug; 4 mm²; 14-pole

/000-038

769-114



Item no.: 769-114/000-039
1-conductor female plug; 4 mm²; 14-pole

/000-039

769-114



Item no.: 769-114/022-000
1-conductor female plug; angled; 4 mm²; 14-pole

/022-000

769-114



Item no.: 769-115
1-conductor female plug; 4 mm²; 15-pole

769-115



Item no.: 769-115/000-036
1-conductor female plug; 4 mm²; 15-pole

/000-036

769-115



Item no.: 769-115/000-037
1-conductor female plug; 4 mm²; 15-pole

/000-037

769-115



Item no.: 769-115/000-038
1-conductor female plug; 4 mm²; 15-pole

/000-038

769-115



Item no.: 769-115/000-039
1-conductor female plug; 4 mm²; 15-pole

/000-039

769-115



Item no.: 769-115/022-000
1-conductor female plug; angled; 4 mm²; 15-pole

769-115

/022-000

tools



Item no.: 210-720
Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720

General accessories



Item no.: 280-404
Test plug adapter; 5 mm wide; for test plug 210-137 (2.3 mm Ø); suitable for 1.5 mm² - 4 mm² tbs

280-404



Item no.: 280-418
Test plug module; modular; suitable for all WAGO 280 and 780 Series rail-mounted terminal blocks with jumper slots in the current bar

280-418



Item no.: 280-419
Spacer module; modular; bridging commoned terminal blocks

280-419



Item no.: 280-804
Empty component plug housing; 10 mm wide; Type 3; 4-pole

280-804



Item no.: 286-110
Empty component plug housing; Type 9; 10 mm wide; 4-pole

286-110



Item no.: 286-113
Empty component plug housing; Type 12; 25 mm wide; 10-pole

286-113



Item no.: 286-336/001-000
Relay module; Nominal input voltage: 24 VDC; 2 break and 2 make contacts; Red status indicator; Module width: 25 mm

286-336

/001-000



Item no.: 286-344/004-000
Relay module; Nominal input voltage: 24 VDC; 3 break contacts and 1 make contact; Path; Red status indicator; Module width: 25 mm

286-344

/004-000



Item no.: 286-352/004-000
Relay module; Nominal input voltage: 24 VDC; 4 make contacts; Limiting continuous current: 5 A; Path; Red status indicator; Module width: 25 mm

286-352

/004-000



Item no.: 286-364
Relay module; Nominal input voltage: 24 VDC; 1 make contact; Limiting continuous current: 5 A; Red status indicator; Module width: 10 mm

286-364



Item no.: 286-364/004-000
Relay module; Nominal input voltage: 24 VDC; 1 make contact; Path; Red status indicator; Module width: 10 mm

286-364

/004-000



Item no.: 286-368
Relay module; Nominal input voltage: 24 VDC; 1 break contact; Limiting continuous current: 5 A; Red status indicator; Module width: 10 mm

286-368



Item no.: 286-368/004-000
Relay module; Nominal input voltage: 24 VDC; 1 break contact; Limiting continuous current: 5 A; Path; Red status indicator; 10 mm wide

286-368

/004-000



Item no.: 286-664
Current flow monitoring module; AC current flow monitoring module; 1 A ... 10 A; Adjustable; Relay with 1 changeover contact (1u)

286-664

	Item no.: 286-665 Current flow monitoring module; Relay with 1 changeover contact (1u); adjustable	286-665
	Item no.: 286-742 S0 interface power supply; Input voltage: 230 VAC; S0 interface	286-742
	Item no.: 286-791 Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 20 ... 60 VDC; Limiting continuous current: 0.1 A; 2-wire connection; Frequency: 3 kHz; Red status indicator; Module width: 10 mm	286-791
	Item no.: 286-794 Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 20 ... 60 VDC; Limiting continuous current: 0.1 A; 2-wire connection; Red status indicator; Module width: 10 mm	286-794
	Item no.: 286-803 Component module with diode	286-803
	Item no.: 286-809 Component module with diode	286-809
	Item no.: 286-822 Component module with LED; Red LED; with common cathode	286-822
	Item no.: 286-826 AND gate module with 6 inputs	286-826
	Item no.: 286-841 Surge suppression module for signal technology; Nominal voltage: 220 VDC; for 2 signal paths with common surge arrester; pluggable on rail-mount terminal block, 25 mm wide	286-841
	Item no.: 286-842 Surge suppression module for signal technology; Nominal voltage: 230 VAC; for 2 signal paths with common surge arrester; pluggable on rail-mount terminal block, 25 mm wide	286-842
	Item no.: 286-843 Surge suppression module for signal technology; Nominal voltage: 115 VAC; for 2 signal paths with common surge arrester; pluggable on rail-mount terminal block, 25 mm wide	286-843
	Item no.: 286-844 Surge suppression module for signal technology; for 2 signal paths with common surge arrester; pluggable on rail-mount terminal block, 25 mm wide	286-844
	Item no.: 286-890 Component module with fuse; for (5 x 20) mm microfuse; Nominal voltage: 24 VAC/DC	286-890
	Item no.: 286-891 Component module with fuse; for (5 x 20) mm microfuse; Nominal voltage: 230 VAC/DC	286-891
	Item no.: 769-438 Pin cover; with marker slot for miniature WSB	769-438
	Item no.: 769-439 Pin cover; with marker slot for miniature WSB	769-439
	Item no.: 769-501 Start module for 1-conductor female connector; with integrated end plate; 4 mm ² ; 1-pole	769-501
	Item no.: 769-501/000-006 Start module for 1-conductor female connector; 4 mm ² ; 1-pole	769-501 /000-006

	Item no.: 769-501/000-016 Start module for 1-conductor female connector; with integrated end plate; 4 mm ² ; 1-pole	/000-016	769-501
	Item no.: 769-502 Center module for 1-conductor female connector; 4 mm ² ; 1-pole		769-502
	Item no.: 769-502/000-006 Center module for 1-conductor female connector; 4 mm ² ; 1-pole	/000-006	769-502
	Item no.: 769-502/000-016 Center module for 1-conductor female connector; 4 mm ² ; 1-pole	/000-016	769-502
	Item no.: 769-503 End module for 1-conductor female connector; 4 mm ² ; 1-pole		769-503
	Item no.: 769-503/000-006 End module for 1-conductor female connector; 4 mm ² ; 1-pole	/000-006	769-503
	Item no.: 769-503/000-016 End module for 1-conductor female connector; 4 mm ² ; 1-pole	/000-016	769-503
	Item no.: 769-512 Start module for 1-conductor female connector; angled; 4 mm ² ; 1-pole		769-512
	Item no.: 769-512/000-006 Start module for 1-conductor female connector; angled; 4 mm ² ; 1-pole	/000-006	769-512
	Item no.: 769-512/000-016 Start module for 1-conductor female connector; angled; 4 mm ² ; 1-pole	/000-016	769-512
	Item no.: 769-513 Center module for 1-conductor female connector; angled; 4 mm ² ; 1-pole		769-513
	Item no.: 769-513/000-006 1-conductor center module; angled; codable; 1-pole	/000-006	769-513
	Item no.: 769-513/000-016 1-conductor center module; angled; codable; 1-pole	/000-016	769-513
	Item no.: 769-515 1-conductor end module; angled; codable; 1-pole		769-515
	Item no.: 769-515/000-006 1-conductor end module; angled; codable; 1-pole	/000-006	769-515
	Item no.: 769-515/000-016 1-conductor end module; angled; codable; 1-pole	/000-016	769-515



Item no.: 786-103
Empty component plug housing; Type 16; 25 mm wide; 10-pole

786-103

Jumper



Item no.: 249-123
Push-in type wire jumper; insulated; wire length 180 mm; Conductor cross section 0.75 mm²

249-123



Item no.: 249-125
Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm²

249-125



Item no.: 249-126
Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm²

249-126



Item no.: 249-127
Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm²

249-127



Item no.: 280-402
Adjacent jumper; insulated; IN = IN terminal block

280-402



Item no.: 280-409
Alternate jumper; insulated; IN = IN terminal block

280-409



Item no.: 780-452
Staggered jumper; insulated; from 1 to 2; Spacing: 5 mm; suitable for 2-conductor female plugs

780-452



Item no.: 780-453
Staggered jumper; insulated; from 1 to 3; Spacing: 5 mm; suitable for 2-conductor female plugs

780-453



Item no.: 780-454
Staggered jumper; insulated; from 1 to 4; Spacing: 5 mm; suitable for 2-conductor female plugs

780-454



Item no.: 780-455
Staggered jumper; insulated; from 1 to 5; Spacing: 5 mm; suitable for 2-conductor female plugs

780-455



Item no.: 780-456
Staggered jumper; insulated; from 1 to 6; Spacing: 5 mm; suitable for 2-conductor female plugs

780-456



Item no.: 780-457
Staggered jumper; insulated; from 1 to 7; Spacing: 5 mm; suitable for 2-conductor female plugs

780-457



Item no.: 780-458
Staggered jumper; insulated; from 1 to 8; Spacing: 5 mm; suitable for 2-conductor female plugs

780-458

Coding



Item no.: 769-435
Coding pin; for coding of female plugs; for carrier terminal blocks / male connectors

769-435

Marking accessories



Item no.: 2009-145
Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-145



Item no.: 2009-145/000-002
Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-145

/000-002



Item no.: 2009-145/000-005
Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-145

/000-005

	Item no.: 2009-145/000-006 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-006	2009-145
	Item no.: 2009-145/000-007 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-007	2009-145
	Item no.: 2009-145/000-012 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-012	2009-145
	Item no.: 2009-145/000-023 Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-023	2009-145
	Item no.: 2009-145/000-024 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-024	2009-145
	Item no.: 248-501 Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card		248-501
	Item no.: 248-501/000-002 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-002	248-501
	Item no.: 248-501/000-005 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-005	248-501
	Item no.: 248-501/000-006 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-006	248-501
	Item no.: 248-501/000-007 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-007	248-501
	Item no.: 248-501/000-012 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-012	248-501
	Item no.: 248-501/000-017 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-017	248-501
	Item no.: 248-501/000-023 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-023	248-501
	Item no.: 248-501/000-024 Mini-WSB marking card; as card; not stretchable; plain; snap-on type	/000-024	248-501
End plate			
	Item no.: 769-309 End and intermediate plate; 1.1 mm thick		769-309



Item no.: 769-310
End and intermediate plate; 1.1 mm thick

769-310



Item no.: 769-313
Separator plate; 1.1 mm thick; oversized

769-313

Carrier rail

Item no.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

210-112



Item no.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

210-113



Item no.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

210-114




Item no.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

210-115



Item no.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-118



Item no.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715

210-196



Item no.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

210-197



Item no.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-198



Item no.: 210-504
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

210-504



Item no.: 210-505
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

210-505



Item no.: 210-506
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

210-506



Item no.: 210-508
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

210-508

assembling

Item no.: 209-106
Mounting carrier; for isolated mounting on DIN 35 rails

209-106

Downloads**Documentation****Bid Text**

769-162/769-313

doc
25.6 kB

Download



CAD/CAE - Smart Data

CAD data

3D Download 769-162/769-313	URL	Download
-----------------------------	-----	----------

Product family

- X-COM
Learn more about the product family.
- Show all products from the family



Subject to changes.