
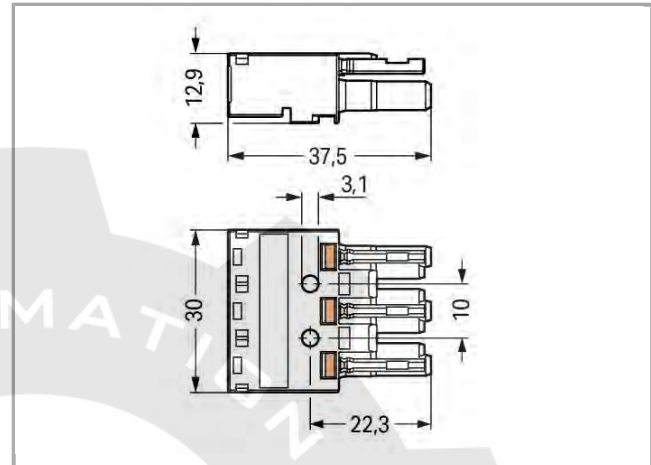


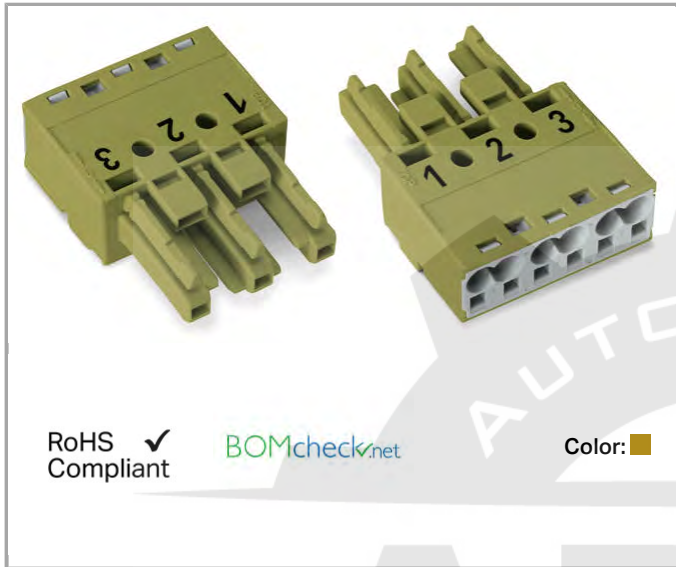

Item description

- Protected against mismatching and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Two-wire connection per pole for loops or bridges
- Additional variable coding is possible
- Components can be clearly printed on and color-coded to meet custom requirements

Note:

All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug /socket).

Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

Data

Electrical data

Note on Contact Resistance

approx. 1mΩ contact resistance approx. 0.25mΩ contact transition
plug/socket

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	25 A

Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)	600 V
Rated current per UL 1977 (factory wiring only)	23 A

Connection data

Connection technology	Push-in CAGE CLAMP®		
Actuation type	Operating tool Push-in		
Nominal cross section	4 mm ²		
Solid conductor	0.5	4 mm ² / 20	12 AWG
Solid conductor, push-in termination	1.5	4 mm ² / 16	12 AWG
Stranded conductor	0.5	2.5 mm ² / 20	14 AWG
Fine-stranded conductor	0.5	4 mm ² / 20	12 AWG
Fine-stranded conductor with ferrule with plastic collar	0.25	1.5 mm ² / 20	16 AWG
Fine-stranded conductor with ferrule without plastic collar	0.25	2.5 mm ² / 20	14 AWG
Strip length	9 mm / 0.35 inch		
Note (strip length)	see also packaging or instructions		
Total number of connection points	6		
Total number of potentials	3		
Conductor entry direction to mating direction	0°		
No. of poles	3		

Geometrical Data

Pin spacing	10 mm / 0.394 inch
Width	30 mm / 1.181 inch
Height	12.9 mm / 0.508 inch
Depth	37.5 mm / 1.476 inch

Mechanical data

Coding	B
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	When locked: > 80 N
Unmating force of a plug-in connection	when unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load

100, with resistive load $I_N = 25A$, tested (4 mm²/AWG 12)

Marking	1 2 3
Protection class	IP20
Note on protection class	Only in mated condition with strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)
Potential marking	1 2 3

Plug connection

Contact type (pluggable connector)	Female connector/socket
Connector connection type	for conductors
Mismating protection	Yes
Locking of plug-in connection	locking lever
Locking lever	no

Material Data

Color	light green
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Copper or copper alloy, surface-treated
Fire load	0.162 MJ
Weight	9.575 g

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4050821445012
Customs Tariff No.	85366990990

Approvals / Certificates

Radio-Approvals

Certificate

Logo	Approval	Additional Approval Text	name
	CCA DEKRA Certification B.V.	EN 61984	2173495.01
	CCA DEKRA Certification B.V.	IEC 61984	NL-32104

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	-	14- HG1241528- PDA
	CCA DEKRA Certification B.V.	EN 61984	2173495.01
	CCA DEKRA Certification B.V.	IEC 61984	NL-32104
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
	LR Lloyds Register	IEC 61984	02/20050 (E6)
	LR Lloyds Register	IEC 61984	02/20050 (E6)
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	-	14- HG1241528- PDA
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
	LR Lloyds Register	IEC 61984	02/20050 (E6)



Other Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cURus Underwriters Laboratories Inc.	UL 1977	E45171 Sec. 9

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cURus Underwriters Laboratories Inc.	UL 1977	E45171 Sec. 9

Compatible products

protection

	Item no.: 770-201 Lockout cap; 12-pole, separable; 12-pole; for sockets; black	770-201
	Item no.: 770-221 Lockout cap; for socket; 12-pole; separable; white	770-221

Locking lever

	Item no.: 770-101 Locking lever; for flying leads; for manual operation; black	770-101
	Item no.: 770-111 Locking lever; for flying leads; for tool operation; black	770-111
	Item no.: 770-121 Locking lever; for flying leads; for manual operation; white	770-121
	Item no.: 770-131 Locking lever; for flying leads; for tool operation; white	770-131

Strain relief plate

	Item no.: 770-503 Strain relief housing; 3-pole; for 2 cables; 8.0 ... 11.5 mm; 55 mm; black	770-503
--	---	---------



Item no.: 770-503/021-000
Strain relief housing; 3-pole; for 1 cable; 9.0 ... 13.0 mm; 71 mm; black

/021-000

770-503



Item no.: 770-503/023-000
Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; black

/023-000

770-503



Item no.: 770-503/032-000
Strain relief housing; 3-pole; with locking clip; for 2 cables; 8.0 ... 11.5 mm; 55 mm; black

/032-000

770-503



Item no.: 770-503/035-000
Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; black

/035-000

770-503



Item no.: 770-503/038-000
Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; black

/038-000

770-503



Item no.: 770-513
Strain relief housing; 3-pole; for 1 cable; 8.0 ... 11.5 mm; 55 mm; white

770-513



Item no.: 770-513/021-000
Strain relief housing; 3-pole; for 1 cable; 9.0 ... 13.0 mm; 71 mm; white

/021-000

770-513



Item no.: 770-513/023-000
Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; white

/023-000

770-513



Item no.: 770-513/032-000
Strain relief housing; 3-pole; for 2 cables; 8.0 ... 11.5 mm; 55 mm; white

/032-000

770-513



Item no.: 770-513/035-000
Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; white

/035-000

770-513



Item no.: 770-513/038-000
Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; white

/038-000

770-513

tools



Item no.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

210-719



Item no.: 770-383
Operating tool; 3-way; green

770-383

Marking accessories



Item no.: 770-450
Marker card; Plastic; white

770-450



Item no.: 770-450/000-001
Marker card; Plastic; green

/000-001

770-450




Item no.: 770-450/000-002
Marker card; Plastic; yellow

770-450
/000-002



Item no.: 770-450/000-005
Marker card; Plastic; red

770-450
/000-005



Item no.: 770-450/000-006
Marker card; Plastic; blue

770-450
/000-006



Item no.: 770-450/000-012
Marker card; Plastic

770-450
/000-012

Downloads

Documentation

Bid Text

770-263

doc
24.6 kB
Download

CAD/CAE - Smart Data

CAD data

3D Download 770-263

URL
Download

WSCAD

WSCAD Universe

Download

Subject to changes.