
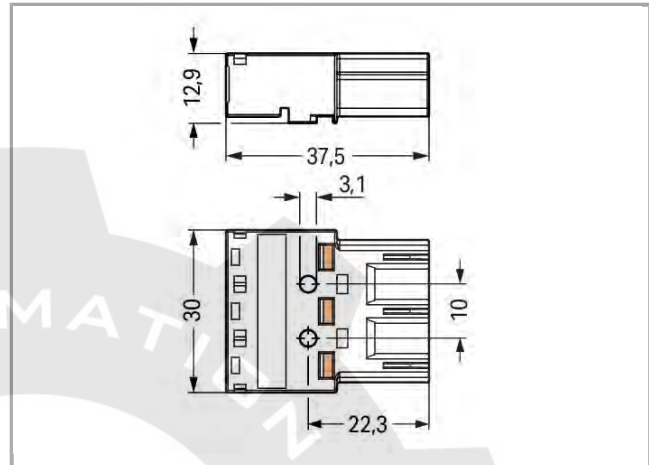


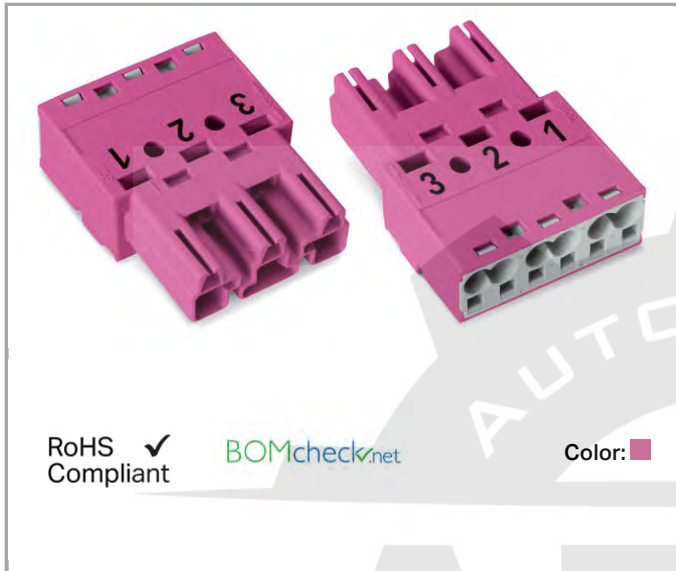

Item description

- Protected against mismatching and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Two-wire connection per pole for loops or bridges
- Additional variable coding is possible
- Components can be clearly printed on and color-coded to meet custom requirements

Note:

All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug /socket).

Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

Data

Electrical data

Note on Contact Resistance

approx. 1mΩ contact resistance approx. 0.25mΩ contact transition
plug/socket

**Ratings per IEC/EN 60664-1**

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	25 A

Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)	600 V
Rated current per UL 1977 (factory wiring only)	23 A

Connection data

Connection technology	Push-in CAGE CLAMP®		
Actuation type	Operating tool Push-in		
Nominal cross section	4 mm²		
Solid conductor	0.5	4 mm² / 20	12 AWG
Solid conductor, push-in termination	1.5	4 mm² / 16	12 AWG
Stranded conductor	0.5	2.5 mm² / 20	14 AWG
Fine-stranded conductor	0.5	4 mm² / 20	12 AWG
Fine-stranded conductor with ferrule with plastic collar	0.25	1.5 mm² / 20	16 AWG
Fine-stranded conductor with ferrule without plastic collar	0.25	2.5 mm² / 20	14 AWG
Strip length	9 mm / 0.35 inch		
Note (strip length)	see also packaging or instructions		
Total number of connection points	6		
Total number of potentials	3		
Conductor entry direction to mating direction	0°		
No. of poles	3		

Geometrical Data

Pin spacing	10 mm / 0.394 inch
Width	30 mm / 1.181 inch
Height	12.9 mm / 0.508 inch
Depth	37.5 mm / 1.476 inch

Mechanical data

Coding	B
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	When locked: > 80 N
Unmating force of a plug-in connection	when unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load

100, with resistive load $I_N = 25A$, tested (4 mm²/AWG 12)

Marking	+ S -
Protection class	IP20
Note on protection class	Only in mated condition with strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)
Potential marking	+ S -

Plug connection

Contact type (pluggable connector)	Male connector/plug
Connector connection type	for conductors
Mismating protection	Yes
Locking of plug-in connection	locking lever
Locking lever	no

Material Data

Color	pink
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Copper or copper alloy, surface-treated
Fire load	0.196 MJ
Weight	9.956 g

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Country of origin	DE
GTIN	4050821553557
Customs Tariff No.	85366990990

Approvals / Certificates

Other Approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------



cURus
Underwriters Laboratories Inc.

UL 1977


E45171
Sec. 9

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cURus Underwriters Laboratories Inc.	UL 1977	E45171 Sec. 9

Compatible products

Marking accessories

	Item no.: 770-450 Marker card; Plastic; white	770-450
	Item no.: 770-450/000-001 Marker card; Plastic; green	770-450 /000-001
	Item no.: 770-450/000-002 Marker card; Plastic; yellow	770-450 /000-002
	Item no.: 770-450/000-005 Marker card; Plastic; red	770-450 /000-005
	Item no.: 770-450/000-006 Marker card; Plastic; blue	770-450 /000-006
	Item no.: 770-450/000-012 Marker card; Plastic	770-450 /000-012

Strain relief plate

	Item no.: 770-503 Strain relief housing; 3-pole; for 2 cables; 8.0 ... 11.5 mm; 55 mm; black	770-503
	Item no.: 770-503/021-000 Strain relief housing; 3-pole; for 1 cable; 9.0 ... 13.0 mm; 71 mm; black	770-503 /021-000

**Item no.: 770-503/023-000**

Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; black

/023-000

770-503

**Item no.: 770-503/032-000**

Strain relief housing; 3-pole; with locking clip; for 2 cables; 8.0 ... 11.5 mm; 55 mm; black

/032-000

770-503

**Item no.: 770-503/035-000**

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; black

/035-000

770-503

**Item no.: 770-503/038-000**

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; black

/038-000

770-503

**Item no.: 770-513**

Strain relief housing; 3-pole; for 1 cable; 8.0 ... 11.5 mm; 55 mm; white

770-513

**Item no.: 770-513/021-000**

Strain relief housing; 3-pole; for 1 cable; 9.0 ... 13.0 mm; 71 mm; white

/021-000

770-513

**Item no.: 770-513/023-000**

Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; white

/023-000

770-513

**Item no.: 770-513/032-000**

Strain relief housing; 3-pole; for 2 cables; 8.0 ... 11.5 mm; 55 mm; white

/032-000

770-513

**Item no.: 770-513/035-000**

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; white

/035-000

770-513

**Item no.: 770-513/038-000**

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; white

/038-000

770-513

Locking lever**Item no.: 770-101**

Locking lever; for flying leads; for manual operation; black

770-101

**Item no.: 770-111**

Locking lever; for flying leads; for tool operation; black

770-111

**Item no.: 770-121**

Locking lever; for flying leads; for manual operation; white

770-121

**Item no.: 770-131**

Locking lever; for flying leads; for tool operation; white

770-131

tools**Item no.: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

210-719

**Item no.: 770-383**

Operating tool; 3-way; green

770-383



Coding

	Item no.: 770-401 Coding pin; for plugs; Plastic; gray	770-401
--	--	---------

protection

	Item no.: 770-360 Lockout cap; for plugs; 5-pole; separable; yellow	770-360
--	---	---------

Downloads
Documentation

Bid Text

770-293/082-000	doc 24.6 kB	Download
-----------------	----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 770-293/082-000	URL	Download
-----------------------------	-----	----------

WSCAD

WSCAD Universe		Download
----------------	--	----------

Subject to changes.