
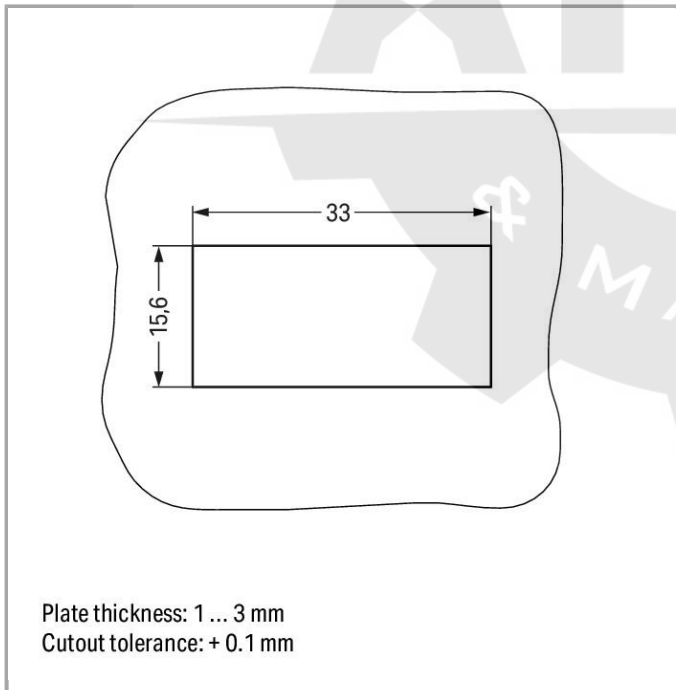
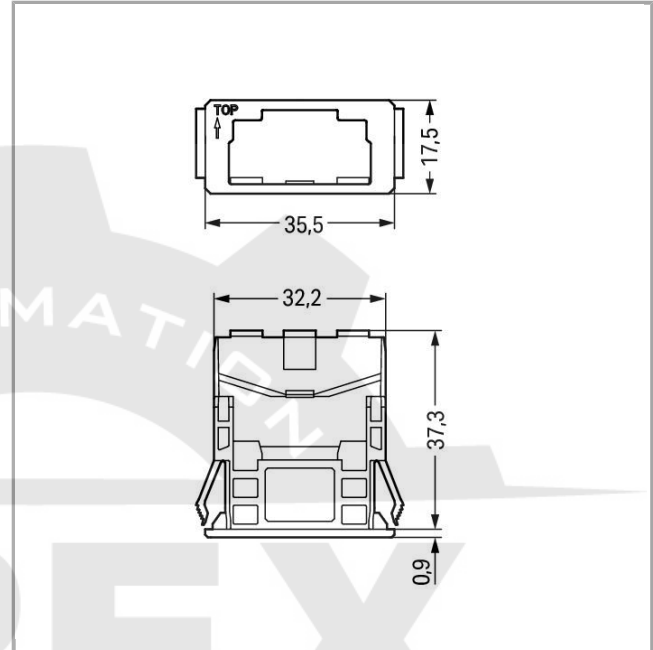


Data sheet | Item number: 770-338

Snap-in frame; 3-pole; 1.0 ... 3.0 mm; white

770-338

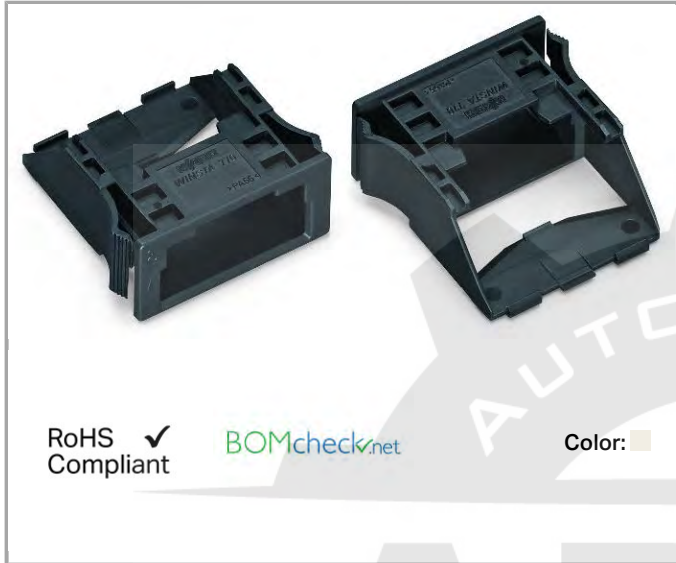

Data

Geometrical Data

Width

35.5 mm / 1.398 inch

Height	17.5 mm / 0.689 inch
Depth	38.75 mm / 1.526 inch

Mechanical data

Gehäuseblechstärke	1 3 mm / 0.039 0.118 inch
Mounting type	Snap-in

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.098 MJ
Weight	3.26 g

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4045454997212
Customs Tariff No.	39269097900

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)



Compatible products

Locking lever



Item no.: 770-140

Locking lever; for sockets; for manual operation; gray

770-140

Downloads

Documentation

Bid Text

770-338

WINSTA MIDI 3-polig

Apr 4, 2012

doc
23.6 kB

Download

CAD/CAE - Smart Data

CAD data

3D Download 770-338

URL

Download

WSCAD

WSCAD Universe

Download

Subject to changes.