
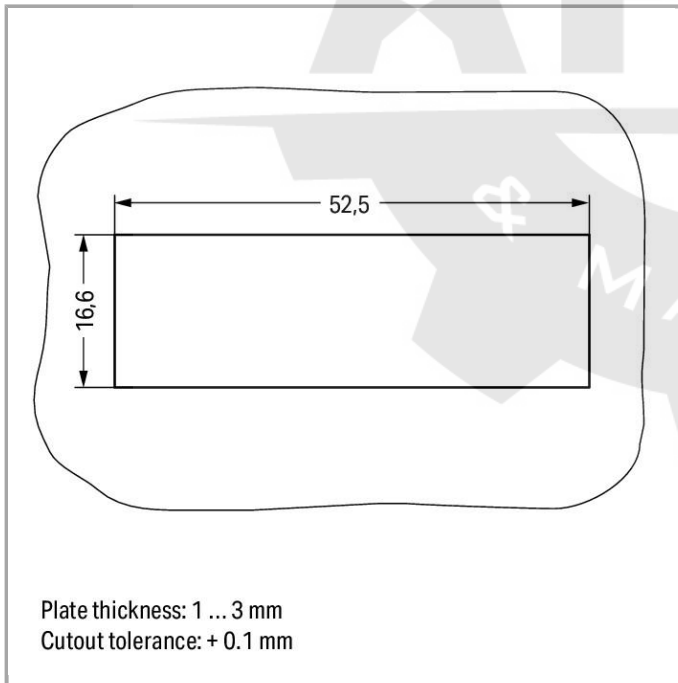
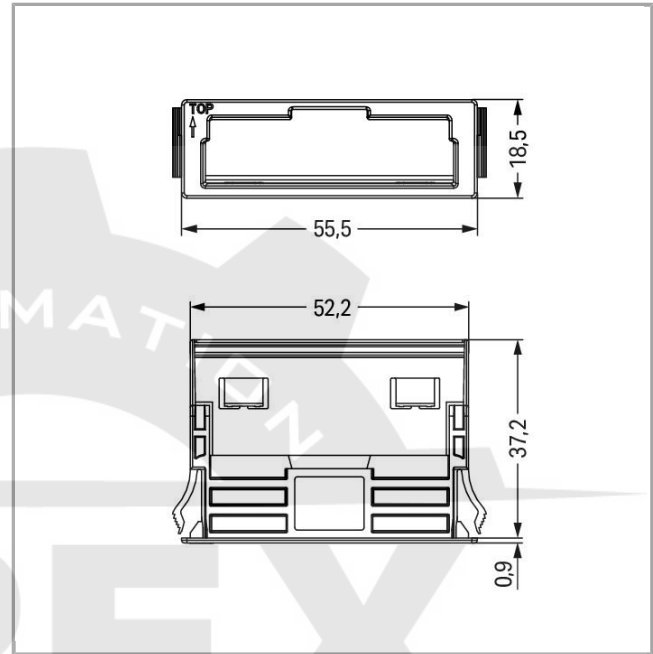


Data sheet | Item number: 770-340

Snap-in frame; 5-pole; 1.0 ... 3.0 mm; white

770-340

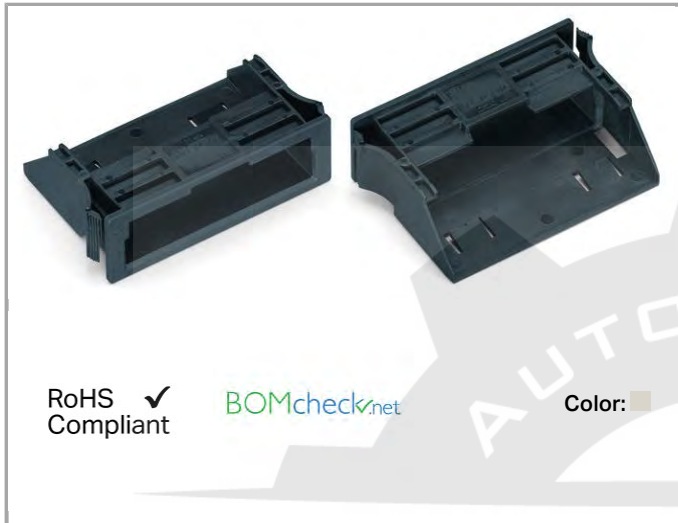

Data

Geometrical Data

Width

55.5 mm / 2.185 inch

Height	18.5 mm / 0.728 inch
Depth	37.5 mm / 1.476 inch

Mechanical data

Gehäuseblechstärke	1 3 mm / 0.039 0.118 inch
Mounting type	Snap-in

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.167 MJ
Weight	5.58 g

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4050821117889
Customs Tariff No.	39269097900

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)



Compatible products

Locking lever

	Item no.: 770-140 Locking lever; for sockets; for manual operation; gray	770-140
--	--	---------

Downloads
Documentation

Bid Text			
770-340	Apr 4, 2012	doc	Download
WINSTA MIDI 5-polig		24.1 kB	

CAD/CAE - Smart Data

CAD data			
3D Download 770-340		URL	Download
WSCAD			
WSCAD Universe			Download

Subject to changes.