

Data sheet | Item number: 770-512/041-000

Strain relief housing; 2-pole; with locking clip; for 1 cable; 7.0 ... 10.5 mm; 35 mm; white




770-512_041-000



RoHS
Compliant ✓

[BOMcheck.net](https://www.bomcheck.net)

Color: 

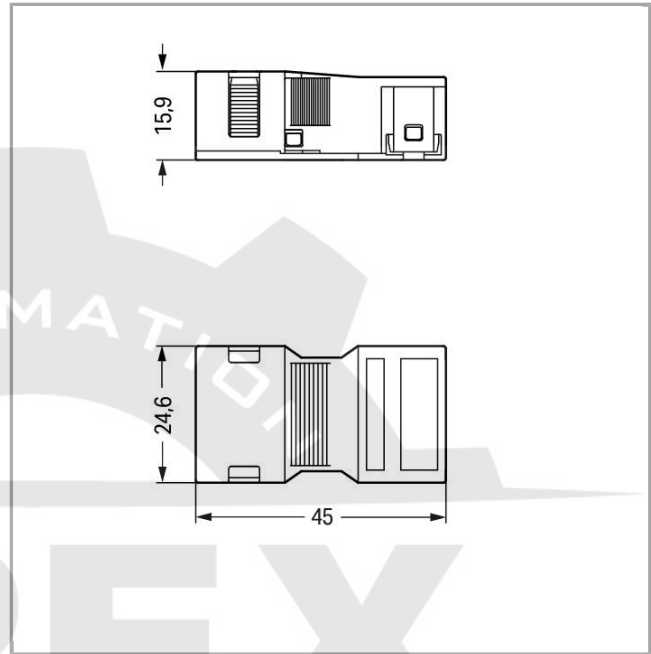

Data

Connection data

Connectable sheathed cable diameter	7 ... 10.5 mm
Strip length	35 mm
No. of poles	2

Geometrical Data

Width	24.6 mm / 0.969 inch
Height	15.9 mm / 0.626 inch
Depth	45 mm / 1.772 inch

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.192 MJ
Weight	6.65 g

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Country of origin	DE
GTIN	4050821137573
Customs Tariff No.	85389099990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Compatible products

Marking accessories

Item no.: 210-333	210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white	

Downloads

Documentation

Bid Text

770-512/041-000	Apr 4, 2012	doc 24.1 kB	Download
WINSTA MIDI 2-polig			



CAD/CAE - Smart Data

CAD data

3D Download 770-512/041-000	URL	Download
-----------------------------	-----	----------

WSCAD

WSCAD Universe	Download
----------------	----------



Subject to changes.