



Data sheet | Item number: 770-513/038-000

Strain relief housing; 3-pole; with locking clip; for 1 cable; 7.0 ... 11.5 mm; 48 mm; white

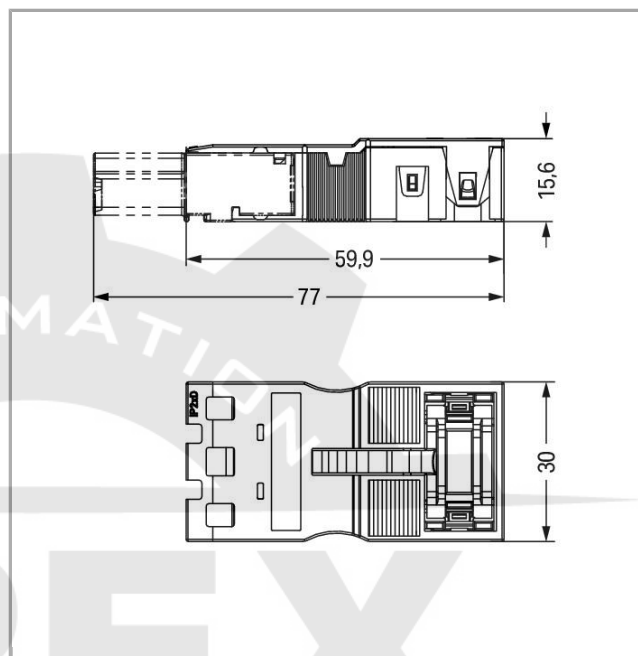

770-513_038-000

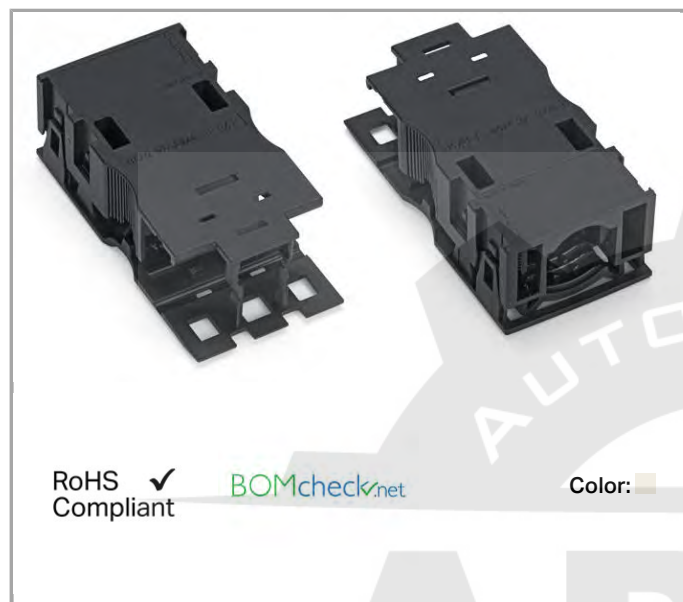

Data

Connection data

Connectable sheathed cable diameter	7 ... 11.5 mm
Strip length	48 mm
No. of poles	3

Geometrical Data

Width	30 mm / 1.181 inch
Height	15.6 mm / 0.614 inch
Depth	59.6 mm / 2.346 inch

Mechanical data

Protection class	IP 2xD
------------------	--------

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.251 MJ

Weight	8.35 g
--------	--------

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Country of origin	DE
GTIN	4050821476009
Customs Tariff No.	85389099990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	02/20050 (E6)

Other Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cULus Underwriters Laboratories Inc.	UL 1977	E45171 Sec. 9

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cULus Underwriters Laboratories Inc.	UL 1977	E45171 Sec. 9



Compatible products

Marking accessories

Item no.: 210-333	210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white	

Downloads
Documentation

Bid Text

770-513/038-000	doc 24.6 kB	Download
-----------------	----------------	----------

CAD/CAE - Smart Data
WSCAD

WSCAD Universe	Download
----------------	----------

Subject to changes.