


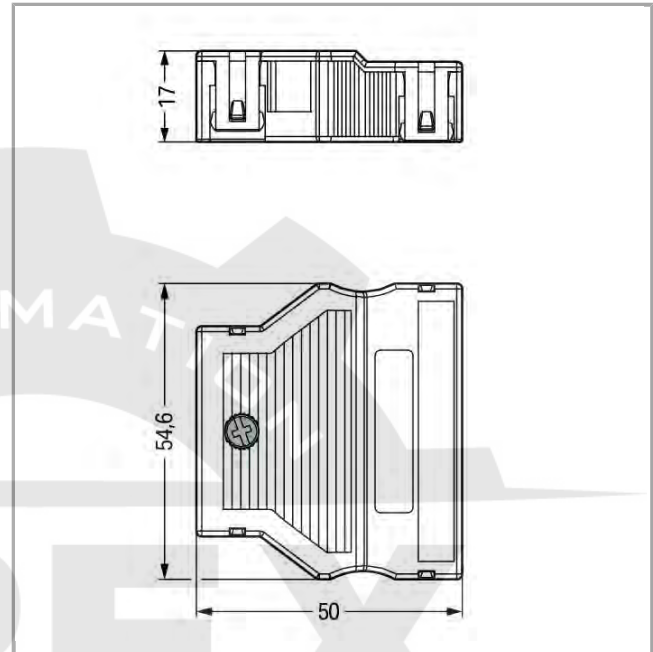

Data

Electrical data

Note on Contact Resistance

approx. 1mΩ contact resistance

approx. 0.25mΩ contact transition plug/socket

Connection data

No. of poles	5
Connectable sheathed cable diameter	5 ... 9 mm
Strip length	55 mm

Geometrical Data

Width	54.6 mm / 2.15 inch
Depth	50 mm / 1.969 inch

Mechanical data

Protection class	IP20
------------------	------

Note on protection class

Only in mated condition with strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug connection

Mismating protection	Yes
Locking of plug-in connection	locking lever

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy, surface-treated
Fire load	0.374 MJ
Weight	13.74 g

Environmental Requirements

Surrounding air (operating) temperature	-35 ... 85 °C
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4044918071765
Customs Tariff No.	85389099990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6



DNV GL	-	TAE00001Z6
Det Norske Veritas, Germanischer Lloyd		



LR	IEC 61984	02/20050
Lloyds Register		(E6)

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	cURus	UL 1977	E45171
	Underwriters Laboratories Inc.		Sec. 9

Compatible products

Marking accessories

Item no.: 210-333	210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive	

Downloads

Documentation

Bid Text

770-515/023-000	Apr 4, 2012	doc	Download
WINSTA MIDI 5-polig		24.1 kB	

CAD/CAE - Smart Data

CAD data

3D Download 770-515/023-000	URL	Download
-----------------------------	-----	----------



Subject to changes.
