




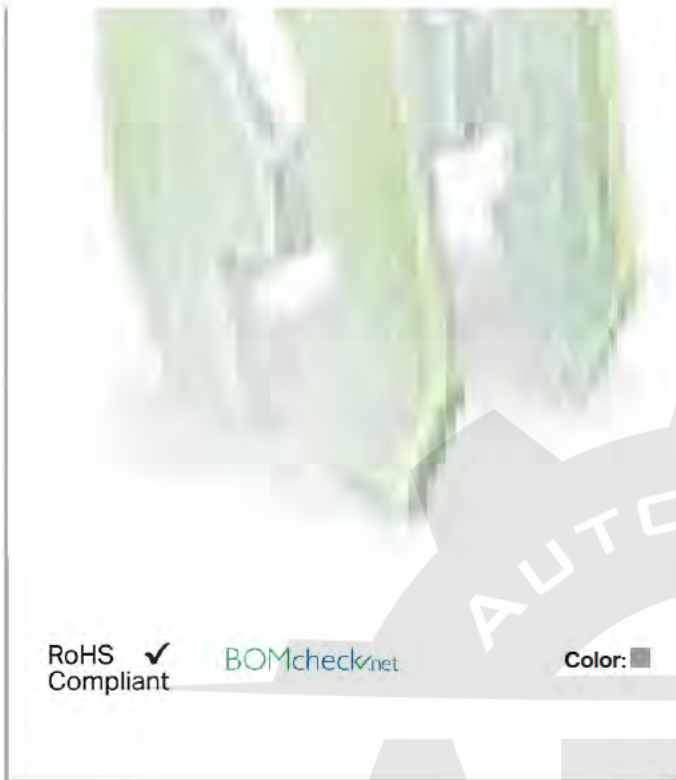

**Data****Electrical data****Ratings per IEC/EN 60664-1**

Rated voltage (III / 3)	400 V
Rated impulse voltage (III / 3)	6 kV
Rated current	32 A

Geometrical Data

Width	5.4 mm / 0.213 inch
Depth	6 mm / 0.236 inch

Material Data

Color	gray
Fire load	0.007 MJ
Weight	1.696 g

Commercial data

Product Group	17 (TOP JOB installation terminal blocks)
Country of origin	DE
GTIN	4044918270854

Customs Tariff No.

85366990990

Downloads**Documentation****Bid Text**

781-452	doc 24.6 kB	Download
---------	----------------	----------

Additional Information

Technical explanations

Apr 3, 2019

pdf
2.1 MBDownload

CAD/CAE - Smart Data**CAD data**

3D Download 781-452	URL	Download
---------------------	-----	----------

WSCAD

WSCAD Universe

Download

Subject to changes.
