


## Data sheet | Item number: 782-607

2-conductor ground terminal block; 6 mm<sup>2</sup>; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®; 6,00 mm<sup>2</sup>; green-yellow



782-607

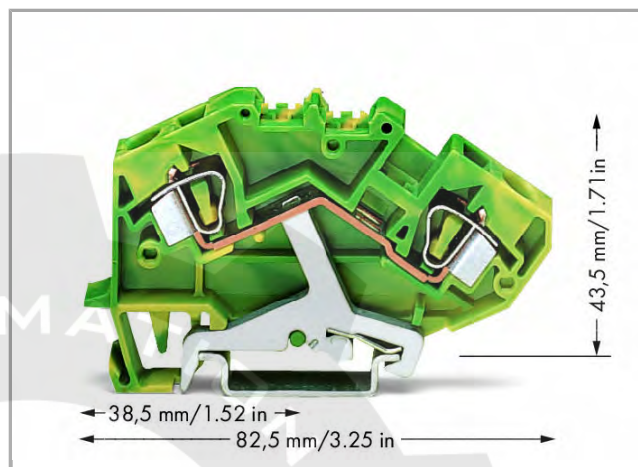

RoHS   
Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:



### Data

#### Connection data

|                                 |                |
|---------------------------------|----------------|
| Connection technology           | CAGE CLAMP®    |
| Actuation type                  | Open Tool Slot |
| Connectable conductor materials | Copper         |



|                                   |                    |                        |           |
|-----------------------------------|--------------------|------------------------|-----------|
| Solid conductor                   | 0.2                | 6 mm <sup>2</sup> / 24 | 10 AWG    |
| Fine-stranded conductor           | 0.2                | 6 mm <sup>2</sup> / 24 | 10 AWG    |
| Strip length                      | 12                 | 13 mm / 0.47           | 0.51 inch |
| Total number of connection points | 2                  |                        |           |
| Total number of potentials        | 1                  |                        |           |
| Number of levels                  | 1                  |                        |           |
| Type of wiring                    | Front-entry wiring |                        |           |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 8 mm / 0.315 inch    |
| Height from upper-edge of DIN-35 rail | 43.5 mm / 1.713 inch |
| Depth                                 | 82.5 mm / 3.248 inch |

## Mechanical data

|                  |                |
|------------------|----------------|
| Design           | angled         |
| Type of mounting | DIN-35 rail    |
| Marking level    | Center marking |

## Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | green-yellow         |
| Insulating material | Polyamide 66 (PA 66) |
| Weight              | 25.66 g              |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4045454084721 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Radio-Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2195540.01       |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7522      |
|                                                                                    | CSA                             | C22.2 No. 158            | 1833819          |



DEKRA Certification B.V.

#### Country specific Approvals

| Logo                                                                                | Approval                                  | Additional Approval Text | Certificate name         |
|-------------------------------------------------------------------------------------|-------------------------------------------|--------------------------|--------------------------|
|     | <b>ABS</b><br>American Bureau of Shipping | EN 60947                 | 14-<br>HG1293677-<br>PDA |
|    | <b>BV</b><br>Bureau Veritas S.A.          | EN 60947                 | 07436/E0<br>BV           |
|     | <b>CCA</b><br>DEKRA Certification B.V.    | EN 60947                 | 2195540.01               |
|    | <b>CCA</b><br>DEKRA Certification B.V.    | EN 60947                 | NTR NL-<br>7522          |
|   | <b>CSA</b><br>DEKRA Certification B.V.    | C22.2 No. 158            | 1833819                  |
|  | <b>LR</b><br>Lloyds Register              | EN 60947                 | 91/20112<br>(E9)         |

#### Ship Approvals

| Logo                                                                                | Approval                                                | Additional Approval Text | Certificate name         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | EN 60947                 | 14-<br>HG1293677-<br>PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | EN 60947                 | 07436/E0<br>BV           |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE0001V2                |



LR  
Lloyds Register

EN 60947

91/20112  
(E9)

#### Other Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|------------------|
|  | UR<br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |

#### UL-Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name    |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|---------------------|
|  | UR<br>Underwriters Laboratories Inc. | UL 1059                  | 20190731-<br>E45172 |

#### Compatible products

##### General accessories



Item no.: 249-105  
Group marker carrier

249-105

##### End plate



Item no.: 782-317  
End and intermediate plate; 1.5 mm thick; orange

782-317

##### check



Item no.: 209-170  
Test plug adapter; 8.3 mm wide; for 4 mm Ø test plugs; suitable for 1.5 mm<sup>2</sup> - 10 mm<sup>2</sup> tbs; gray

209-170

##### Carrier rail



Item no.: 210-112  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

210-112



Item no.: 210-113  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

210-113

|                                                                                    |                                                                                                                                        |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | 210-114 |
|    | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | 210-115 |
|    | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | 210-118 |
|    | <b>Item no.: 210-162</b><br>Steel carrier rail; 35 x 7.5 mm; slotted; 1 mm thick                                                       | 210-162 |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | 210-196 |
|    | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | 210-197 |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | 210-198 |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715          | 210-504 |
|    | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715        | 210-505 |
|   | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715         | 210-506 |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715           | 210-508 |
| <b>ferrule</b>                                                                     |                                                                                                                                        |         |
|  | <b>Item no.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated                          | 216-101 |
|  | <b>Item no.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated                         | 216-102 |
|  | <b>Item no.: 216-103</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated                            | 216-103 |
|  | <b>Item no.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated                          | 216-104 |
|  | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated                          | 216-106 |
|  | <b>Item no.: 216-107</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; uninsulated; electro-tin plated                            | 216-107 |
|  | <b>Item no.: 216-108</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; uninsulated; electro-tin plated                            | 216-108 |
|  | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated                          | 216-121 |
|                                                                                    | <b>Item no.: 216-122</b>                                                                                                               |         |

|                                                                                    |                                                                                                                                                                               |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                                                        | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                               | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                             | 216-124 |
|    | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-131 |
|    | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-132 |
|    | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92     | 216-141 |
|    | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-142 |
|    | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92       | 216-143 |
|    | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92     | 216-144 |
|   | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white                                                                        | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                        | 216-202 |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                            | 216-203 |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                        | 216-204 |
|  | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm² / AWG 14; insulated; electro-tin plated; yellow                                                                      | 216-205 |
|  | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue                                                                         | 216-206 |
|  | <b>Item no.: 216-207</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; gray                                                                           | 216-207 |
|  | <b>Item no.: 216-208</b><br>Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow | 216-208 |

|                                                                                   |                                                                                                                                                                                |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white                                                                         | 216-221 |
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                         | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                             | 216-223 |
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                         | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | 216-242 |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-243 |
|    | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-244 |
|    | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-246 |
|   | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | 216-262 |
|  | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-264 |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-266 |
|  | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray    | 216-267 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-284 |
|  | <b>Item no.: 216-286</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-286 |
|  | <b>Item no.: 216-287</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray    | 216-287 |
|  | <b>Item no.: 216-288</b><br>Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow  | 216-288 |

|                                                                                    |                                                                                                                                       |                      |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|                                                                                    | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow                  | 216-301              |
|    | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green                   | 216-302              |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow                  | 216-321              |
|    | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green                   | 216-322              |
| <b>tools</b>                                                                       |                                                                                                                                       |                      |
|    | <b>Item no.: 210-721</b><br>Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft                                     | 210-721              |
| <b>Jumper</b>                                                                      |                                                                                                                                       |                      |
|    | <b>Item no.: 282-402</b><br>Adjacent jumper; insulated; Nominal current 41 A; IN = IN terminal block; gray                            | 282-402              |
|    | <b>Item no.: 282-409</b><br>Alternate jumper; insulated; Nominal current 41 A; gray                                                   | 282-409              |
|    | <b>Item no.: 282-422</b><br>Adjacent jumper; insulated; Nominal current 41 A; yellow-green                                            | 282-422              |
|   | <b>Item no.: 282-424</b><br>Adjacent jumper; insulated; Nominal current 41 A; orange                                                  | 282-424              |
| <b>Marking accessories</b>                                                         |                                                                                                                                       |                      |
|  | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white               | 2009-115             |
|  | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | 2009-115<br>/000-002 |
|  | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | 2009-115<br>/000-006 |
|  | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | 2009-115<br>/000-007 |
|  | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | 2009-115<br>/000-012 |
|  | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; light green | 2009-115<br>/000-017 |
|  | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green       | 2009-115<br>/000-023 |

|                                                                                    |                                                                                                                                                           |                      |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet                          | 2009-115<br>/000-024 |
|    | <b>Item no.: 209-185</b><br>Adaptor                                                                                                                       | 209-185              |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                        | 793-501              |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-002  |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-005  |
|    | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-006  |
|    | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-007  |
|   | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-012  |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-017  |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-023  |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-024  |
|  | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white          | 793-5501             |
|  | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | 793-5501<br>/000-002 |
|  | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; red                                          | 793-5501<br>/000-005 |
|  | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; blue                                         | 793-5501<br>/000-006 |



Item no.: 793-5501/000-007

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; gray

/000-007

793-5501



Item no.: 793-5501/000-012

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; orange

/000-012

793-5501



Item no.: 793-5501/000-017

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; light green

/000-017

793-5501



Item no.: 793-5501/000-023

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; green

/000-023

793-5501



Item no.: 793-5501/000-024

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; violet

/000-024

793-5501

## assembling



Item no.: 209-106

Mounting carrier; for isolated mounting on DIN 35 rails; gray

209-106



Item no.: 709-154

Cover; Type 2; suitable for cover carrier, type 2; 1 m long; transparent

709-154

## protection



Item no.: 282-415

Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow

282-415

## Downloads

## Documentation

## Bid Text

782-607

Reihenklemmen, topJob

Apr 4, 2012

doc  
24.6 kB

Download

## Additional Information

Technical explanations

Apr 3, 2019

pdf  
2.1 MB

Download

## CAD/CAE - Smart Data

## CAD data

3D Download 782-607

URL

Download

## EPLAN

EPLAN Data Portal

Download

WSCAD

WSCAD Universe

[Download](#)

## Product family

**TOPJOB Classic**

[Show all products from the family](#)



Subject to changes.