


Data sheet | Item number: 787-1021

Switched-mode power supply; Compact; 1-phase; 12 VDC output voltage;
6.5 A output current




787-1021

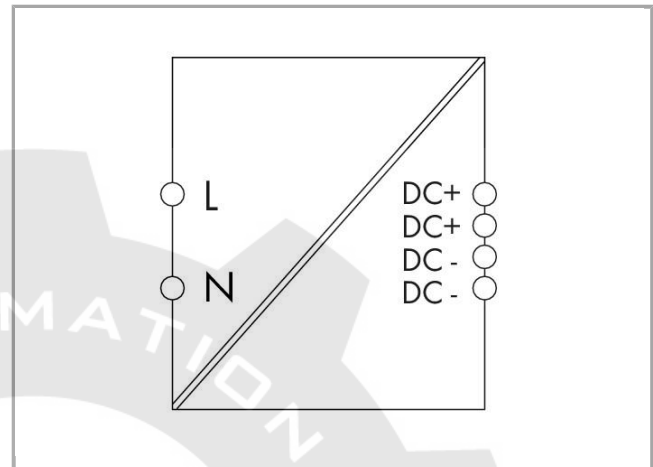

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

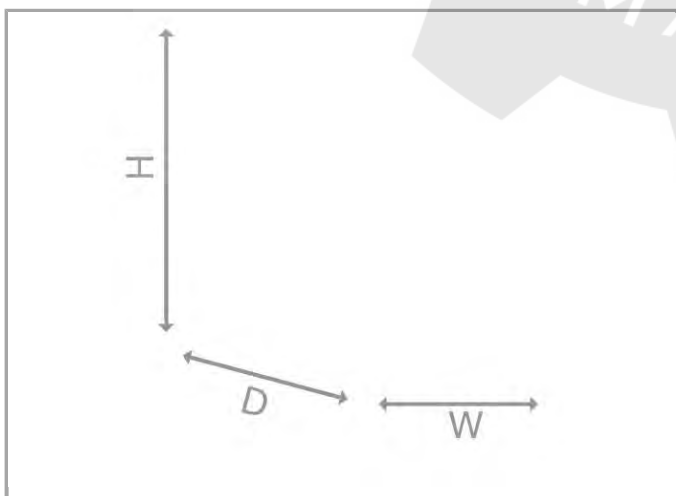

Item description

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Stepped profile, ideal for distribution boards or distribution boxes
- Overhead mounting is possible with derating
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204

Data

Technical Data

Input

Phases	1
Nominal input voltage $U_{i\text{nom}}$	AC 100 ... 240 V
Input voltage range	AC 85 ... 264 V; DC 120 ... 373 V
Input voltage derating	$I_o \leq 6\text{ A}$ (< 100 VAC); $I_o \leq 5.5\text{ A}$ (< 90 VAC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	$\leq 0.9\text{ A}$ (230 VAC); $\leq 1.6\text{ A}$ (110 VAC)
Discharge current	$\leq 1\text{ mA}$
Inrush current	$\leq 30\text{ A}$ (NTC)
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 100\text{ ms}$ (230 VAC); $\geq 15\text{ ms}$ (110 VAC)

Output

Nominal output voltage $U_{o\text{nom}}$	DC 12 V (SELV)
Output voltage range	DC 10.5 ... 15.5 V (adjustable)
Factory preset	DC 12 V
Nominal output current $I_{o\text{nom}}$	6.5 A (12 VDC); 3.9 A (12 VDC; in any mounting position)
Nominal output power	78 W
Adjustment accuracy	$\leq 2\%$
Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak)
Current limitation	$1.1 \times I_{o\text{nom}}$ typ.
Overload behavior	Constant current

Signaling and communication

Signaling	1 x LED operation status indicator (green)
-----------	--

Operation status indicator

LED green (U_o)

Efficiency/Power losses:

Power loss P_v	≤ 1 W (230 VAC; no load); ≤ 15 W (230 VAC; nominal load)
Max. power loss $P_{v \max.}$	15 W (100 VAC / 12 VDC; 6.5 A)
Efficiency	87 %

Fuse protection:

Internal fuse	T 4 A / 250 VAC
External fuse (required)	an external DC fuse required for DC input voltage
External fuse (recommended)	Circuit breakers 6 A (characteristic: C), 10 A (characteristic: B) or higher

Safety and protection:

Insulation voltage (PRI-SEC)	4.242 kV DC
Protection class	II
Protection class	IP20 (per EN 60529)
Feedback voltage	$\leq$ DC 25 V
Overvoltage category	II
Transient protection, primary	Varistor
Overvoltage protection, secondary	≤ 30 VDC (in case of an error)
Short circuit protection	Yes
No-load proof	Yes
Parallel operation	Yes
Series connection	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type (1)	Input/Output
Connection technology	CAGE CLAMP®
WAGO terminal	WAGO 740 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inch

Geometrical Data

Width	90 mm / 3.543 inch
Height	89 mm / 3.504 inch
Depth	59 mm / 2.323 inch

Length from upper-edge of DIN-35 rail	55 mm / 2.165 inch
---------------------------------------	--------------------

Mechanical data

Type of mounting	DIN-35 rail (EN 60715)
------------------	------------------------

Material Data

Flammability class per UL94	V0
Weight	300 g

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 60 °C (Device start at -40 °C type-tested)
Surrounding air (storage) temperature	-25 ... 80 °C
Surrounding air (operating) temperature for UL	-25 ... 55 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-3 %/K (> 45 °C)
Pollution degree	2
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	1
Standards/specifications	EN 60950-1; EN 61204-3; UL 60950-1; UL 508; DNV GL

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4050821498018
Customs Tariff No.	85044082900

Approvals / Certificates

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAA00000KT

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 508	E255817



Underwriters Laboratories Inc.



UL
 Underwriters Laboratories Inc.

UL 60950-1

E255815

Compatible products

tools



Item no.: 210-720
 Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720



Item no.: 210-769
 SCREWDRIVER

210-769

Marking accessories



Item no.: 210-831
 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive

210-831



Item no.: 210-832
 Marking strips; on reel; 3 mm wide; plain; Self-adhesive

210-832

ferrule



Item no.: 216-201
 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated

216-201



Item no.: 216-202
 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated

216-202



Item no.: 216-203
 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated

216-203



Item no.: 216-221
 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated

216-221



Item no.: 216-222
 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated

216-222



Item no.: 216-223
 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated

216-223



Item no.: 216-241
 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-241



Item no.: 216-242
 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-242

Item no.: 216-243

	Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	216-243
	Item no.: 216-262 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	216-262
	Item no.: 216-263 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	216-263
	Item no.: 216-301 Ferrule; Sleeve for 0.25 mm ² / AWG 24; insulated; electro-tin plated	216-301
	Item no.: 216-302 Ferrule; Sleeve for 0.34 mm ² / 22 AWG; insulated; electro-tin plated	216-302
	Item no.: 216-321 Ferrule; Sleeve for 0.25 mm ² / AWG 24; insulated; electro-tin plated	216-321
	Item no.: 216-322 Ferrule; Sleeve for 0.34 mm ² / 22 AWG; insulated; electro-tin plated	216-322

Downloads

Documentation

Bid Text

787-1021	Dec 9, 2013	doc 32.8 kB	Download
Interface Modules			

Instruction Leaflet

Primary Switch Mode Power Supply EPSITRON COMPACT Power 12 VDC, 6.5 A		pdf 621.3 kB	Download
--	--	-----------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 787-1021	URL	Download
----------------------	-----	----------

Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

[Show all products from the family](#)



Subject to changes.
