


Data sheet | Item number: 787-1226

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 6 A output current




787-1226

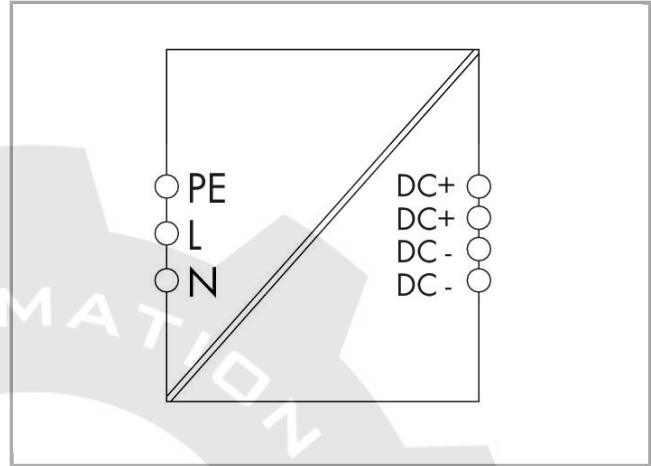

RoHS
Compliant

[BOMcheck.net](https://www.bomcheck.net)

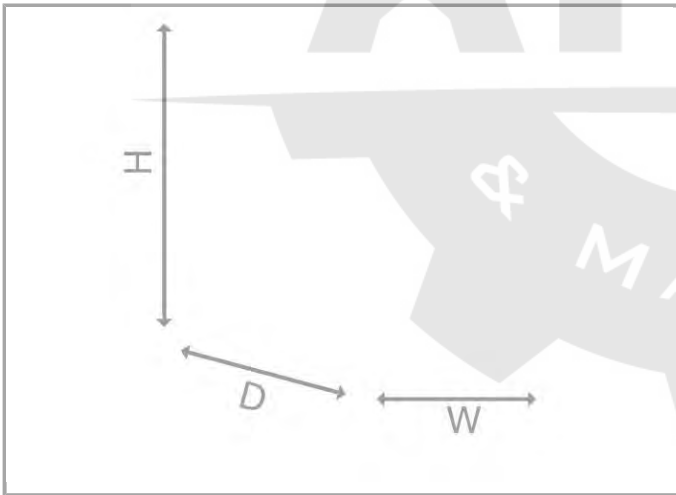

Item description

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Screw mounts provide an ideal installation alternative in distribution boxes or devices
- Pluggable *picoMAX*® connection technology (tool-free)

- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204

Data

Technical Data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	AC 100 ... 120 V; AC 200 ... 240 V
Input voltage range	AC 90 ... 132 V; AC 180 ... 264 V; DC 250 ... 375 V
Input voltage derating	-2 %/V (< 100 VAC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	$\leq 3.8\text{ A}$
Discharge current	$\leq 0.25\text{ mA}$
Inrush current	$\leq 20\text{ A}$
Power factor	≥ 0.5
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 30\text{ ms}$

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Factory preset	DC 24 V
Nominal output current $I_{o\text{ nom}}$	6 A; 4.8 A (< 110 VAC)
Nominal output power	150 W
Adjustment accuracy	$\leq 1\%$
Deviation, dynamic load change 10 ... 90 %	$\leq 1\%$
Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.35 \times I_{o\text{ nom}}$); shutdown and automatic restart in the event of a short circuit or permanent overload

Signaling and communication

Signaling	1 x LED DC OK (green)
Operation status indicator	LED green (U_o)

Efficiency/Power losses:

Power loss P_v	$\leq 0.4\text{ W}$ (230 VAC; no load)
------------------	--



Max. power loss $P_{v \max}$	16.5 W (100 VAC / 24 VDC; 6 A)
Efficiency	90 % (230 VAC); 89 % (110 VAC)

Fuse protection:

Internal fuse	T 3.15 A / 500 VAC
External fuse (required)	an external DC fuse required for DC input voltage
External fuse (recommended)	Circuit breakers 6 A (characteristic: C), 10 A (characteristic: B) or higher

Safety and protection:

Insulation voltage (PRI-SEC)	4.242 kV DC
Protection class	I
Protection class	IP20 (per EN 60529)
Feedback voltage	$\leq$ DC 35 V
Transient protection, primary	Varistor
Overvoltage protection, secondary	$\leq$ 31 VDC (in case of an error)
Short circuit protection	Yes
No-load proof	Yes
Parallel operation	Yes
Series connection	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type (1)	Input/Output
Connection technology	Push-in CAGE CLAMP®
WAGO terminal	picoMAX® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

Geometrical Data

Width	144 mm / 5.669 inch
Height	90 mm / 3.543 inch
Depth	56 mm / 2.205 inch
Length from upper-edge of DIN-35 rail	52.5 mm / 2.067 inch
Note on dimensions	L=48 mm with front panel

Mechanical data

Type of mounting	DIN-35 rail (EN 60715)
------------------	------------------------

Screw mounting (back/side)

Material Data

Flammability class per UL94	V0
Weight	510 g

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
Surrounding air (storage) temperature	-40 ... 85 °C
Relative humidity	≤ 95% (no condensation permissible)
Derating	-2.66 %/K (> 55 °C)
Pollution degree	2
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	1
Standards/specifications	EN 61204-3; EN 60335-1; EN 60950-1; UL 60950; UL 508

Commercial data

Country of origin	CN
GTIN	4055143415040
Customs Tariff No.	85044082900

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Compatible products

tools

	Item no.: 210-720 Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm	210-720
	Item no.: 210-769 SCREWDRIVER	210-769



Strain relief plate



Item no.: 2092-1601

Gripping plate

2092-1601

ferrule



Item no.: 216-201

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated

216-201



Item no.: 216-202

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated

216-202



Item no.: 216-203

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated

216-203



Item no.: 216-204

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated

216-204

Item no.: 216-301

Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated

216-301



Item no.: 216-302

Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated

216-302

Downloads

Documentation

Manual

COMPACT Power
DC Power Supply

V 1.0.0

pdf
2.6 MB

Download

Bid Text

787-1226

doc
37.4 kB

Download

Instruction Leaflet

EPSITRON COMPACT Switched-Mode Power Supply
24 VDC, 6 Apdf
1.6 MB

Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

Download

CAD/CAE - Smart Data

CAD data

Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

Show all products from the family



Subject to changes.