


Data sheet | Item number: 787-622

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; 2,50 mm²




787-622

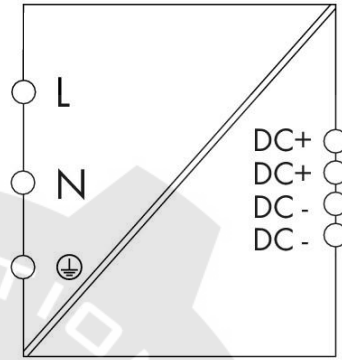

RoHS
Compliant ✓

[BOMcheck.net](https://www.bomcheck.net)

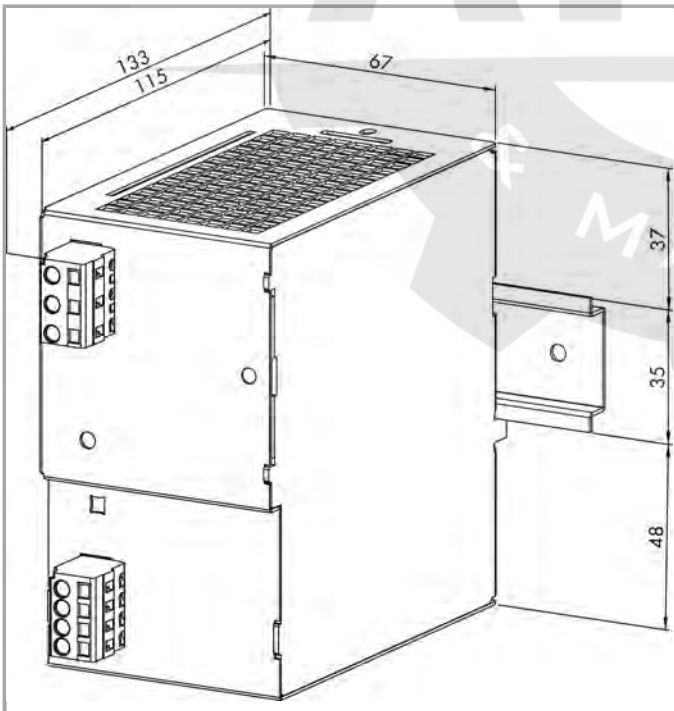

Item description

- Primary switch mode power supply unit
- Prepared for protection class I equipment
- Parallel operation, series connection possible
- Natural convection cooling when horizontally mounted
- Enclosed for use in switchgear cabinets
- Electrically isolated output voltage (SELV) acc. to EN 60950-1/UL 60950

Data

Technical Data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	AC 100 240 V; DC 140 300 V
Input voltage range	AC 90 264 V; DC 130 300 V
Nominal mains frequency range	50 60 Hz; 0 Hz
Input current I_i	≤ 0.85 A (230 VAC)
Discharge current	≤ 0.55 mA
Inrush current	≤ 30 A
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 20 ms (230 VAC)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 28.8 V (adjustable)
Factory preset	DC 24 V
Nominal output current $I_{o\text{ nom}}$	5 A (24 VDC)
Adjustment accuracy	≤ 2 %
Residual ripple	≤ 100 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o\text{ nom}}$ typ.
Overload behavior	Constant current

Signaling and communication

Operation status indicator	LED green (24 V OK)
----------------------------	---------------------

Efficiency/Power losses:

Power loss P_v	≤ 10 W (230 VAC; no load)
Max. power loss $P_{v\text{ max.}}$	13 W (90 VAC / 24 VDC; 5 A)



Efficiency (typ.)	90 %
-------------------	------

Fuse protection:

Internal fuse	T 4 A / 250 VAC
External fuse (required)	an external DC fuse required for DC input voltage
External fuse (recommended)	Circuit breakers C10 or B10

Safety and protection:

Insulation voltage (PRI-SEC)	DC 4.242 kV
Isolation voltage (PRI-GND)	DC 2.2 kV
Insulation voltage (SEC-GND)	DC 0.7 kV
Protection class	I
Protection class	IP20 (per EN 60529)
Feedback voltage	≤ DC 30 V
Transient protection, primary	Varistor
Overvoltage protection, secondary	Internal protective circuit ≤ 40 VDC (in case of an error)
Short circuit protection	Yes
No-load proof	Yes
Parallel operation	Yes
Series connection	Yes

Connection data

Connection type (1)	Input/Output
Connection technology	CAGE CLAMP®
WAGO terminal	WAGO 231 Series
Solid conductor	0.08 2.5 mm² / 28 12 AWG
Fine-stranded conductor	0.08 2.5 mm² / 28 12 AWG
Strip length	8 9 mm / 0.31 0.35 inch
Note (conductor cross-section)	12 AWG: THHN, THWN

Geometrical Data

Width	67 mm / 2.638 inch
Height from upper-edge of DIN-35 rail	133 mm / 5.236 inch
Length from upper-edge of DIN-35 rail	120 mm / 4.724 inch

Mechanical data

Type of mounting	DIN-35 rail (EN 60715)
------------------	------------------------

Material Data

Fire load	4.8 MJ
Weight	790 g

Environmental Requirements

Surrounding air (operating) temperature	-10 70 °C
Surrounding air (storage) temperature	-25 85 °C
Relative humidity	30 85 % (no condensation permissible)
Derating	-3 %/K (> 50 °C)
Pollution degree	2
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 60950-1; EN 61204-3; UL 60950; UL 508; GL

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454435349
Customs Tariff No.	85044082900

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815
	UL Underwriters Laboratories Inc.	UL 508	E255817

Downloads

Documentation

Bid Text

787-622



Netzgerät

Apr 4, 2012

docx
21.1 kB[Download](#)**Instruction Leaflet**Primär getaktete Stromversorgungen EPSITRON-CLASSIC-Power
DC 24 V, 5 Apdf
246.0 kB[Download](#)**Additional Information**

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB[Download](#)**CAD/CAE - Smart Data****CAD data**

3D Download 787-622

URL

[Download](#)**EPLAN**

EPLAN Data Portal

[Download](#)**WSCAD**

WSCAD Universe

[Download](#)

Subject to changes.