





787-890

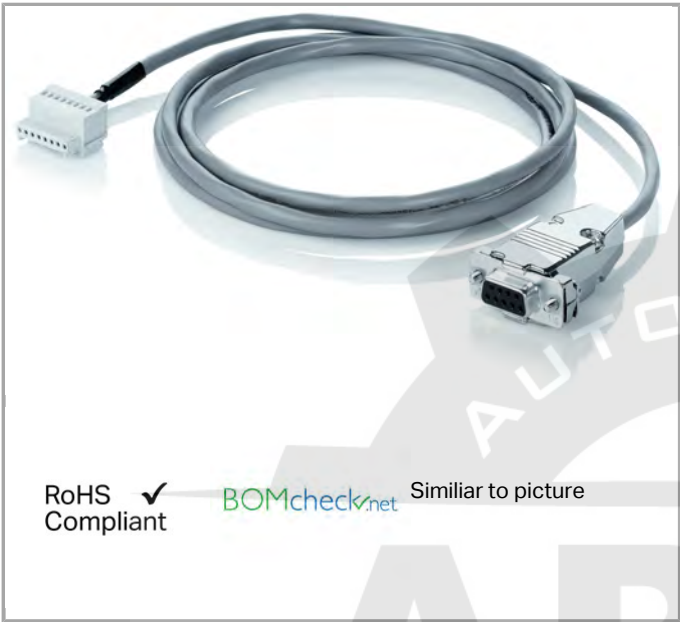

RoHS
Compliant

BOMcheck.net

Similar to picture

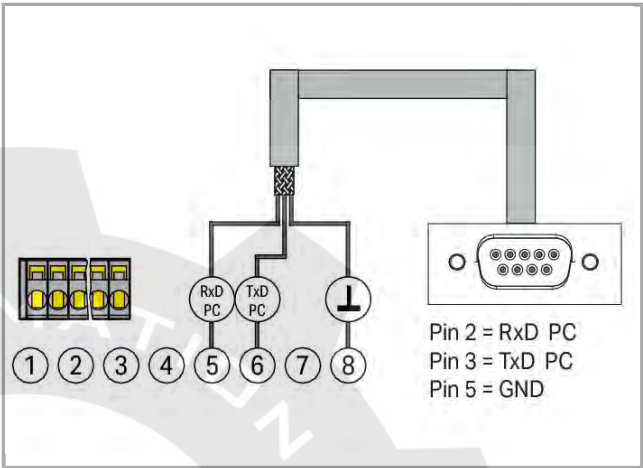

Item description

The communication cable is used for configuration and visualization via PC or controller.

The communication cable is suitable for all 787-8xx Series devices equipped with an RS-232 serial interface.

Download the corresponding PC software for all 787 Series devices at www.wago.com.

Function blocks for communication with the WAGO-I/O-SYSTEM 750 and other control systems are also available.

Note:

The communication cables is not electrically isolated.

Data
Technical Data

Signaling and communication

Signaling	1 x RS-232 cable
Communication	RS-232 serial interface

Safety and protection:

Protection class	IP20 (per EN 60529)
------------------	---------------------

Connection data

Connection type (1)	Module side (787-8xx)
Connection technology	1 x 8-pole female connector (733-108) with strain relief
Connection type (2)	PC/controller side
Connection technology 2	1 x 9-pole D-sub female connector
Type of cable	3 x 0.34 mm ² , shielded

Geometrical Data

Cable length	1.8 m
--------------	-------

Material Data

Weight	113 g
--------	-------

Environmental Requirements

Surrounding air (operating) temperature	-10 ... 70 °C
---	---------------

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454909741
Customs Tariff No.	85444290900

Compatible products

General accessories



Item no.: 761-9005
USB adapter; with 1 m connection cable

761-9005

Downloads

Documentation

Bid Text

787-890	Apr 4, 2012	doc	Download
Stromversorgung EPSITRON		25.6 kB	

Additional Information

