




788-121

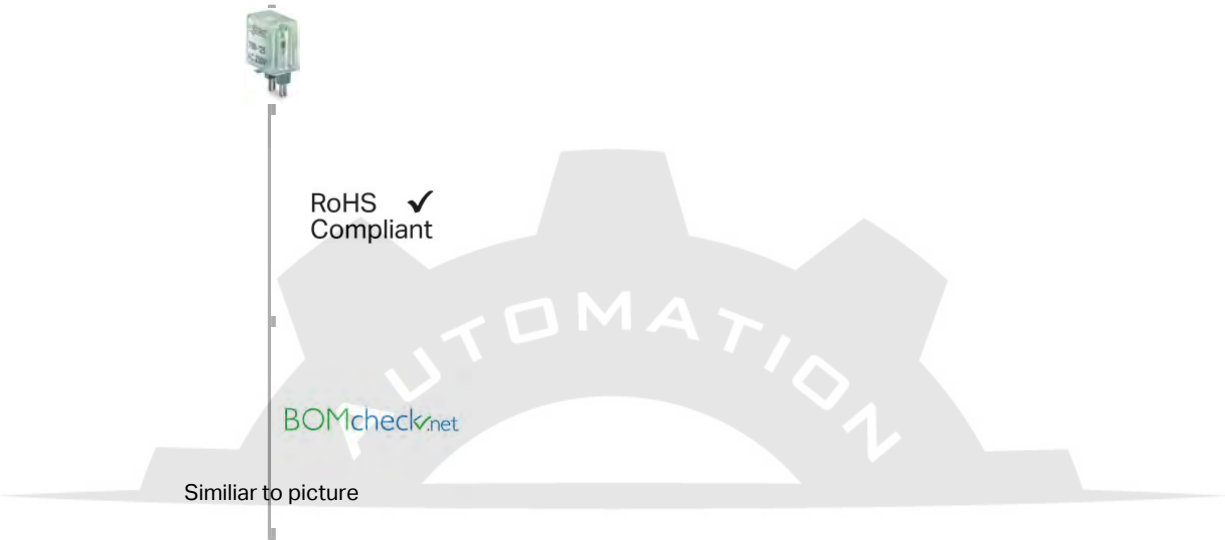

Item description

Note:

Only required when using relays without integrated operating indicator!

Data
Technical Data

Operating data

Nominal operating voltage	DC 48 V
Operating voltage	DC 48 ... 60 V
Power consumption at U _N	1.9 mA

Signaling

Status indication	LED red
-------------------	---------

Safety and protection:

Protection class	IP20
------------------	------



Mechanical data

Type of mounting	Pluggable module
------------------	------------------

Material Data

Fire load	0 MJ
Weight	1.7 g

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454550349
Customs Tariff No.	85318070000

Downloads

Documentation

Bid Text

788-121	Apr 4, 2012	doc	Download
Zubehör Serie 788		22.5 kB	

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	Download
		265.8 kB	

CAD/CAE - Smart Data

CAD data

3D Download 788-121	URL	Download
---------------------	-----	----------

Subject to changes.