


788-122

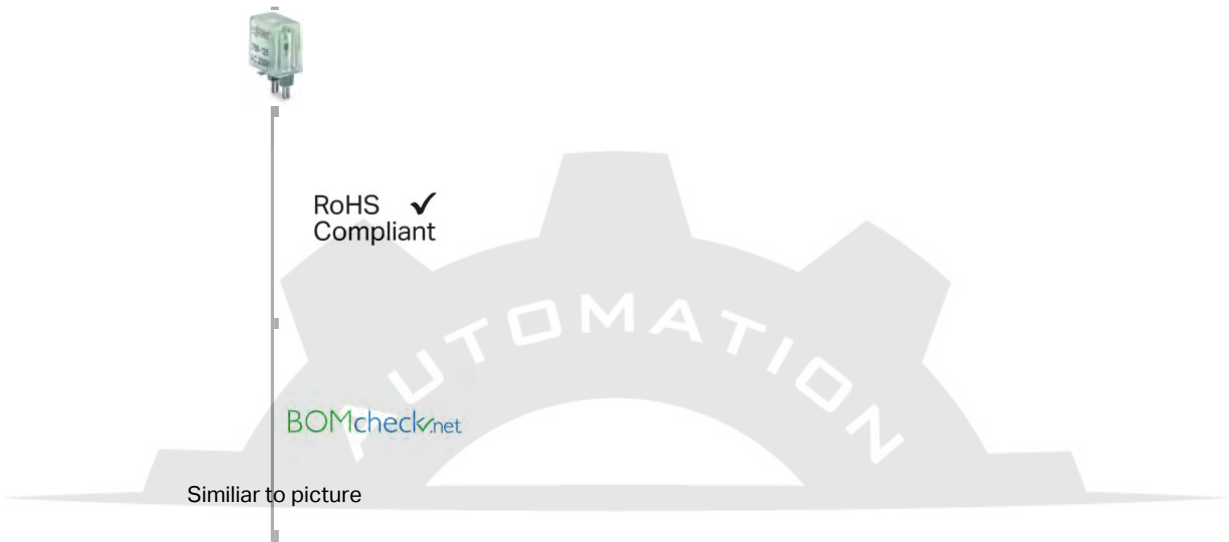

Item description

Note:

Only required when using relays without integrated operating indicator!

Data
Technical Data

Control circuit

Nominal input current at U_N	0
--------------------------------	---

Load circuit:

Min. switching current	0 μ A
Drop-out time	≤ 0 μ s

Operating data

Nominal operating voltage	DC 110 V
Power consumption at U_N	1.9 mA

Signaling

Status indication	LED red
-------------------	---------

Safety and protection:

Protection class	IP20
------------------	------

Mechanical data

Type of mounting	Pluggable module
------------------	------------------

Material Data

Fire load	0MJ
Weight	1.502 g

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454520656
Customs Tariff No.	85318070000

Downloads

Documentation

Bid Text

788-122 Zubehör Serie 788	Apr 4, 2012	doc 22.5 kB	Download
------------------------------	-------------	----------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 788-122	URL	Download
---------------------	-----	----------



Subject to changes.
