


Data sheet | Item number: 789-127

PCB terminal block; 2.5 mm²; Pin spacing 5 mm; 3-pole; CAGE CLAMP®



789-127



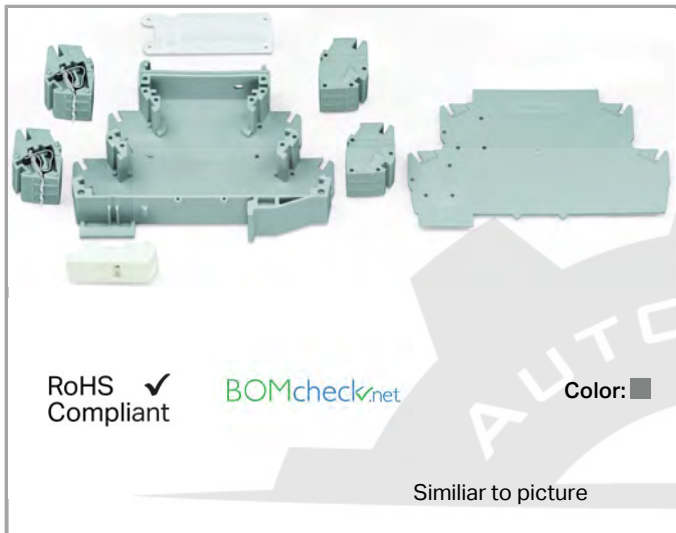


RoHS
Compliant

BOMcheck.net

Color: ■

Similar to picture

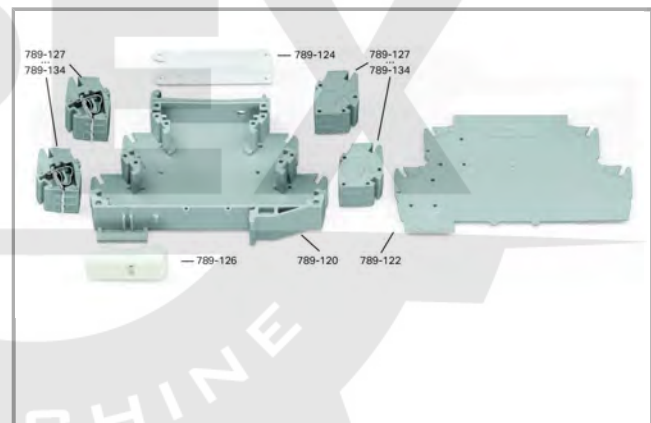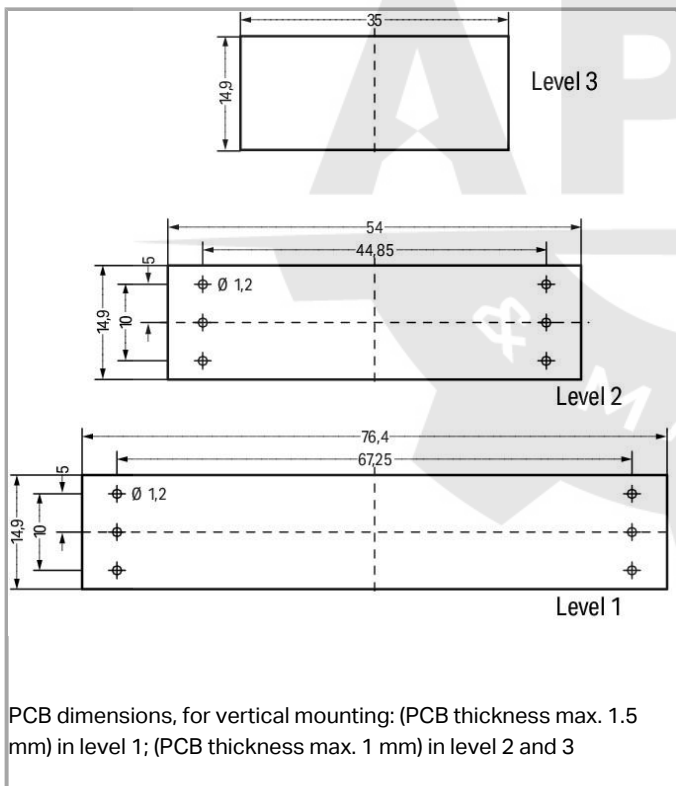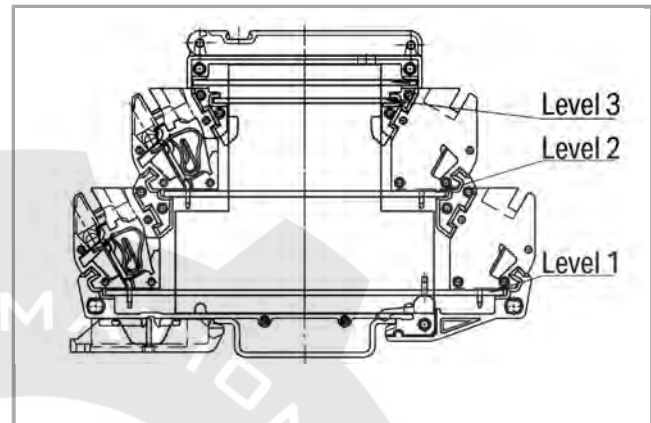

Item description

Universal modular component housing, as DIN-rail-mount enclosure – terminal block, 3-pole: CCC*

(*C = with clamping spring; O = without clamping spring; enclosure open on the right side)

Data

Connection data

No. of poles	3
Connections (number)	3

Mechanical data

Housing design	DIN-rail-mount enclosure
Suitable	For 789-120

Material Data

Color	gray
Fire load	0.072 MJ
Weight	4.275 g

Commercial data

Country of origin	DE
GTIN	4044918610537
Customs Tariff No.	85369010000

Compatible products

General accessories



Item no.: 789-120
Housing 55 mm

789-120

ferrule



Item no.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-241



Item no.: 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-242



Item no.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-243



Item no.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-244




Downloads
Documentation
Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 789-127	URL	Download
---------------------	-----	----------

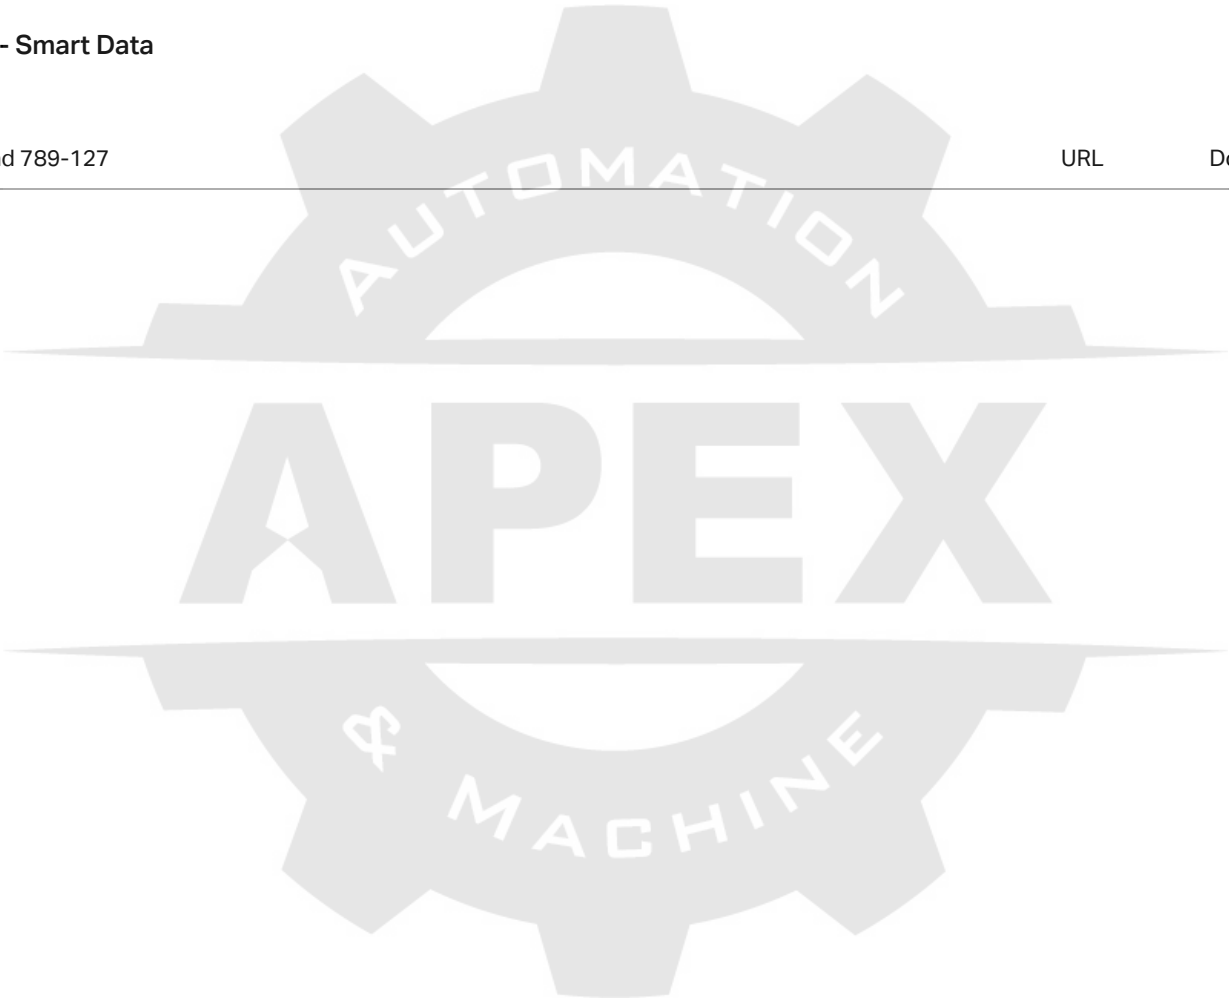

Subject to changes.