

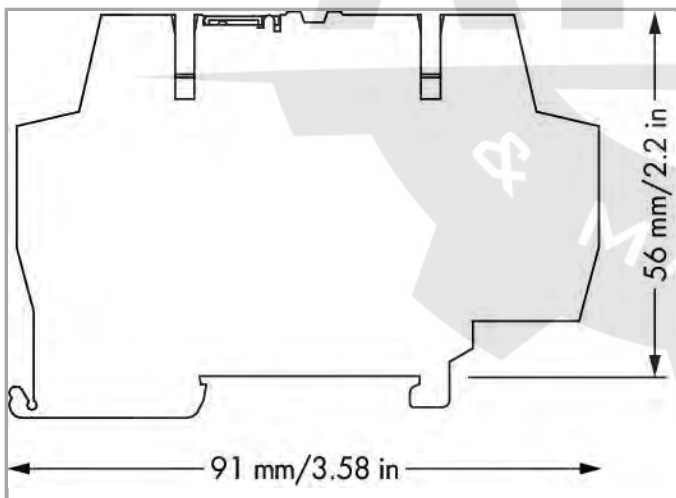


Data sheet | Item number: 792-805

Surge suppression module for signal technology; Nominal voltage: 5 VDC;
for 2 signal paths with common surge arrester; for interfaces with high baud
rate; Two-stage; Width: 6 mm; 2,50 mm²

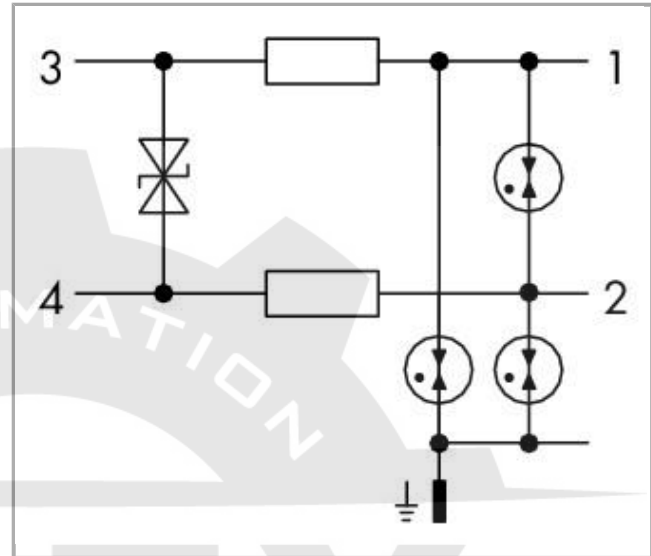

792-805

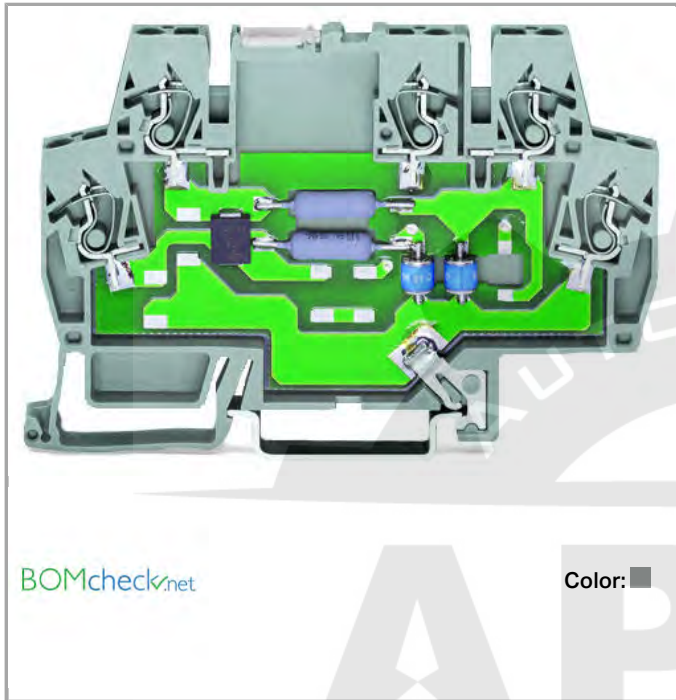

Item description

Short description:

Surge protection devices for IT systems and devices in the voltage range up to 60 V (except special solutions, e.g., telephone systems with call voltage).

Overvoltage protection is also possible for DIN-35 rail-mount terminal blocks. Multi-stage surge suppression devices in rail-mount terminal blocks (792-80x Series) of just 6 mm width ensure cost-effective protection for control and bus technology (e.g. LON[®] network, PROFIBUS network, binary signals).

Features:

- Protect your system against overvoltage
- Slim, space-saving design
- Control operational costs by preventing expensive, unplanned downtime
- High operational reliability and system uptime

Note:

The coordination characteristics give information about the let-through energy of the overvoltage protector and the protection capacity.

Data

Electrical data

Nominal operating voltage	DC 5 V
Maximum continuous operating voltage	AC 4.2 V / DC 6 V
Nominal current	0.1 A
Nominal discharge current (8/20 µs) per line	5 kA
Nominal discharge current (8/20 µs) in total	10 kA
Voltage protection level line/line (cat. C2 at I_N)	≤ 27 V
Voltage protection level line/PG (cat. C2 at I_N)	≤ 50 V
Voltage protection level line/line (cat. C3 at I_N)	≤ 14 V
Voltage protection level line/PG (cat. C3 at I_N)	≤ 14 V
Response time line/line	≤ 1 ns
Limit frequency line/line	250 MHz
Limiting frequency Ader/PG	180 MHz
Impedance	1 Ω
Capacity line/line	≤ 19 pF
Capacity line/PG	≤ 16 pF

Safety and protection:

Protection class	IP00
Degree of protection with end and intermediate plate	IP20

Connection data

Connections (number)	5
Connection technology	

	CAGE CLAMP®
Solid conductor	0.08 2.5 mm ² / 28 14 AWG
Fine-stranded conductor	0.08 2.5 mm ² / 28 14 AWG
Strip length	5 6 mm / 0.2 0.24 inch

Geometrical Data

Width	6 mm / 0.236 inch
Height from upper-edge of DIN-35 rail	56 mm / 2.205 inch
Depth	91 mm / 3.583 inch

Mechanical data

Type of mounting	DIN-35 rail
------------------	-------------

Material Data

Color	gray
Weight	38 g

Environmental Requirements

Surrounding air (operating) temperature	-40 80 °C
Surrounding air (storage) temperature	-40 80 °C

Standards and specifications

Standards/specifications	IEC 61131-3
--------------------------	-------------

Commercial data

Product Group	21 (Special Products Electronic)
Country of origin	DE
GTIN	4017332843737
Customs Tariff No.	85363010900

Compatible products

tools



Item no.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft

210-720

Jumper

Item no.: 859-402



Push-in type jumper bar; 2-way; Nominal current 18 A; insulated; light gray

859-402

**Item no.: 859-402/000-005**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated; red

/000-005

859-402

**Item no.: 859-402/000-006**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated; blue

/000-006

859-402

**Item no.: 859-402/000-029**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated; yellow

/000-029

859-402

**Item no.: 859-403**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated; light gray

859-403

**Item no.: 859-403/000-005**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated; red

/000-005

859-403

**Item no.: 859-403/000-006**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated; blue

/000-006

859-403

**Item no.: 859-403/000-029**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated; yellow

/000-029

859-403

**Item no.: 859-404**

Push-in type jumper bar; 4-way; Nominal current 18 A; insulated; light gray

859-404

**Item no.: 859-404/000-005**

Push-in type jumper bar; 4-way; Nominal current 18 A; insulated; red

/000-005

859-404

**Item no.: 859-404/000-006**

Push-in type jumper bar; 4-way; Nominal current 18 A; insulated; blue

/000-006

859-404

**Item no.: 859-404/000-029**

Push-in type jumper bar; 4-way; Nominal current 18 A; insulated; yellow

/000-029

859-404

**Item no.: 859-405**

Push-in type jumper bar; 5-way; Nominal current 18 A; insulated; light gray

859-405

**Item no.: 859-405/000-005**

Push-in type jumper bar; 5-way; Nominal current 18 A; insulated; red

/000-005

859-405

**Item no.: 859-405/000-006**

Push-in type jumper bar; 5-way; Nominal current 18 A; insulated; blue

/000-006

859-405

**Item no.: 859-405/000-029**

Push-in type jumper bar; 5-way; Nominal current 18 A; insulated; yellow

/000-029

859-405

	Item no.: 859-406 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated; light gray	859-406
	Item no.: 859-406/000-005 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated; red	859-406 /000-005
	Item no.: 859-406/000-006 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated; blue	859-406 /000-006
	Item no.: 859-406/000-029 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated; yellow	859-406 /000-029
	Item no.: 859-407 Push-in type jumper bar; 7-way; Nominal current 18 A; insulated; light gray	859-407
	Item no.: 859-407/000-005 Push-in type jumper bar; 7-way; Nominal current 18 A; insulated; red	859-407 /000-005
	Item no.: 859-407/000-006 Push-in type jumper bar; 7-way; Nominal current 18 A; insulated; blue	859-407 /000-006
	Item no.: 859-407/000-029 Push-in type jumper bar; 7-way; Nominal current 18 A; insulated; yellow	859-407 /000-029
	Item no.: 859-408 Push-in type jumper bar; 8-way; Nominal current 18 A; insulated; light gray	859-408
	Item no.: 859-408/000-005 Push-in type jumper bar; 8-way; Nominal current 18 A; insulated; red	859-408 /000-005
	Item no.: 859-408/000-006 Push-in type jumper bar; 8-way; Nominal current 18 A; insulated; blue	859-408 /000-006
	Item no.: 859-408/000-029 Push-in type jumper bar; 8-way; Nominal current 18 A; insulated; yellow	859-408 /000-029
	Item no.: 859-409 Push-in type jumper bar; 9-way; Nominal current 18 A; insulated; light gray	859-409
	Item no.: 859-409/000-005 Push-in type jumper bar; 9-way; Nominal current 18 A; insulated; red	859-409 /000-005
	Item no.: 859-409/000-006 Push-in type jumper bar; 9-way; Nominal current 18 A; insulated; blue	859-409 /000-006

	Item no.: 859-409/000-029 Push-in type jumper bar; 9-way; Nominal current 18 A; insulated; yellow	859-409
		7000-029
	Item no.: 859-410 Push-in type jumper bar; 10-way; Nominal current 18 A; insulated; light gray	859-410
	Item no.: 859-410/000-005 Push-in type jumper bar; 10-way; Nominal current 18 A; insulated; red	859-410
		7000-005
	Item no.: 859-410/000-006 Push-in type jumper bar; 10-way; Nominal current 18 A; insulated; blue	859-410
		7000-006
	Item no.: 859-410/000-029 Push-in type jumper bar; 10-way; Nominal current 18 A; insulated; yellow	859-410
		7000-029
Marking accessories		
	Item no.: 2009-145 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white	2009-145
	Item no.: 2009-145/000-002 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	2009-145
		7000-002
	Item no.: 2009-145/000-005 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; red	2009-145
		7000-005
	Item no.: 2009-145/000-006 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue	2009-145
		7000-006
	Item no.: 2009-145/000-007 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray	2009-145
		7000-007
	Item no.: 2009-145/000-012 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange	2009-145
		7000-012
	Item no.: 2009-145/000-023 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green	2009-145
		7000-023
	Item no.: 2009-145/000-024 Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet	2009-145
		7000-024
	Item no.: 210-110 Fiber-tip pen	210-110
	Item no.: 248-450 Mini-WSB marking card; as card; MARKED; K1 - K10 (10x); not stretchable; Horizontal marking; snap-on type; white	248-450
	Item no.: 248-451	

	Mini-WSB marking card; as card; MARKED; K11 - K20 (10x); not stretchable; Horizontal marking; snap-on type; white		248-451
	Item no.: 248-452 Mini-WSB marking card; as card; MARKED; K (100x); not stretchable; Horizontal marking; snap-on type; white		248-452
	Item no.: 248-453 Mini-WSB marking card; as card; MARKED; U1, ... U10 (10x); not stretchable; Horizontal marking; snap-on type; white		248-453
	Item no.: 248-454 Mini-WSB marking card; as card; MARKED; U11 - U20 (10x); not stretchable; Horizontal marking; snap-on type; white		248-454
	Item no.: 248-455 Mini-WSB marking card; as card; MARKED; U 100 (10x); not stretchable; Horizontal marking; snap-on type; white		248-455
	Item no.: 248-501 Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card		248-501
	Item no.: 248-501/000-002 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow	/000-002	248-501
	Item no.: 248-501/000-005 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-005	248-501
	Item no.: 248-501/000-006 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-006	248-501
	Item no.: 248-501/000-007 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-007	248-501
	Item no.: 248-501/000-012 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-012	248-501
	Item no.: 248-501/000-017 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-017	248-501
	Item no.: 248-501/000-023 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-023	248-501
	Item no.: 248-501/000-024 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	/000-024	248-501
	Item no.: 248-502/000-024 Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white	/000-024	248-502
	Item no.: 248-503/000-024 Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white	/000-024	248-503

	Item no.: 248-504 Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	248-504
	Item no.: 248-504/000-024 Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	248-504 /000-024
	Item no.: 248-505/000-024 Mini-WSB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; violet	248-505 /000-024
	Item no.: 248-566 Mini-WSB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white	248-566
End plate		
	Item no.: 859-525 End and intermediate plate; 1 mm thick; gray	859-525

Downloads

Documentation

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE - Smart Data

EPLAN

EPLAN Data Portal	Download
-------------------	----------

WSCAD

WSCAD Universe	Download
----------------	----------

Subject to changes.