


Data sheet | Item number: 852-1605

Industrial managed switch; 8 - 10/100/1000 Mb/s RJ45 ports; 4 - 1000 Mb/s Fiber Optic ports; Extended temperature range

www.wago.com/852-1605



Color: —

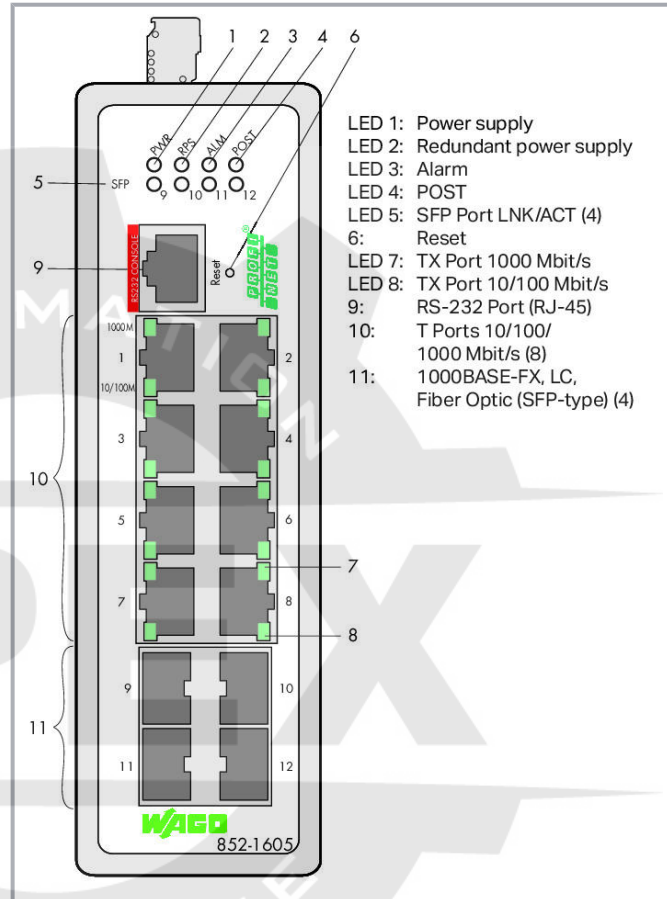

Item description

The 852-1605 Industrial Managed Switch is a configurable ETHERNET switch equipped with eight 10/100/1000Base-T copper ports, four SFP-1000Base-SX/LX slots and optional SFP modules.

Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring. The PROFINET certificate (conformity class B) guarantees easy integration into PROFINET automation systems using the device description file (GSD). In addition, the device

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



supports the PROFINET Netload Class II.

The device supports flexible multi-port mirroring configuration via device description file or Web-Based Management. Function blocks allow cyclic PROFINET switch diagnostics to be efficiently implemented within the TIA Portal. An application note that outlines this process is available.

Features:

- Web-based/SNMP management
- Redundant DC power supply
- Power supply range: 12 ... 60 VDC
- DIP switches to set alarm functions
- Full compliance with IEEE802.3, 802.3u, 802.3ab, 802.3z, 802.3x, 802.1d, 802.1w, 802.1s, 802.1Q, 802.1p standards
- Media redundancy protocol (MRP) as manager (MRM) or client (MRC), redundant ring
- Non-blocking, store-and-forward switching, rapid spanning tree protocol (RSTP)
- Autonegotiation and AUTO-MDI/MDIX (crossover)
- VLAN (802.1Q) VID
- IGMP snooping
- Port configuration, status, statistics
- Port trunking and multi-port mirroring
- SNMP v1/v2c/v3 and RMON
- Time synchronization via SNTP
- Storm control, bandwidth limitation and loop detection

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100Base-TX ports	8
Number of 1000Base SX/LX ports	4
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3x Flow Control IEEE 802.1d Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1p Class of service IEEE 802.1ab Link Layer Discovery Protocol (LLDP) PROFINET Conformance Class B
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Media redundancy protocol as manager or client
Configuration options	DIP switch for signal contact

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Web-Based Management
Command Line Interface
SNMPv1/v2c/v3

Diagnostics	Signal contact; Port status; Port statistics; Port load; Traffic monitor; SFP information; Syslog; SNMP traps; PN diagnostics (cyclic and acyclic)
MAC table (size)	16000 addresses
Jumbo frame size	10000. Byte
Supply voltage	12 ... 60 VDC
Power consumption without PoE	12 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/1000 Mbit/s; Fiber optic: 1000 Mbit/s
VLAN	Port-based and tag-based (4k VIDs)

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 4 x SFP; LC fiber-optic connector
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inch
Height	162 mm / 6.378 inch
Depth	120 mm / 4.724 inch

Mechanical data

Weight	945 g
Color	metallic black

Environmental requirements

Surrounding air temperature (operation)	-40 ... 70 °C
Surrounding air temperature (storage)	-40 ... 80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

EMC emission of interference

per EN 61000-6-4

Commercial data

Packaging type	BOX
Country of origin	TW
GTIN	4055143918701
Customs tariff number	8517620090

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Optional accessories

Cables and pluggable connectors

	Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976
	Item no.: 750-977/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22	www.wago.com/750-977/000-011
	Item no.: 750-977/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22	www.wago.com/750-977/000-012
	Item no.: 750-977/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22	www.wago.com/750-977/000-013
	Item no.: 750-977/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24	www.wago.com/750-977/000-021
	Item no.: 750-977/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24	www.wago.com/750-977/000-022
	Item no.: 750-978/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief	www.wago.com/750-978/000-011

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

	Item no.: 750-978/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	www.wago.com/750-978/000-012
	Item no.: 750-978/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief	www.wago.com/750-978/000-013
	Item no.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief	www.wago.com/750-978/000-021
	Item no.: 750-978/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief	www.wago.com/750-978/000-022
	Item no.: 750-979/000-011 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	www.wago.com/750-979/000-011
	Item no.: 750-979/000-012 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	www.wago.com/750-979/000-012
	Item no.: 750-979/000-013 Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief	www.wago.com/750-979/000-013
	Item no.: 750-979/000-021 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief	www.wago.com/750-979/000-021
	Item no.: 750-979/000-022 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief	www.wago.com/750-979/000-022
Power supplies		
	Item no.: 787-1602 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 1 A	www.wago.com/787-1602
	Item no.: 787-1606 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 2 A	www.wago.com/787-1606
	Item no.: 787-1622 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 5 A	www.wago.com/787-1622
	Item no.: 787-1623 EPSITRON® CLASSIC power supply; single-phase; output voltage 48 VDC; 2 A	www.wago.com/787-1623
	Item no.: 787-1632 EPSITRON® CLASSIC power supply; 1-phase; output voltage 24 VDC; 10 A	www.wago.com/787-1632

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Item no.: 787-1633
EPSITRON® CLASSIC power supply; 2-phase; output voltage 48 VDC; 5 A

www.wago.com/787-1633



Item no.: 787-1635
EPSITRON® CLASSIC power supply; 2-phase; output voltage 48 VDC; 10 A

www.wago.com/787-1635

General accessories



Item no.: 852-1200
Fiber-optic module; 850 nm; 1000Base-SX multi-mode LC; 0.55 km; extended temperature range

www.wago.com/852-1200



Item no.: 852-1210
Fiber-optic module; 1310 nm; 1000Base-LX single-mode LC; 10 km; extended temperature range

www.wago.com/852-1210



Item no.: 852-1280
Fiber-optic module; 1550 nm; 1000Base-ZX single-mode LC; 80 km; extended temperature range

www.wago.com/852-1280

Interface module



Item no.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

www.wago.com/289-195

Downloads

Documentation

Manual

Industrial Managed Switch 8 Ports 1000BASE-T, 4x1000BASE-SX/LX, PROFINET; EXT	V 1.0.0 Dec 12, 2019	pdf 15.8 MB	Download
--	-------------------------	----------------	----------

Bid Text

852-1605	docx 18.0 kB	Download
----------	-----------------	----------

852-1605	xml 8.7 kB	Download
----------	---------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

System Description

Industrial Switches – General Product Information	pdf 2.0 MB	Download
---	---------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Runtime Software

Firmware

Firmware: 852-1605 Industrial-Managed-Switch; 8-Port 1000BASE-T; 4-Slot 1000BASE-SX/LX; PROFINET; Extended temperature range; metallic black	02 Dec 12, 2019	zip 9.0 MB	Download
--	--------------------	---------------	----------

CAD files

CAD data

2D/3D Models 852-1605	URL	Download
-----------------------	-----	----------

CAE data

ZUKEN Portal 852-1605	URL	Download
-----------------------	-----	----------

EPLAN Data Portal 852-1605	URL	Download
----------------------------	-----	----------

Device Files

Device Description File

750-916; GSD-Dateien der Version 2.x für PROFINET/ Serie 750/753, 765, 767 und 852	2.81 Apr 15, 2021	zip 2.4 MB	Download
--	----------------------	---------------	----------

GSD-Dateien der Version 2.x für PROFINET	2.33 Jul 9, 2019	zip 44.1 kB	Download
--	---------------------	----------------	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-1605 Industrial-Managed-Switch; 8-Port 1000BASE-T; 4-Slot 1000BASE-SX/LX; PROFINET; Extended temperature range; metallic black	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.