


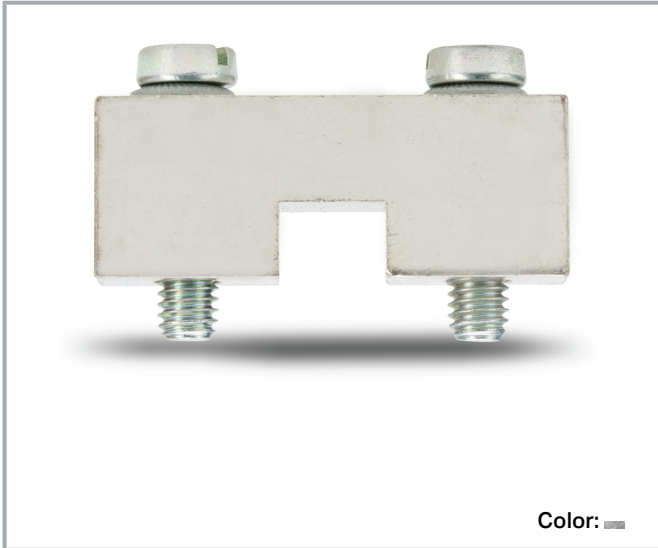

Data

Electrical data

IEC Approvals

Rated voltage (III / 3)	1000 V
Rated current	269 A
Rated current 2	290 A

Physical data

Width	44 mm / 1.832 inch
Depth	10 mm / 0.394 inch

Mechanical data

Tightening torque	3.2 ... 3.7 Nm
-------------------	----------------

Material data

Color	silver-colored
-------	----------------

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Weight	64.9 g
--------	--------

Commercial data

Packaging type	bag
Country of origin	DE
GTIN	4055143940450
Customs tariff number	8536698000

Downloads

Documentation

Bid Text

883-1242	docx	Download
docx - Datei	12.7 kB	

883-1242	xml	Download
X81 - Datei	2.9 kB	

Additional Information

Technical explanations	Apr 3, 2019	pdf	Download
		2.2 MB	

CAD files

CAD data

2D/3D Models 883-1242	URL	Download
-----------------------	-----	----------

CAE data

ZUKEN Portal 883-1242	URL	Download
-----------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 883-1242	URL	Download
Jumper; 2-way; unplated; silver-colored		

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.