


Data sheet | Item number: 883-2442

Jumper; 2-way; insulated; yellow

www.wago.com/883-2442

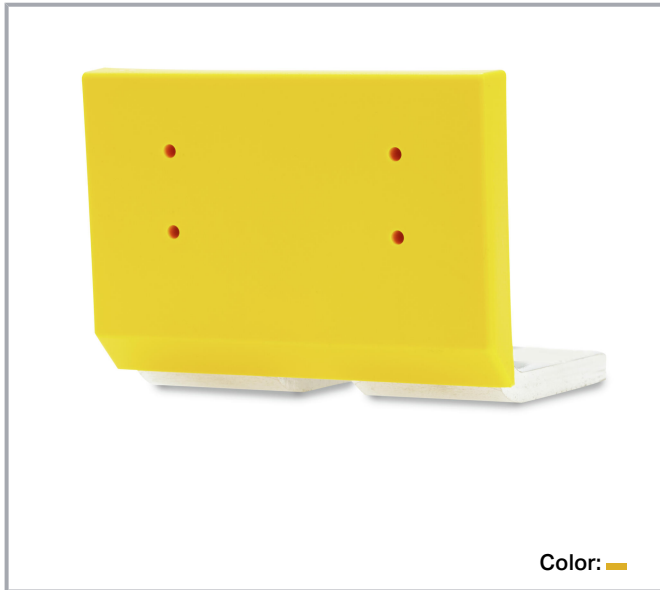

Data

Electrical data

IEC Approvals

Rated voltage (III / 3)	1000 V
Rated current	380 A

Physical data

Width	66.3 mm / 2.61 inch
-------	---------------------

Material data

Color	yellow
Flammability class per UL94	V2
Weight	204.6 g

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Commercial data

Packaging type	bag
Country of origin	DE
GTIN	4055143940566
Customs tariff number	8536698000

Downloads

Documentation

Bid Text

883-2404	xml	Download
docx - Datei	2.8 kB	
883-2442	docx	Download
X81 - Datei	12.6 kB	

Additional Information

Technical explanations	Apr 3, 2019	pdf	Download
		2.2 MB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 883-2442	URL	Download
Jumper; 2-way; insulated; yellow		


Installation Notes

Commoning

Subject to changes. Please also observe the further product documentation!


WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

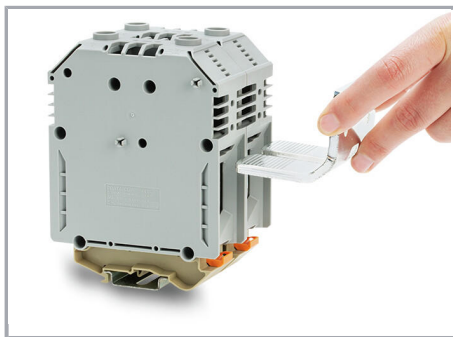

Commoning

Step 1: Insert the 2- or 3-way jumper into the conductor entry to connect adjacent terminal blocks.

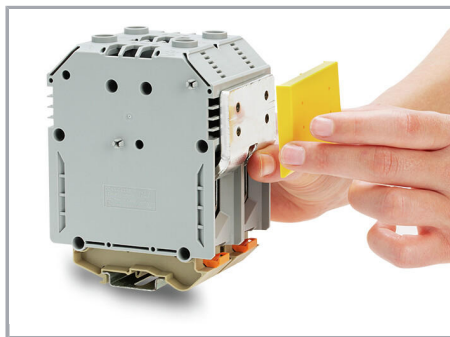

Brücken

Schritt 2: Die gelbe Isolierkappe aufsetzen und mit dem Gehäuse verrasten, um den Brücken in der Klemmstelle zu positionieren.



Brücken

Schritt 3: Durch das Anziehen der Schraube im Betätigungs kanal wird der Brücken in der Leitereinführung fixiert. Bei Bedarf kann zusätzlich ein elektrischer Leiter in die Leitereinführung eingeführt und zusammen mit dem Brücken geklemmt werden. Durch die Leitereinführung auf beiden Seiten ist eine x-fache Potentialvervielfältigung möglich. Die Brücken sind für den Bemessungsstrom der Schraubklemme ausgelegt.

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.