



Data sheet | Item number: 885-108

Stud terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; 1 stud, M8

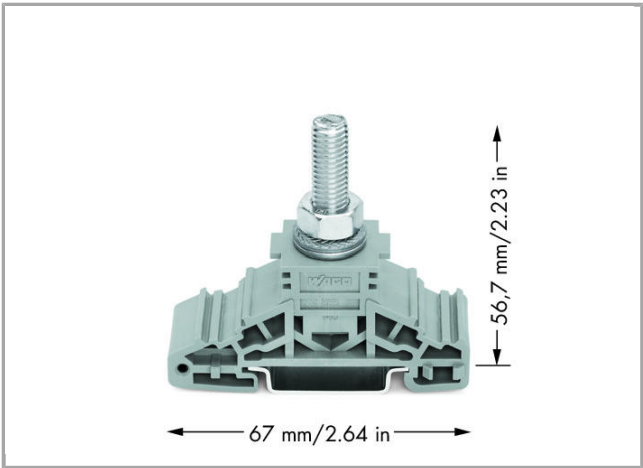

885-108

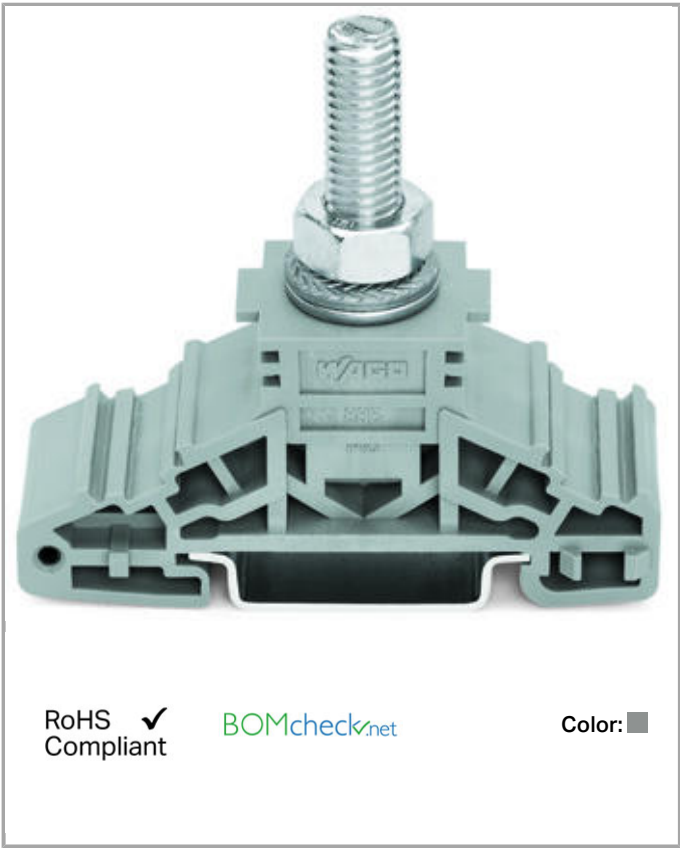

RoHS
Compliant



Color:

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated current	150 A

Connection data

Connection technology	Screw-clamp connection/Studs
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	2.5 ... 50 mm ² / 14 ... 1/0 AWG
Total number of connection points	1
Total number of potentials	1

Type of wiring	Front-entry wiring
----------------	--------------------

Geometrical Data

Width	22.8 mm / 0.898 inch
Height from upper-edge of DIN-35 rail	56.7 mm / 2.232 inch
Depth	67 mm / 2.638 inch

Mechanical data

Tightening torque	6 ... 12 Nm
Type of mounting	DIN-35 rail
Marking level	Side marking

Material Data

Color	gray
Fire load	0.537 MJ
Weight	46.76 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Country of origin	CN
GTIN	4050821049234
Customs Tariff No.	85369095990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL 6882
	CCA DEKRA Certification B.V.	EN 60947	2145295.01
	CSA DEKRA Certification B.V.	C22.2 No. 158	70038960


UL-Approvals

Certificate

Logo	Approval	Additional Approval Text	name
	UL UL International Germany GmbH	UL 1059	E45172

Compatible products

N-busbar

	Item no.: 885-566 Cover; 1 m long	885-566
--	--------------------------------------	---------

Marking accessories

	Item no.: 2009-110 Marking strips; on reel; not stretchable; plain; snap-on type	2009-110
	Item no.: 2009-115 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115
	Item no.: 2009-115/000-002 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-002
	Item no.: 2009-115/000-006 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-006
	Item no.: 2009-115/000-007 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-007
	Item no.: 2009-115/000-012 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-012
	Item no.: 2009-115/000-017 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-017
	Item no.: 2009-115/000-023 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-023
	Item no.: 2009-115/000-024 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-115 /000-024
	Item no.: 2009-135 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	2009-135



Item no.: 2009-198
Adaptor

2009-198

End plate



Item no.: 885-528
Separator plate; 2 mm thick; 110.3 mm wide

885-528



Item no.: 885-548
Separator plate with jumper bar recess; 2 mm thick; 110.3 mm wide

885-548

General accessories



Item no.: 885-580
Clip; secures cover against slipping

885-580

Jumper



Item no.: 885-408
Assembled jumper bar; 2-way

885-408



Item no.: 885-428
Assembled jumper bar; 3-way

885-428



Item no.: 885-448
Step-down adjacent jumper bar; 1 level; from M8 to M6

885-448

Downloads

Documentation

Additional Information

pdf
2.1 MB

[Download](#)

CAD/CAE - Smart Data

CAD data

3D Download 885-108

[URL](#)
[Download](#)

Subject to changes.