


Data sheet | Item number: 885-308

Stud terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; 3 studs, M8



885-308

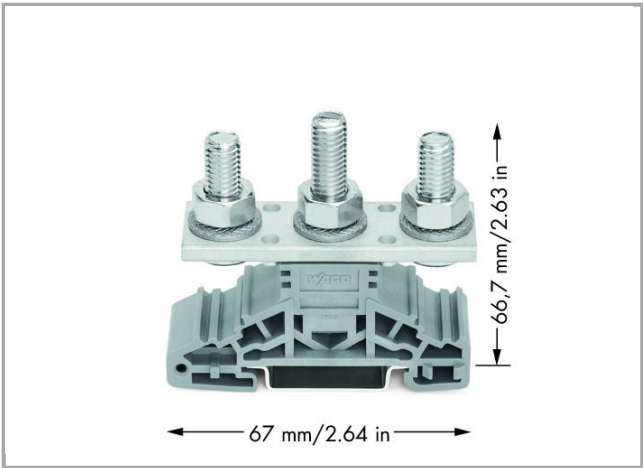

RoHS
Compliant



Color:

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated current	150 A

Connection data

Connection technology	Screw-clamp connection/Studs
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	2.5 ... 50 mm ² / 14 ... 1/0 AWG
Total number of connection points	3
Total number of potentials	1
Type of wiring	Front-entry wiring

Geometrical Data

Width	22.8 mm / 0.898 inch
Height from upper-edge of DIN-35 rail	56.7 mm / 2.232 inch
Depth	67 mm / 2.638 inch

Mechanical data

Tightening torque	6 ... 12 Nm
Type of mounting	DIN-35 rail
Marking level	Side marking

Material Data

Color	gray
Fire load	0.537 MJ
Weight	121.8 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Country of origin	CN
GTIN	4050821049265
Customs Tariff No.	85369095990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL 6882
	CCA DEKRA Certification B.V.	EN 60947	2145295.01
	CSA DEKRA Certification B.V.	C22.2 No. 158	70038960

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------



UL
UL International Germany GmbH

UL 1059

E45172

Compatible products

End plate



Item no.: 885-528
Separator plate; 2 mm thick; 110.3 mm wide

885-528



Item no.: 885-548
Separator plate with jumper bar recess; 2 mm thick; 110.3 mm wide

885-548

Marking accessories



Item no.: 2009-110
Marking strips; on reel; not stretchable; plain; snap-on type

2009-110



Item no.: 2009-115
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115



Item no.: 2009-115/000-002
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-002



Item no.: 2009-115/000-006
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-006



Item no.: 2009-115/000-007
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-007



Item no.: 2009-115/000-012
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-012



Item no.: 2009-115/000-017
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-017



Item no.: 2009-115/000-023
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-023



Item no.: 2009-115/000-024
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-024

Item no.: 2009-135
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type


2009-135



Item no.: 2009-198
Adaptor

2009-198

N-busbar



Item no.: 885-566
Cover; 1 m long

885-566

General accessories



Item no.: 885-580
Clip; secures cover against slipping

885-580

Jumper



Item no.: 885-408
Assembled jumper bar; 2-way

885-408



Item no.: 885-428
Assembled jumper bar; 3-way

885-428



Item no.: 885-448
Step-down adjacent jumper bar; 1 level; from M8 to M6

885-448

Downloads

Documentation

Additional Information

pdf
2.1 MB

[Download](#)

CAD/CAE - Smart Data

CAD data

3D Download 885-308

[URL](#)
[Download](#)

Subject to changes.