


Data sheet | Item number: 890-131

Locking lever; for flying leads; for tool operation

890-131

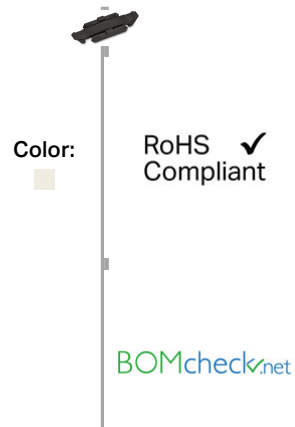

Data

Electrical data

Note on Contact Resistance

approx. 1m Ω contact resistance

approx. 0.25m Ω contact transition plug/socket

Connection data

Actuation type

Operating tool

Mechanical data

Protection class

IP20

Note on protection class

Only in mated condition with strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug connection

Mismating protection

Yes

Locking of plug-in connection

locking lever

Material Data

Color

white

Insulating material

Polyamide 66 (PA 66)



Flammability class per UL94	V0
Contact material	Copper or copper alloy, surface-treated
Fire load	0.011 MJ
Weight	0.45 g

Environmental Requirements

Surrounding air (operating) temperature	-35 ... 85 °C
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4045454232993
Customs Tariff No.	85366990990

Downloads

Documentation

Bid Text

890-131	Apr 4, 2012	doc	Download
WINSTA Accessories		22.0 kB	

CAD/CAE - Smart Data

CAD data

3D Download 890-131	URL	Download
---------------------	-----	----------

Subject to changes.