
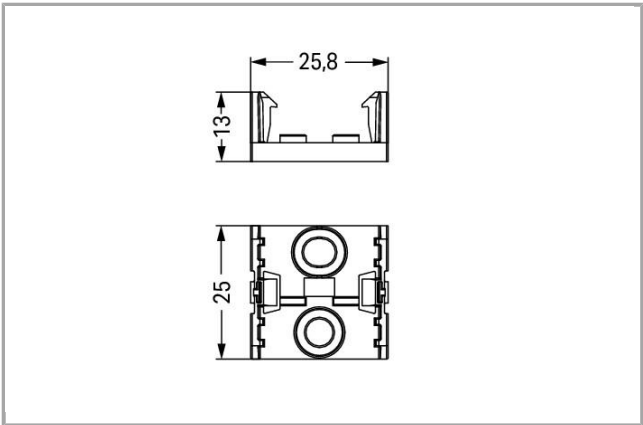


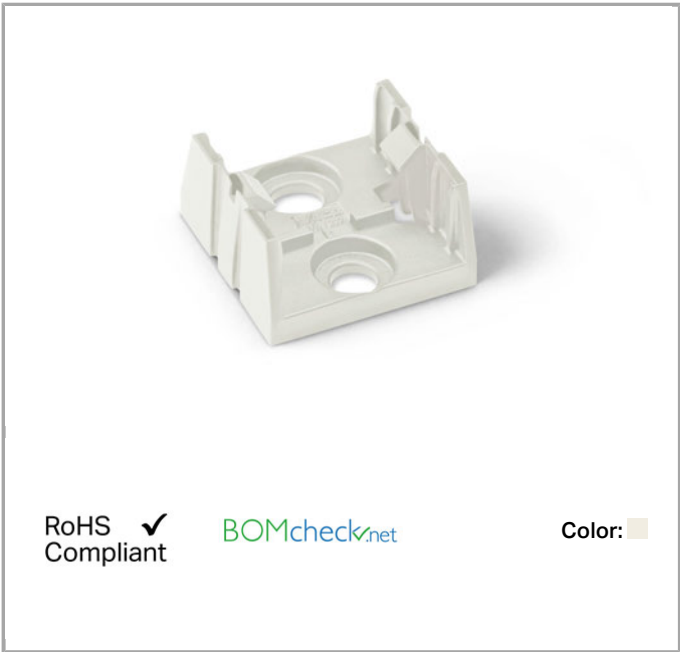

RoHS


Compliant

✓

BOMcheck

net

Color:

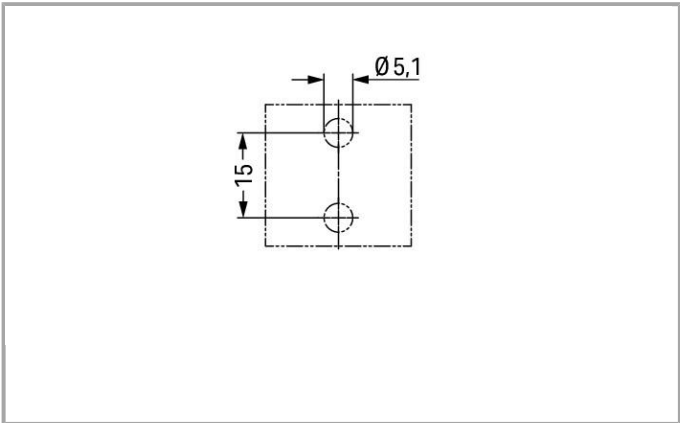

Data

Mechanical data

Mounting type	Screw mounting
---------------	----------------

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.064 MJ



Weight	2.14 g
--------	--------

Environmental Requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
Country of origin	DE
GTIN	4055143838856
Customs Tariff No.	85366990990

Downloads

Documentation

Bid Text

890-674	doc 22.0 kB	Download
---------	----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 890-674	URL	Download
---------------------	-----	----------

WSCAD

WSCAD Universe	Download
----------------	----------

Subject to changes.