


Connect Specs



3 inches
(76.2 mm)

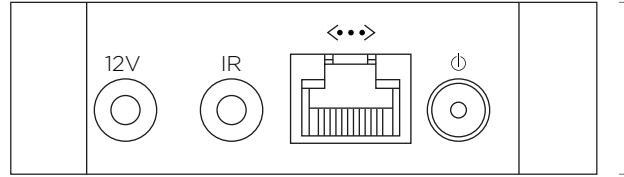

0.88 inches
(22.4mm)

Dimensions

3" x 3" x .88"
[76.2mm x 76.2mm x 22.4mm]

Connect Weight

2.3 oz. [0.07 kg]

Shipping Weight with accessories

1 lb. [0.45kg]

Operating Temperature Range

0°C - 50°C

Indoor dry location use only.
Not for outdoor applications.

Features

- Connect converts common inputs (IR, DC, etc) to RF signal to control Solo. Program a universal IR remote, or trigger directly via 12V or RJ12.
- Wireless RTS Range (distance of Connect to screen): 70 ft. max. Distance may be reduced by interfering objects such as walls, A/V wiring covering the box, metal furniture, etc or by box orientation. Do not install inside of a metal enclosure.



Orientation

Connect can be oriented horizontally or vertically (horizontal preferred), as long as the built-in IR eye has an unobstructed view of the controlling remote. Enclosures, especially rack-mounts, may interfere with or reduce the strength of the RF signal.

Power Supply

- Power supply included. Power supply operates on 100 - 240VAC, 50/60 Hz.
 - Power indicator light visible through the case when the power supply is connected.
-



Inputs

- Front IR eye - for use with Universal Remote Controls. LINE-OF-SIGHT operation.
- 12V DC trigger - direct-current trigger deploys screen to lower limit and raises to closed. NON-LINE-OF-SIGHT operation.
- Extended IR trigger. LINE-OF-SIGHT operation.
- Dry contact RJ12 jack. See Connect instruction manual for contact pinout. NON-LINE-OF-SIGHT operation.

For more information please contact SI at sales@screeninnovations.com or visit www.screeninnovations.com