
JENN-AIR® DETAILED PLANNING DIMENSIONS

30" COLUMN FREEZER


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR30IGX, JBZFL30IGX – 29⅞" x 83⅞₁₆" x 23⁴³⁄₆₄" (without door/handles)

PRODUCT DIMENSIONS

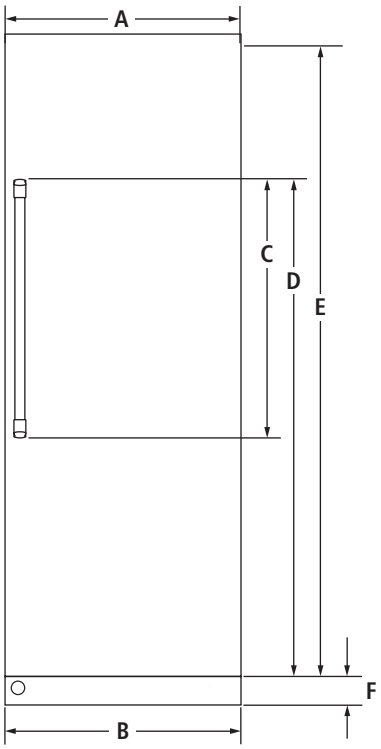

FRONT VIEW

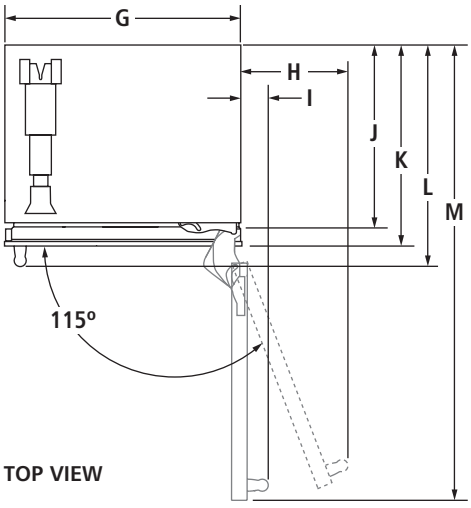

TOP VIEW

MODEL #		JBZFR30IGX JBZFL30IGX	
		in	cm
A	Width of door	29¾	75.6
B	Overall width	29⅞	75.9
C	Height of door handle Pro-Style® Stainless	45³⁵⁄₆₄	115.7
	Euro-Style Stainless	50¹⁄₆₄	127.1
	Custom panel (¾"/1.9 cm)*	**	**
D	Height to top of door handle Pro-Style® Stainless	66¹⁄₆₄	167.7
	Euro-Style Stainless	68¹⁷⁄₆₄	173.4
	Custom panel (¾"/1.9 cm)*	**	**
E	Height of door	79⅞	202.9
F	Height of bottom grille	3³⁵⁄₆₄	9
G	Width of recessed freezer	29⁹⁄₁₆	75.1
H	Width from side of freezer to handle – door fully open 115° Pro-Style® Stainless	15¹¹⁄₁₆	39.9
	Euro-Style Stainless	15¹⁵⁄₆₄	38.7
	Custom panel (¾"/1.9 cm)*	**	**
I	Width from side of freezer to handle – door open 90° Pro-Style® Stainless	4¹⁄₃₂	10.2
	Euro-Style Stainless	3⁷⁄₁₆	8.7
	Custom panel (¾"/1.9 cm)*	**	**
J	Depth without door panel kit	23⁴³⁄₆₄	60.1
K	Depth with door Pro-Style® Stainless	24½	62.2
	Euro-Style Stainless	24½	62.2
	Custom panel (¾"/1.9 cm)*	24½	62.2
L	Depth with handle Pro-Style® Stainless	27⅛	68.9
	Euro-Style Stainless	26¹⁷⁄₃₂	67.4
	Custom panel (¾"/1.9 cm)*	**	**
M	Depth with door open 90°	56⅜	143.2

*Custom panels should not exceed ¾" (1.9 cm) thickness.

**For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

JENN-AIR®


JENN-AIR® DETAILED PLANNING DIMENSIONS

30" COLUMN FREEZER

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR30IGX, JBZFL30IGX – 29⅞" x 83⁷⁄₁₆" x 23⁴³⁄₆₄" (without door/handles)

DIMENSIONS AS INSTALLED

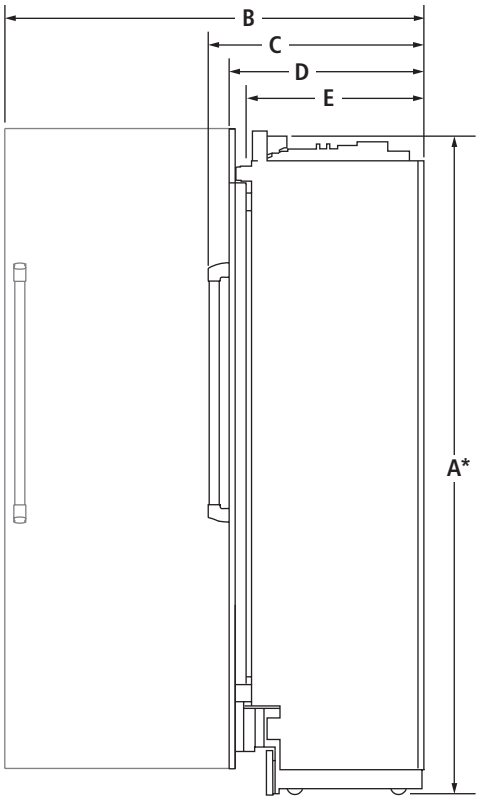

SIDE VIEW

MODEL #		JBZFR30IGX JBZFL30IGX	
		in	cm
A*	Height of recessed freezer	83¹⁹⁄₆₄	211.6
B	Depth with door open 90° (min.)	56⅜	143.2
C	Depth with handle (min.) Pro-Style® Stainless	27⅛	68.9
	Euro-Style Stainless	26¹⁷⁄₃₂	67.4
	Custom panel (¾"/1.9 cm)**	†	†
D	Depth with door (min.) Pro-Style® Stainless	24½	62.2
	Euro-Style Stainless	24½	62.2
	Custom panel (¾"/1.9 cm)**	24½	62.2
E	Depth without door panel kit (min.)	23⁴³⁄₆₄	60.1

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

**Custom panels should not exceed ¾" (1.9 cm) thickness.

†For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

JENN-AIR®


JENN-AIR® DETAILED PLANNING DIMENSIONS

30" COLUMN FREEZER


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR30IGX, JBZFL30IGX – 29⅞" x 83⁷⁄₁₆" x 23⁴³⁄₆₄" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

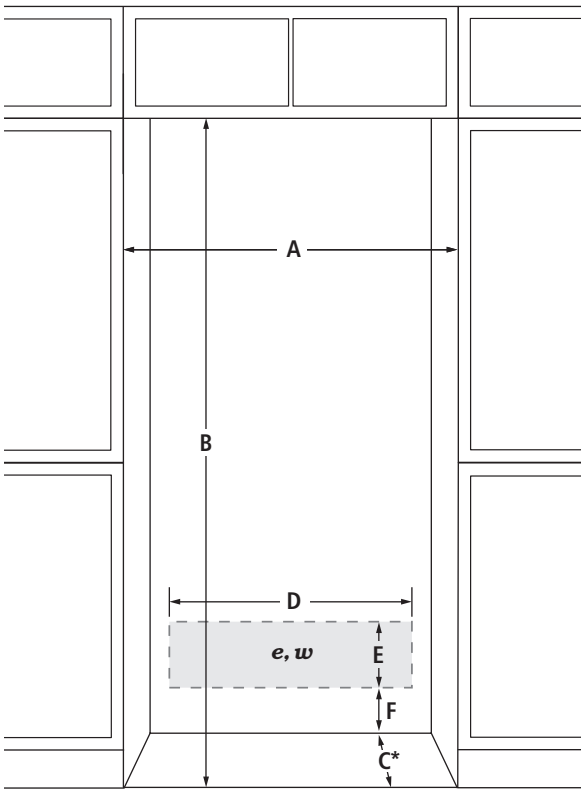

FRONT VIEW

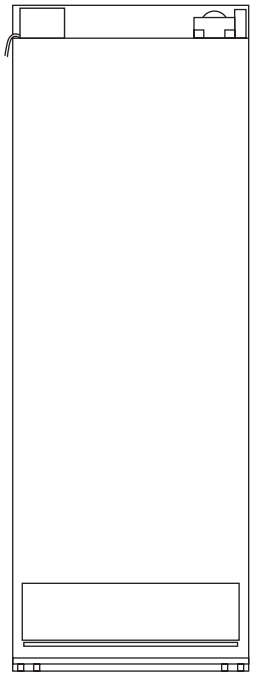

BACK VIEW

MODEL #		JBZFR30IGX JBZFL30IGX	
		in	cm
A	Width (min.)	30	76.2
B	Height (min.)	84	213.4
C*	Depth (min.)	25	63.5
D	Width of recommended electrical location	26	66.0
E	Height of recommended electrical location	6½	16.5
F	Height to recommended electrical location	4½	11.4
e	Recommended electrical connection location		
w	Recommended water connection location		

*A minimum 8" (20.3 cm) furniture return must extend behind the face of the cabinet on all sides.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

Jenn-Air® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

JENN-AIR®