
DETAILED PLANNING DIMENSIONS
15" ICE MACHINES


WUI75X15H/ WUI95X15H– D 24" x W 14⅝" x H 33⁴⁹⁄₆₄" (depth without handle)

PRODUCT DIMENSIONS

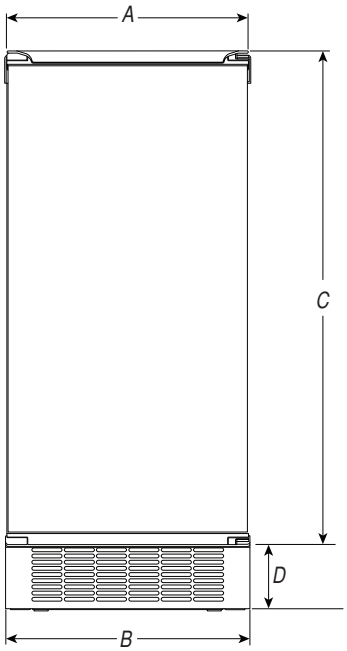

FRONT VIEW

.

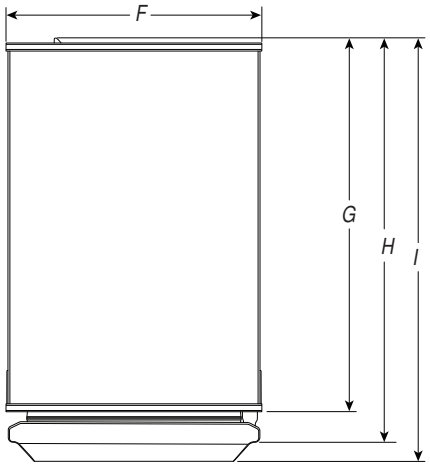

TOP VIEW

MODEL #		WUI75X15H, WUI95X15H	
		in	cm
A	Width	$14\frac{5}{8}$	37.15
B	Width of grille	$14\frac{25}{32}$	37.55
C	Height of door	$29\frac{55}{64}$	75.85
D	Height of grille	$3\frac{29}{32}$	9.95
E	Width of recessed ice machine	$14\frac{29}{32}$	37.81
F	Width from side of ice machine to door fully open	$5\frac{7}{8}$	14.94
G	Depth without door	$21\frac{21}{32}$	55.02
H	Depth with door	$23\frac{13}{32}$	59.46
I	Depth with handle	$24\frac{9}{16}$	62.42

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.


Whirlpool®

DETAILED PLANNING DIMENSIONS
15" ICE MACHINES

WUI75X15H/ WUI95X15H– D 24" x W 14⅝" x H 33⁴⁹⁄₆₄" (depth without handle)

MODEL #		WUI75X15H, WUI95X15H	
		in	cm
A*	Height to top of door (min.)	33 7/8	86.03
B*	Height to top of grille (min.)	3 29/32	9.95
C*	Height of recessed ice machine (min.)	33 29/64	85.38
D	Depth with door open 90° (min.)	37 3/8	94.92
E	Depth with door (min.)	23 13/32	59.46
F	Depth without door (min.)	21 9/16	54.76
G	Depth of grille (min.)	19 63/64	50.76

* Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

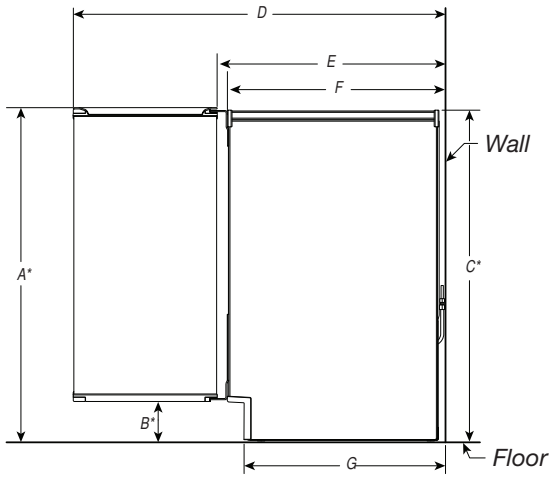

SIDE VIEW


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

Whirlpool®


DETAILED PLANNING DIMENSIONS
15" ICE MACHINES

WUI75X15H/ WUI95X15H– D 24" x W 14⅝" x H 33$^{49}/_{64}$" (depth without handle)


OPENING/CLEARANCE DIMENSIONS

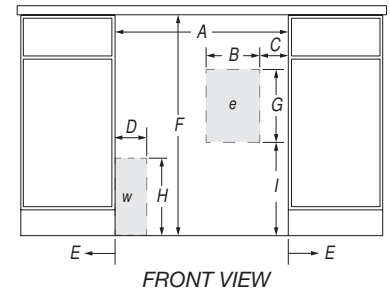

FRONT VIEW



SIDE VIEW

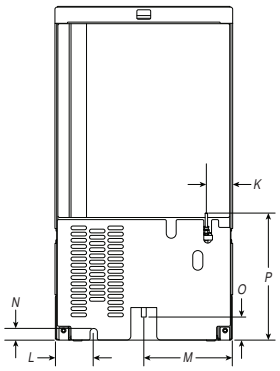

BACK VIEW

MODEL #		WUI75X15H, WUI95X15H	
		in	cm
A*	Width (min.)	15	38.1
	Width without hinge side spacer option (min.)	15	38.1
	Width with hinge side spacer option (min.)	15¾	40.0*
B*	Width of outlet location	6	15.0
C*	Outlet location – distance from side	1	2.5
D*	Width of water connection location	3½	8.9
E	Minimum width from hinged side of ice machine to fixed wall – door open 90°	2	5.1
	Minimum width from hinged side of ice machine to fixed wall – door fully open 180°	13¼	33.7
	Minimum width from hinged side of ice machine to fixed wall – door fully open 118°	6⅞	17.4
F	Height (min.)	34	86.4
G	Height of outlet location	8	20.3
H	Height of water connection location	9	22.9
I	Outlet location – distance from bottom	12	30.5
J	Depth of cabinet (min.)	24	61.0
K	Water line location – distance from side	$2^{39}/_{64}$	6.64
L	Power supply – distance from side	$3^{49}/_{64}$	9.57
M	Drain hose – distance from side	$7^{5}/_{16}$	18.57
N	Power supply – distance from bottom	$1^{1}/_{4}$	3.17
O	Drain hose – distance from bottom	$2^{43}/_{64}$	6.79
P	Water line location – distance from bottom	$14^{7}/_{32}$	36.12
e	Recommended electrical connection location		
w	Recommended water connection location		

* Install 3⁄4" (1.9 cm) front hinge-side spacer flush with face of adjacent cabinet and 3⁄4" (1.9 cm) back hinge-side spacer 6" (15.2 cm) from back wall.

ELECTRICAL REQUIREMENTS

115 V, 60 Hz, AC only, 15 or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The use of a reverse osmosis system with this product is not recommended. However if you do use reverse osmosis, follow these instructions.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the ice machine needs to be between 30 and 120 psi (207 and 827 kPa). If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

®/™ ©2019 Whirlpool. All rights reserved.