


- Disconnect from electric supply before servicing.
- Replace all panels before operating.

TIMER POSITION	TIMER SWITCH					
	TM-OR	TM-WB	BM-BU-Y	BK-BU	BK-R	T-W
AUTO-REGULAR						
AUTO-SOFT/LOW HEAT						
COOL DOWN & AIR	⊖	⊖	■			
END OF CYCLE						
TIMED-REGULAR						
TIMED-SOFT/LOW HEAT						
GUARD						+

LEGEND


- = OPEN
- = CLOSED
- ⊖ = DOESN'T MATTER
- ⊙ = EITHER (NOT BOTH)
- ⊕ = CLOSED INTERMITTENTLY

3.702.030	3.962.617
3.762.064	4.086.709
3.769.716	4.132.008
3.815.258	4.385.452
3.889.392	4.430.809
3.890.720	4.003.613
3.959.691	4.821.535



PLUGGABLE DRIVE MOTOR SWITCH

WIRING DIAGRAM

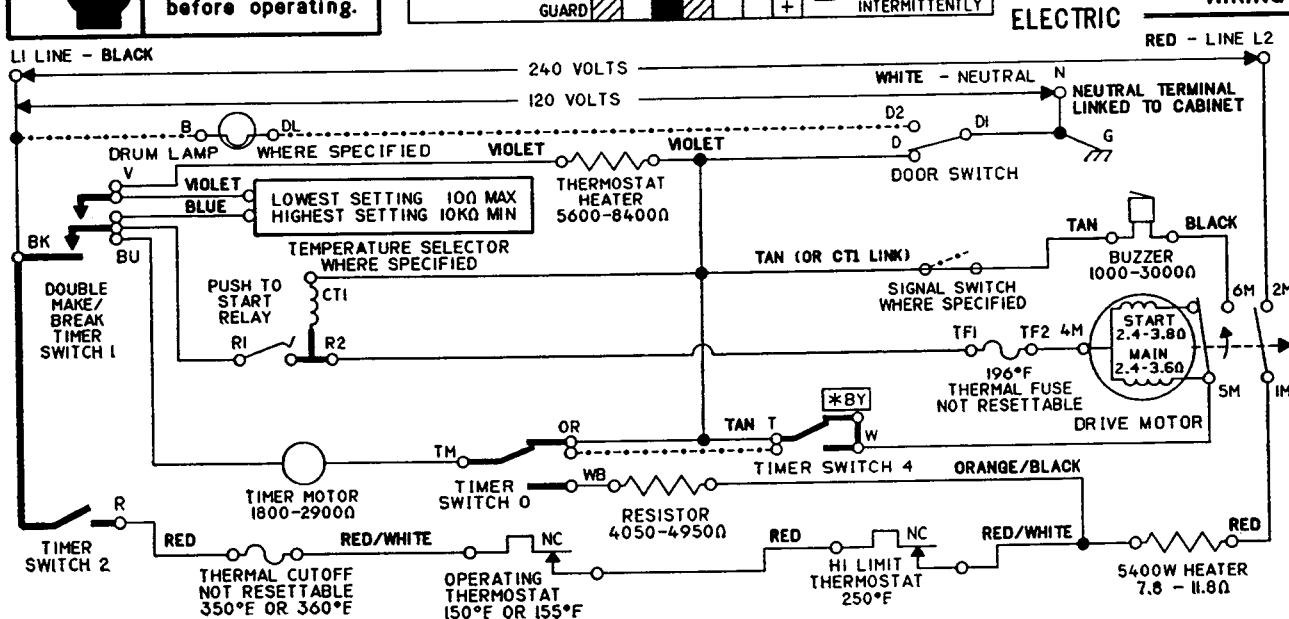

LABEL NO.
3399691 REV A

