

- NOTES: (APPLIED TO CURRENT SHEET)
1. THE DIRECTION OF EACH CONNECTOR ON A EMOSS IS REFERRED TO THIS DRAWING.
  2. PACKAGED IN EMOSS TAPE AND PLASTIC REEL 4000 PCS PER REEL.
  3. WINDING THE COVER TAPE AROUND THE OUTER PERIPHERY IN A TURN.


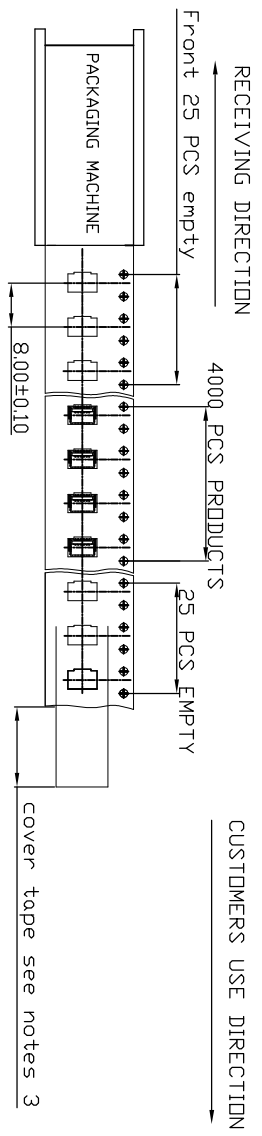


TABLE A

P/N	PIN NO.	Amount of packing		Weight of packing			DIM.A	DIM.B	
		Pcs/ Reel	Reel/ Carton	Pcs/ Carton	Unit weight (g)	Net weight (kg)			GW (kg)
2-2328702-4	24	4,000	5	20,000	0.0827	1.654	5.735	24.00	11.50
1-2328702-0	10	4,000	7	28,000	0.0405	1.134	5.06		
2328702-8	8	4,000	7	28,000	0.0335	0.938	4.845	16.00	7.50
2328702-6	6	4,000	7	28,000	0.0280	0.784	4.675		
2328702-4	4	4,000	7	28,000	0.0218	0.611	5.735		

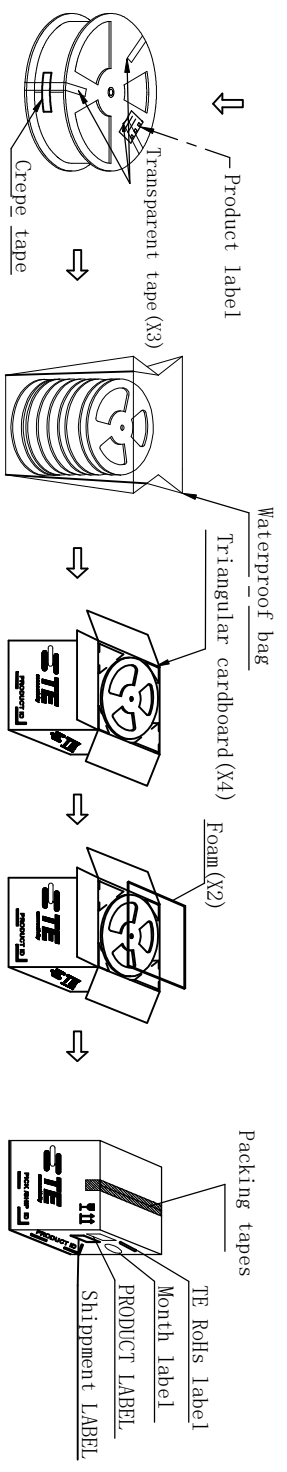

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	ELIANA ZHANG	28DEC2017	NAME	<b>STE</b> TE Connectivity
CHK	WENKE HE	20171228	APVD	WENKE HE
APVD	WENKE HE	20171228	PRODUCT SPEC	108-115142
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APPLICATION SPEC	
DIMENSIONS: mm			WEIGHT	SEE TABLE
0 PLC	±0.40		CUSTOMER DRAWING	
1 PLC	±0.25			
2 PLC	±0.15			
3 PLC	±0.10			
4 PLC ANGLES	±			
MATERIAL				

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2328702-0](#) [2328702-6](#) [2328702-8](#) [2328702-4](#)