



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
F1		REVISED PER ECO-11-020548	06FEB12	KH	DR
F2		REVISED PER ECO-17-014338	26MAR2018	RS	DR

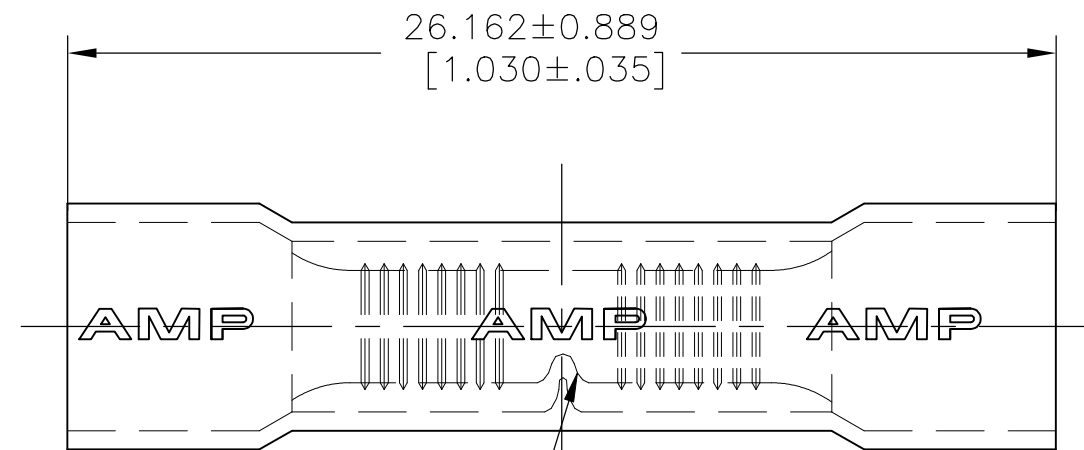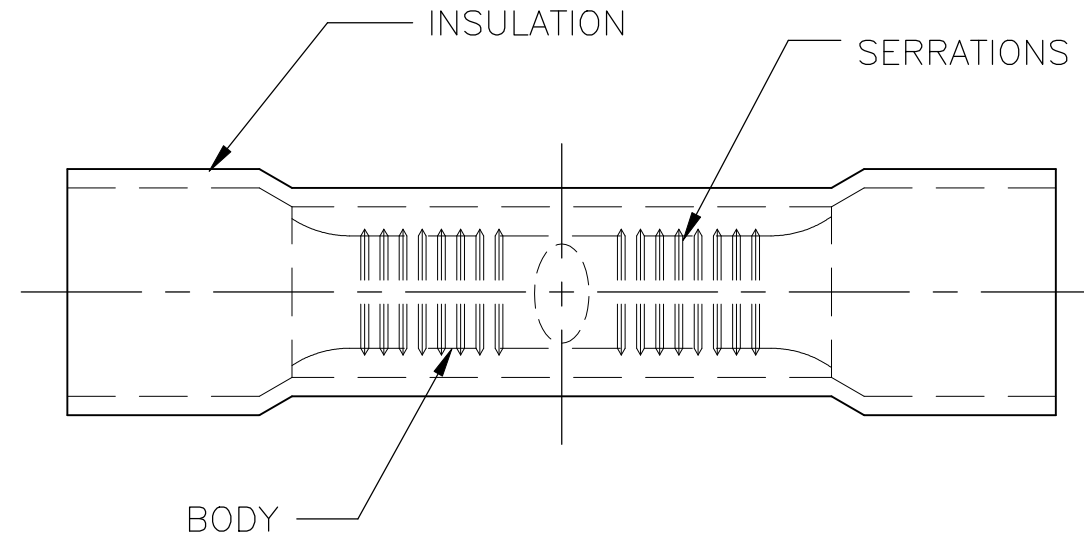

E13288 Listed	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

1 FOR 5.461[.215] MAX WIRE INSULATION DIA

2000	TAPE AND REEL	INSULATION: PVC COLOR: BLUE BODY: COPPER PER ASTM B152, ANNEALED TIN PLATE PER ASTM B545	2-35244-1
1000	LOOSE PIECE		35244
QTY	PACKAGE TYPE	MATERIAL & FINISH	PART NO

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN KIRAN HOLAL 06FEB12

CHK ROHDE DANIEL 06FEB12

APVD ROHDE DANIEL 06FEB12



FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS  
PRODUCT INFORMATION CENTER  
1-800-522-6752

FOR APPLICATION TOOLING ASSISTANCE CENTER  
TOOLING INFORMATION  
1-800-722-1111


FOR ORDER ENTRY  
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:  
105°C [221°F] MAX

VOLTAGE RATING:  
600V MAX  
[1000V SIGN'S OR FIXTURES]

WIRE CROSS SECTIONAL AREA RANGE,  
1.04-2.62mm<sup>2</sup>[4,050-5,180] CIR MILS

DIMENSIONS:  
mm [INCHES]



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± -
FINISH	-

MATERIAL  
-

PRODUCT SPEC  
UL 486 A-B

APPLICATION SPEC  
114-2161

WEIGHT

NAME  
WIRE SPLICE  
PLASTI-GRIP,BUTT  
WIRE SIZE 16-14 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-35244	-

CUSTOMER DRAWING

SCALE 5:1

SHEET 1 OF 1

REV F2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[35244](#)