



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--------------------------------|------|------|-----|
| 10/03/14 | А | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



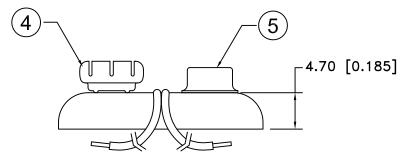

NOTES:

1. T STYLE 2 PCS. MOLDED CASE CONSTRUCTION WITH CRIMP CONNECTIONS. CRIMP ON WIRE INSULATION AND ON WIRE PROVIDES STRAIN RELIEF THAT STANDARD SOLDERED SNAPS DO NOT HAVE.

| N0. | PART NAME | MATERIAL | | T |
|-----|---------------|--|---|-----|
| 1 | MOLDED CASE | 2 PCS., POLYETHYLENE, WHITE WITH BLUE INSERT | 1 | (E: |
| 2 | BLACK WIRE(-) | 24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C | 1 | d |
| 3 | RED WIRE (+) | 24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C | 1 | |
| 4 | FEMALE SNAP | BRASS, NICKLE PLATED | 1 | Ŀ |
| 5 | MALE SNAP | BRASS NICKLE PLATED | 1 |]F |

ROHS 2 COMPLIANT

Tolerance
(Except as noted)

Memory Protection Devices, Inc
200 Broad Hollow Road, Farmingdale, New York 11735

decimal

±.5 (.020)

Approved By T.B.

Fractional

Title O VOLT PATTERNY SNAP T STYLE 4" WIDE LEADS

Fractional Title 9 VOLT BATTERY SNAP-T STYLE-4" WIRE LEADS,

MOLDED CASE

| , , | | |
|---------|----------|----------------|
| Angular | Date | Drawing Number |
| ± 3° | 10/03/14 | BS4T-MC |