


PROPOSED WORK:

Summary: 5-inch white aluminum gutter and downspout replacement on the left side of the house (2 story section ONLY)

Work Description: Remove the existing gutters in the area mentioned above.

- 1. Check and re-nail any loose fascia board.
- 2. Provide and Install 5-inch Aluminum K-style seamless gutters.
- 3. Provide and Install 2-inch by 3-inch white aluminum downspouts where applicable
- 4. Ensure that the downspouts are pouring away from the building foundations.
- 5. Provide and apply Geocel 2320® Construction Tripolymer Gutter and Narrow Seams Sealant.
- 6. Seal the entire gutter and downspout installation.



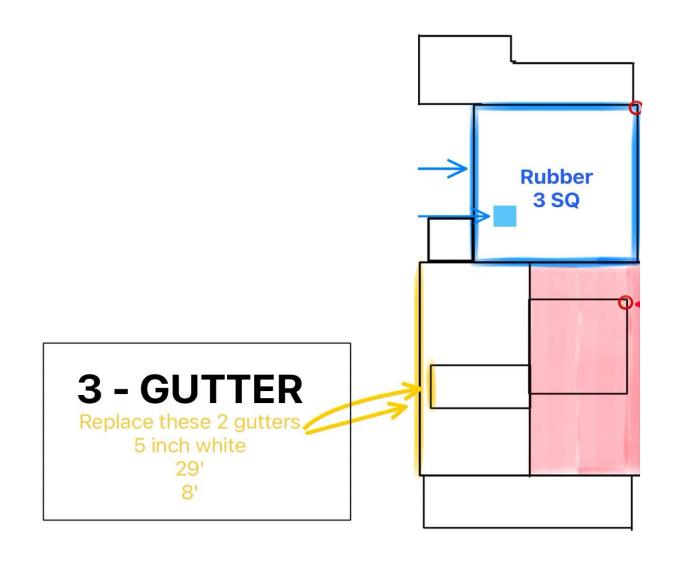















THANK YOU!

FRS ROOFING TEAM