

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

- INPUT VOLTAGE**
AC 120~277V, 347V, 480V
- FREQUENCY**
50~60HZ
- COLOR TEMPERATURE**
5000K
- COLOR RENDERING INDEX**
70
- DISTRIBUTION**
V Medium
- IP RATING**
IP65
- OPERATING TEMPERATURE**
-40°C~+45°C
- LIFE SPAN**
50,000hrs
- DIMMING**
1-10V



Product Showcase

FEATURES


- Efficacy higher than 120lm/W with zero up-light.
- Durable, die-cast aluminum housing. 3" tenon top connection built-in.
- Symmetry or unilateral foot appearance for different style choices.
- Type V (symmetric) light distributions.
- Suitable for installation heights of 8-20 feet.
- Option for "Assembled in America" upon request.
- IP65 Rated, suitable for outdoor / wet applications.
- UL / cUL Listed

Option Available upon Request:
PROUDLY ASSEMBLED in AMERICA



Product Features

Dimensions

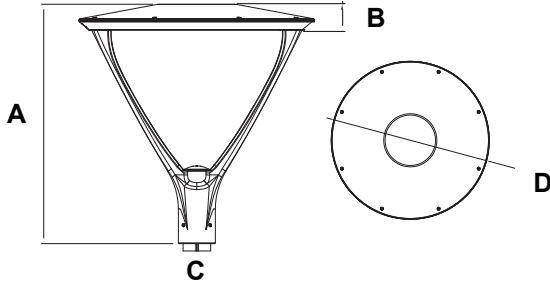

Model	A	B	C	D
45W-130W	616mm (24.30")	70mm (2.80")	100.4mm (4.0")	ø640mm (25.20")

Ordering Information

PT2 - 5M - SF3 DB UD

Series	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage
PT2	45 - 45W (5400lm) 70 - 70W (8400lm) 90 - 90W (10800lm) 130 - 130W (15600lm)	50 - 5000K 40 - 4000K	5M - Type V Medium	SF3 - 3" Tenon Adapter	DB - Dark Bronze	UD - 120-277V 1-10V

Accessories/Option Adder

Part #	Description
SENSOR-PH-PB-U Assembled in America*	Button Photocell 110-277V Fixtures to be assembled to "Assembled in America" standard upon request.