



Renovators Supply, Inc. © www.rensup.com

Deck Mount Shower Enclosure Instructions
For Rectangular and Oval Surrounds

Install Faucet:

1. Remove the brass jamnut and brass washer from both threaded faucet pipe ends
2. Push the two threaded pipe ends of the faucet assembly through the two tub wall holes. The black gasket should sit right against the tub wall. Clamp the faucet firmly against the tub by tightening the brass washer and jamnut against the outside wall of the tub.
3. Wrap the ends of the threaded pipes with teflon tape.
4. Attach the water supply lines


Install Shower:

5. Differentiate between the WALL flange and rod from the CEILING flange and rod. Install the WALL flange and rod by sliding the wall joiner up the shower riser until it is about 12 inches below top bend of the tube.
6. Install shower riser tube onto the top threaded pipe of faucet assembly
7. With a helper, take one of the sides of the shower ring and slide into the wall connector. Be sure that the threaded hole in the connector is facing outward. Slide the other side of the shower ring into the wall connector.
8. Slide the remaining ends of the shower ring into the ceiling connectors, be sure that the threaded hole in the ceiling connector is facing upward.
9. Measure the desired length of the wall and ceiling rods, allowing for the height of the user and the length of the shower curtain. Cut the rods to length on the UNTHREADED ENDS. Allow for the threads of the rods.
10. Install the flanges on the wall and ceiling
11. Being extremely careful, screw the ceiling rod into the ceiling connector on the shower ring. DO not twist the joint. Have a helper support the other end of the shower ring while you place the ceiling rod into the ceiling flange and tighten the set screw.
12. Being extremely careful, screw the wall rod into the wall connector. Do not twist the joint. Place the wall rod into the wall flange and tighten the set screw.
13. Install shower head. Do not use a wrench. Wrap protective cloth around shower head connector. Use slip joint pliers to tighten riser. We suggest using teflon tape to help assure seal.

NOTE: Rectangular shower rings come with one ceiling rod and flange.
Oval shower rings come with two ceiling rods, two flanges and one swivel.

These instructions and drawings disclose confidential and other data of proprietary nature owned by Renovator's Supply Inc. and may not be used or disclosed to others without the prior written consent of Renovator's Supply Inc. Renovators Supply, Inc.©

RENOVATOR'S SUPPLY

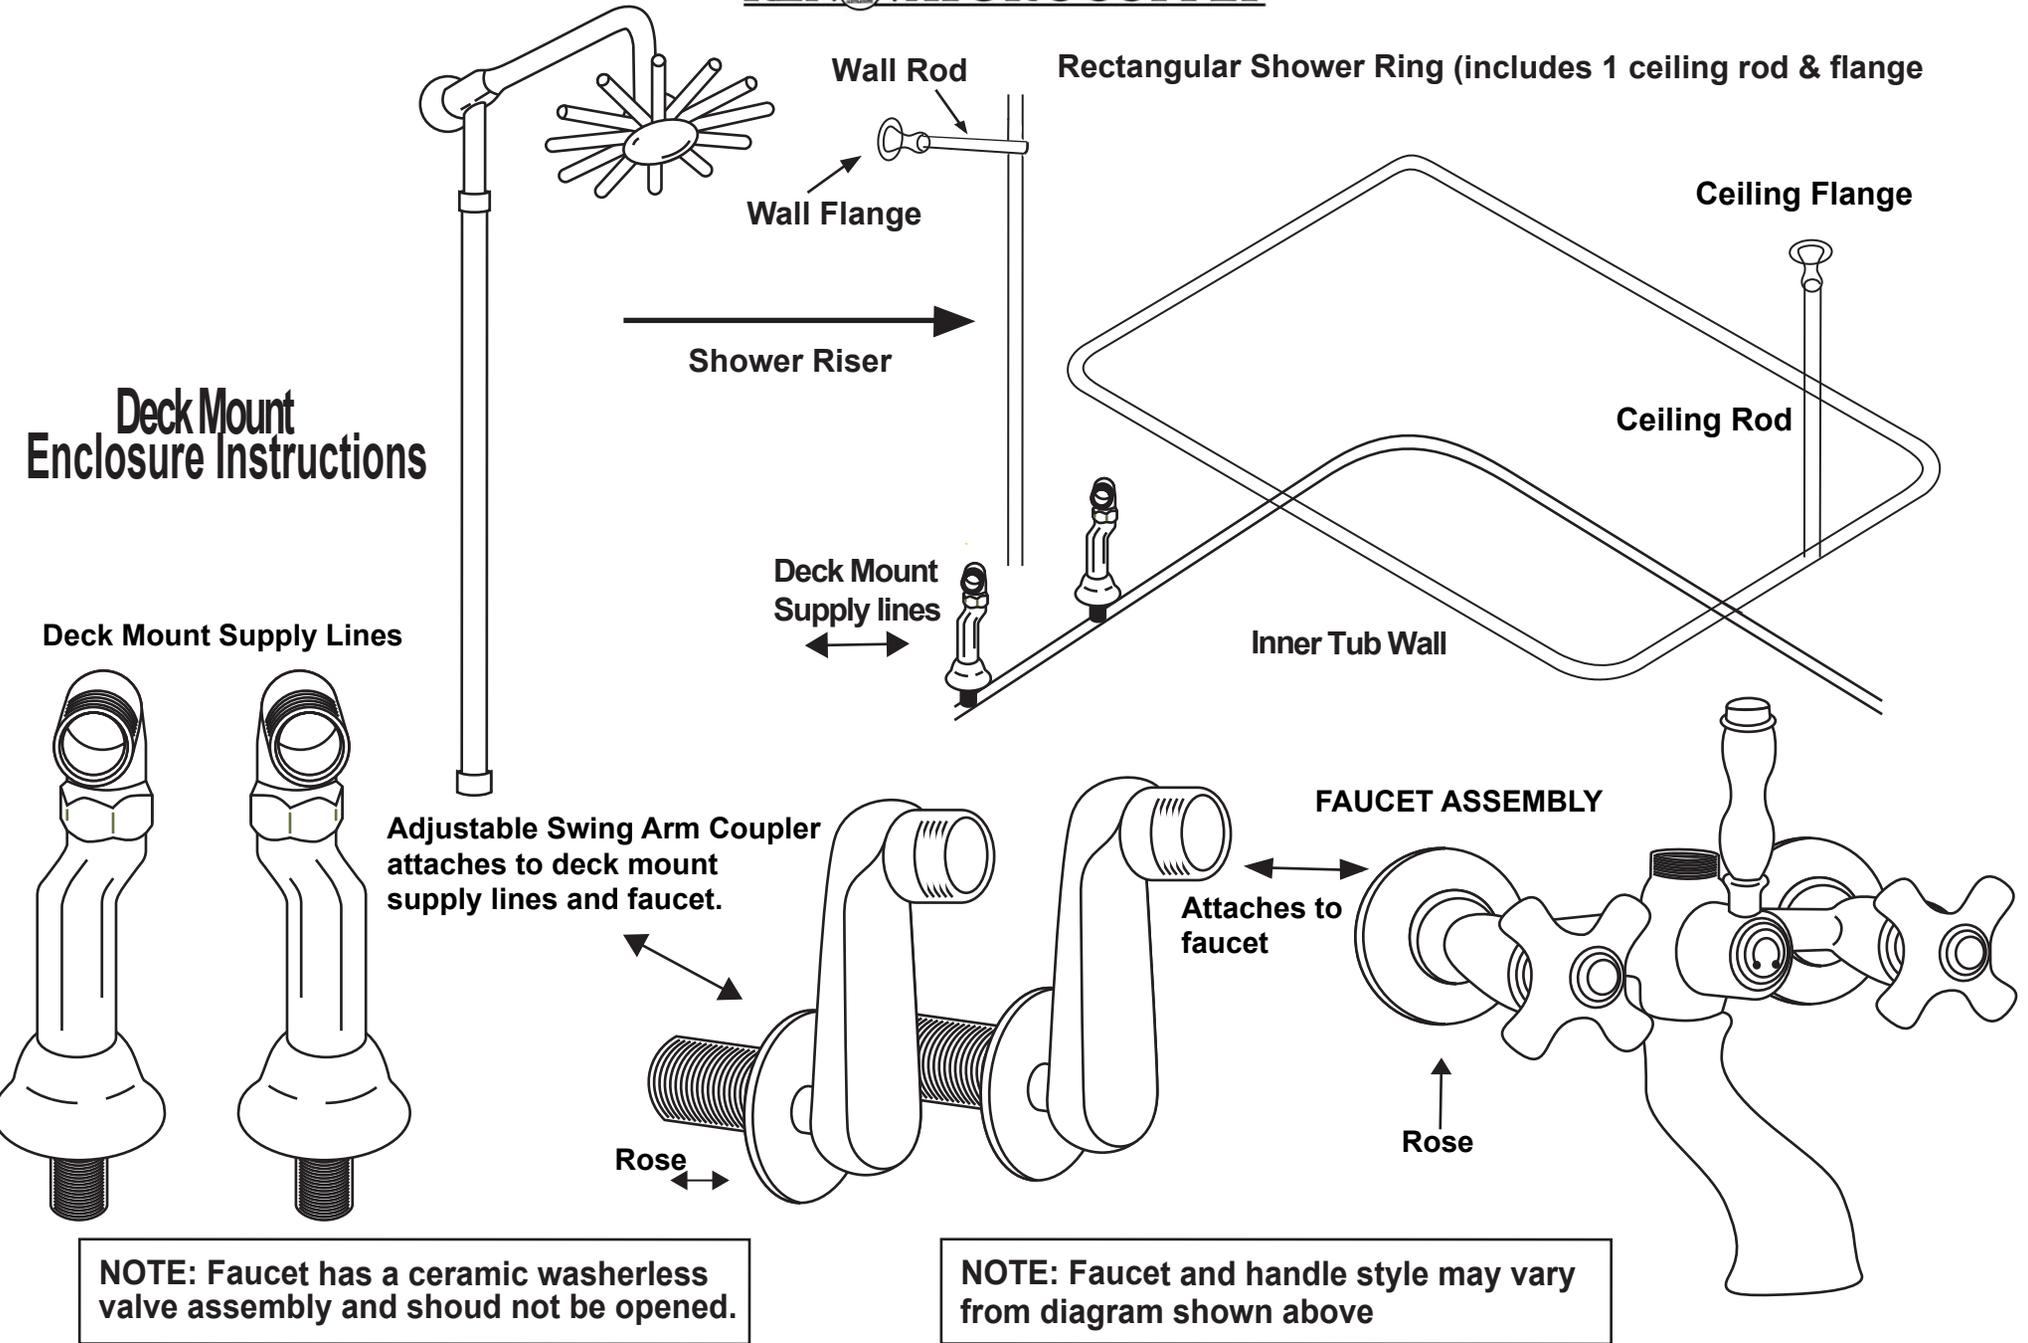

These instructions and drawings disclose confidential and other data of proprietary nature owned by Renovator's Supply, Inc. and may not be used or disclosed to others without prior written consent of Renovator's Supply, Inc.©

RENOVATOR'S SUPPLY

