


The Renovator's Supply, Inc
20492 No Slam Black Elongated Seat
www.rensup.com 1-800-659-2211
your trusted manufacturer since 1978
Made In PRC


1

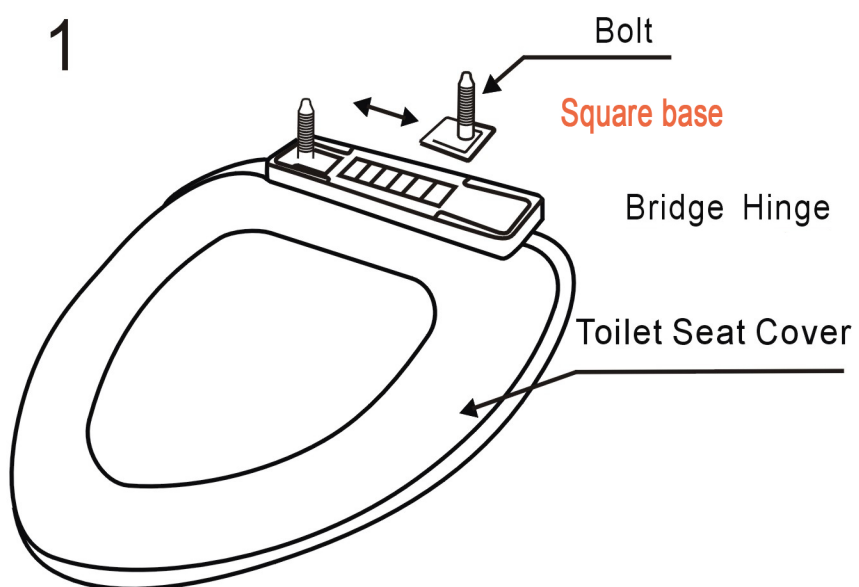

Bolt
Square base
Bridge Hinge
Toilet Seat Cover


Remove the locknut and washer from the bolt.
Insert the bolts, square base down, into the bridge hinge's center channel. Slide bolts outward from center and under the mounting lip.

2

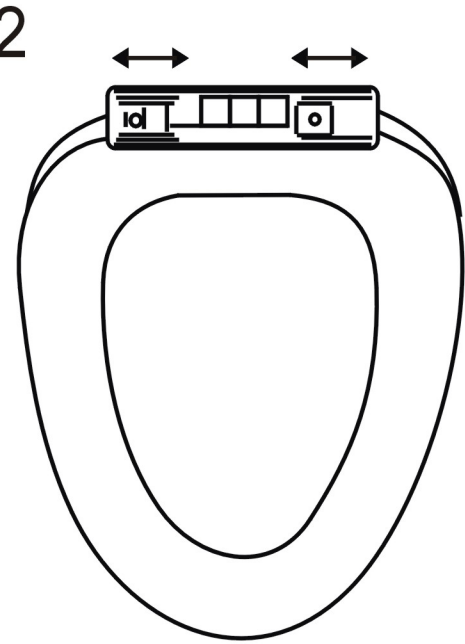


Move the **bolts to** the left and right, adjust the distance between two Bolts to make them match with the Toilet Holes.

Hint: Rotate bolts as needed to fine tune the closed placement of the seat (front edge of seat should meet front edge of toilet, or extend slightly **beyond** it.

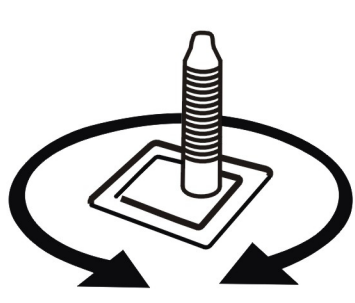

3

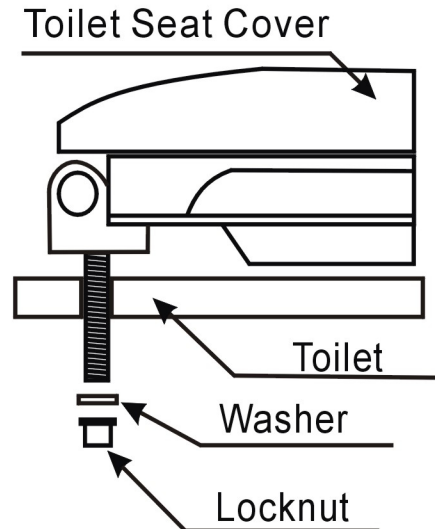

Toilet Seat Cover
Toilet
Washer
Locknut

Insert bolts into mount holes on toilet.
Secure using washer and locknut.