





The Renovator's Supply, Inc
13506 Toilet Seat EZ Close White
www.rensup.com 1-800-659-2211
your trusted manufacturer since 1978
Made In PRC

1

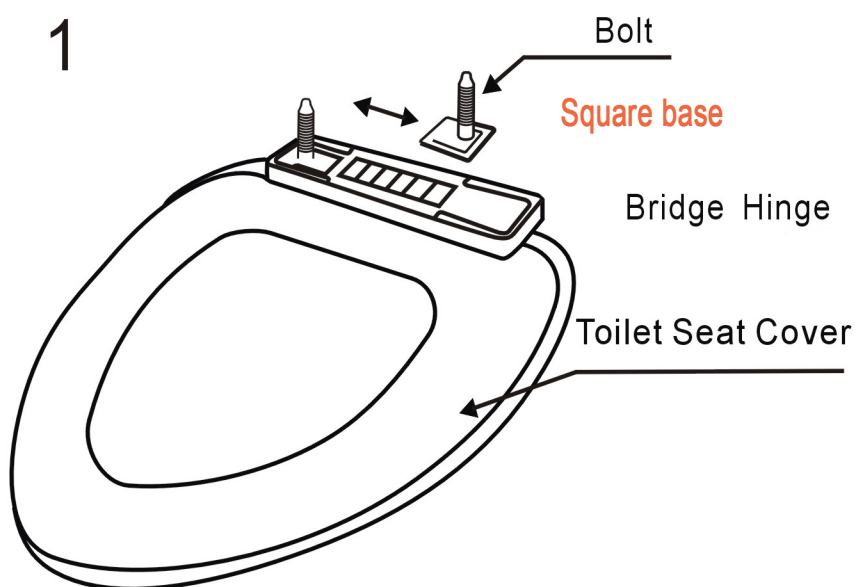


Remove the locknut and washer from the bolt.
Insert the bolts, square base down, into the bridge hinge's center channel.
Slide bolts outward from center and under the mounting lip.

2

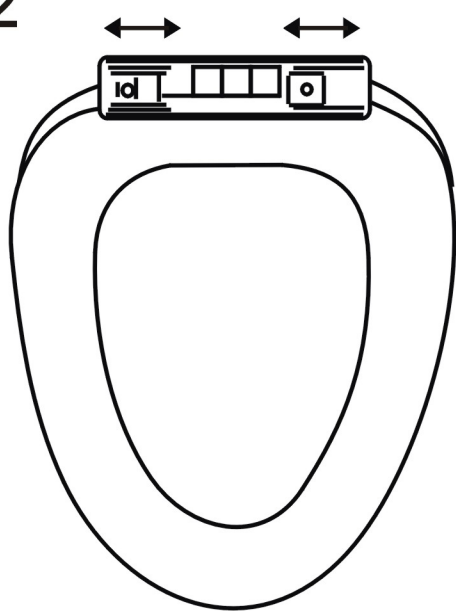


Move the **bolts to** the left and right, adjust the distance between two Bolts to make them match with the Toilet Holes.

Hint: Rotate bolts as needed to fine tune the closed placement of the seat (front edge of seat should meet front edge of toilet, or extend slightly **beyond** it.)

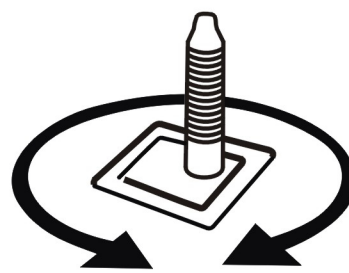

3

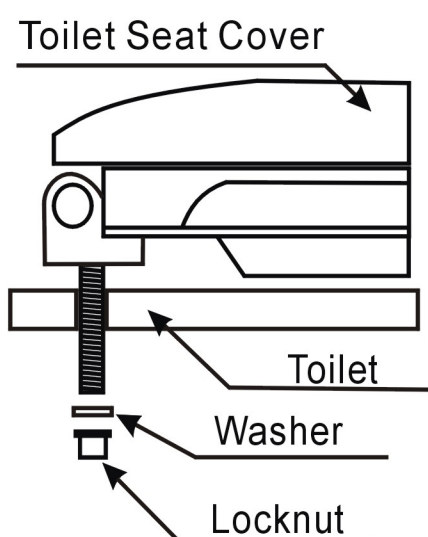

Insert bolts into mount holes on toilet.
Secure using washer and locknut.