



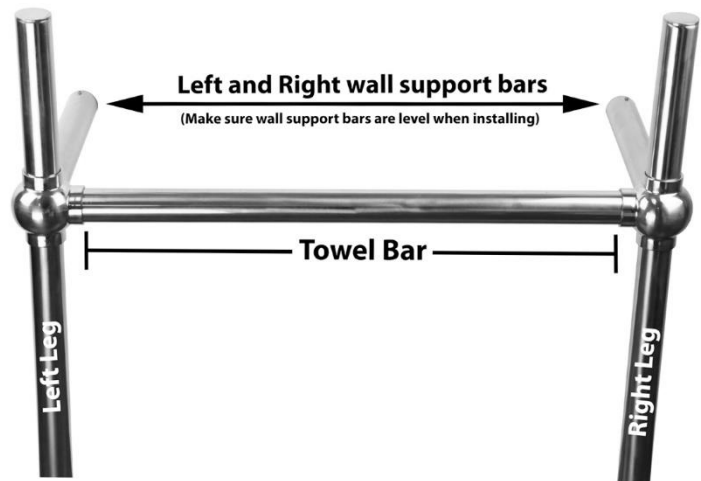

Console Sink Instructions

1. Use towel bar to connect legs and tighten with allen wrench.
2. Attach left and right wall support bars to legs and tighten with allen wrench
3. Place legs against the wall and insure that both wall support legs are level to each other.

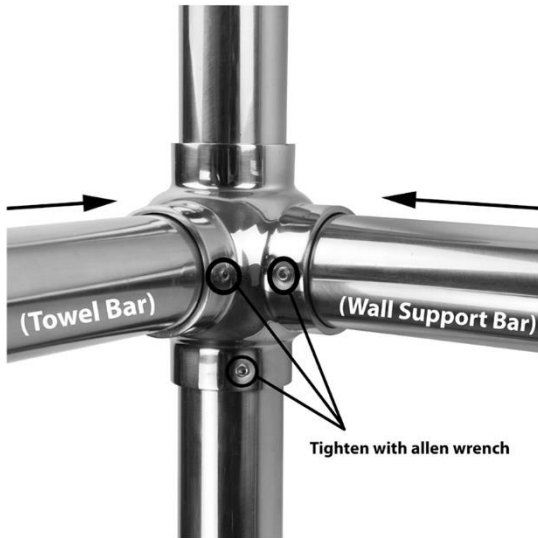

4. Trace the circumference of the end cap on both the left and right wall support legs insuring that both end caps are sitting on studs or an equilivant surface. Remove end caps.
5. Use #10 Panhead Wood Screws (not included) install end caps into the wall where you traced in step 4.
6. Slide wall support legs onto the end caps and tighten with Allen wrench. We recommend repeating steps 4,5, and 6 in order to secure the legs to the floor for added stability.

Remove end cap with Allen wrench.





7. Place sink on top of sink legs insuring that the legs sit in the cups on the underside of the sink.

8. Mark where the installation holes are.

9. Remove sink from legs and install faucet and drain.

10. Drill pilot holes where you marked the installation holes.

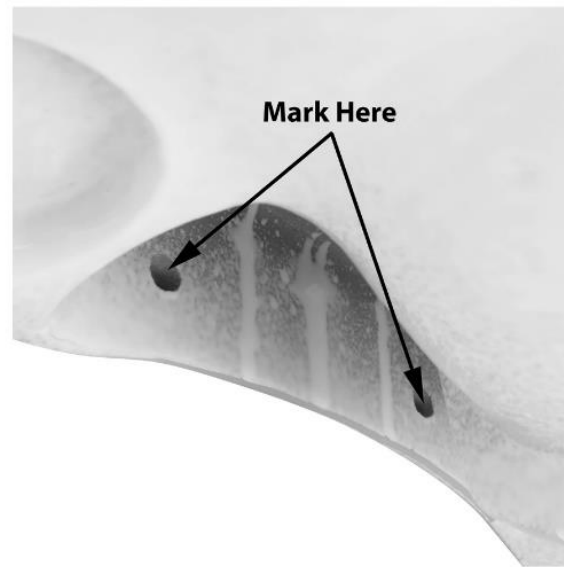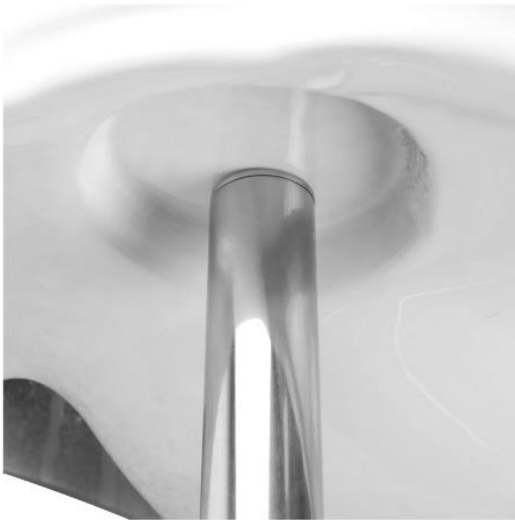

11. Place sink back on legs and insure they sit in the cups on the underside of the sink.

12. Install lags bolts into pilot holes and tighten to secure.

