


1. Remove screen from desk.
2. Align magnet with opening of magnet holder.
3. Release magnet, magnet will fall into place within magnet holder, on top of existing magnet.

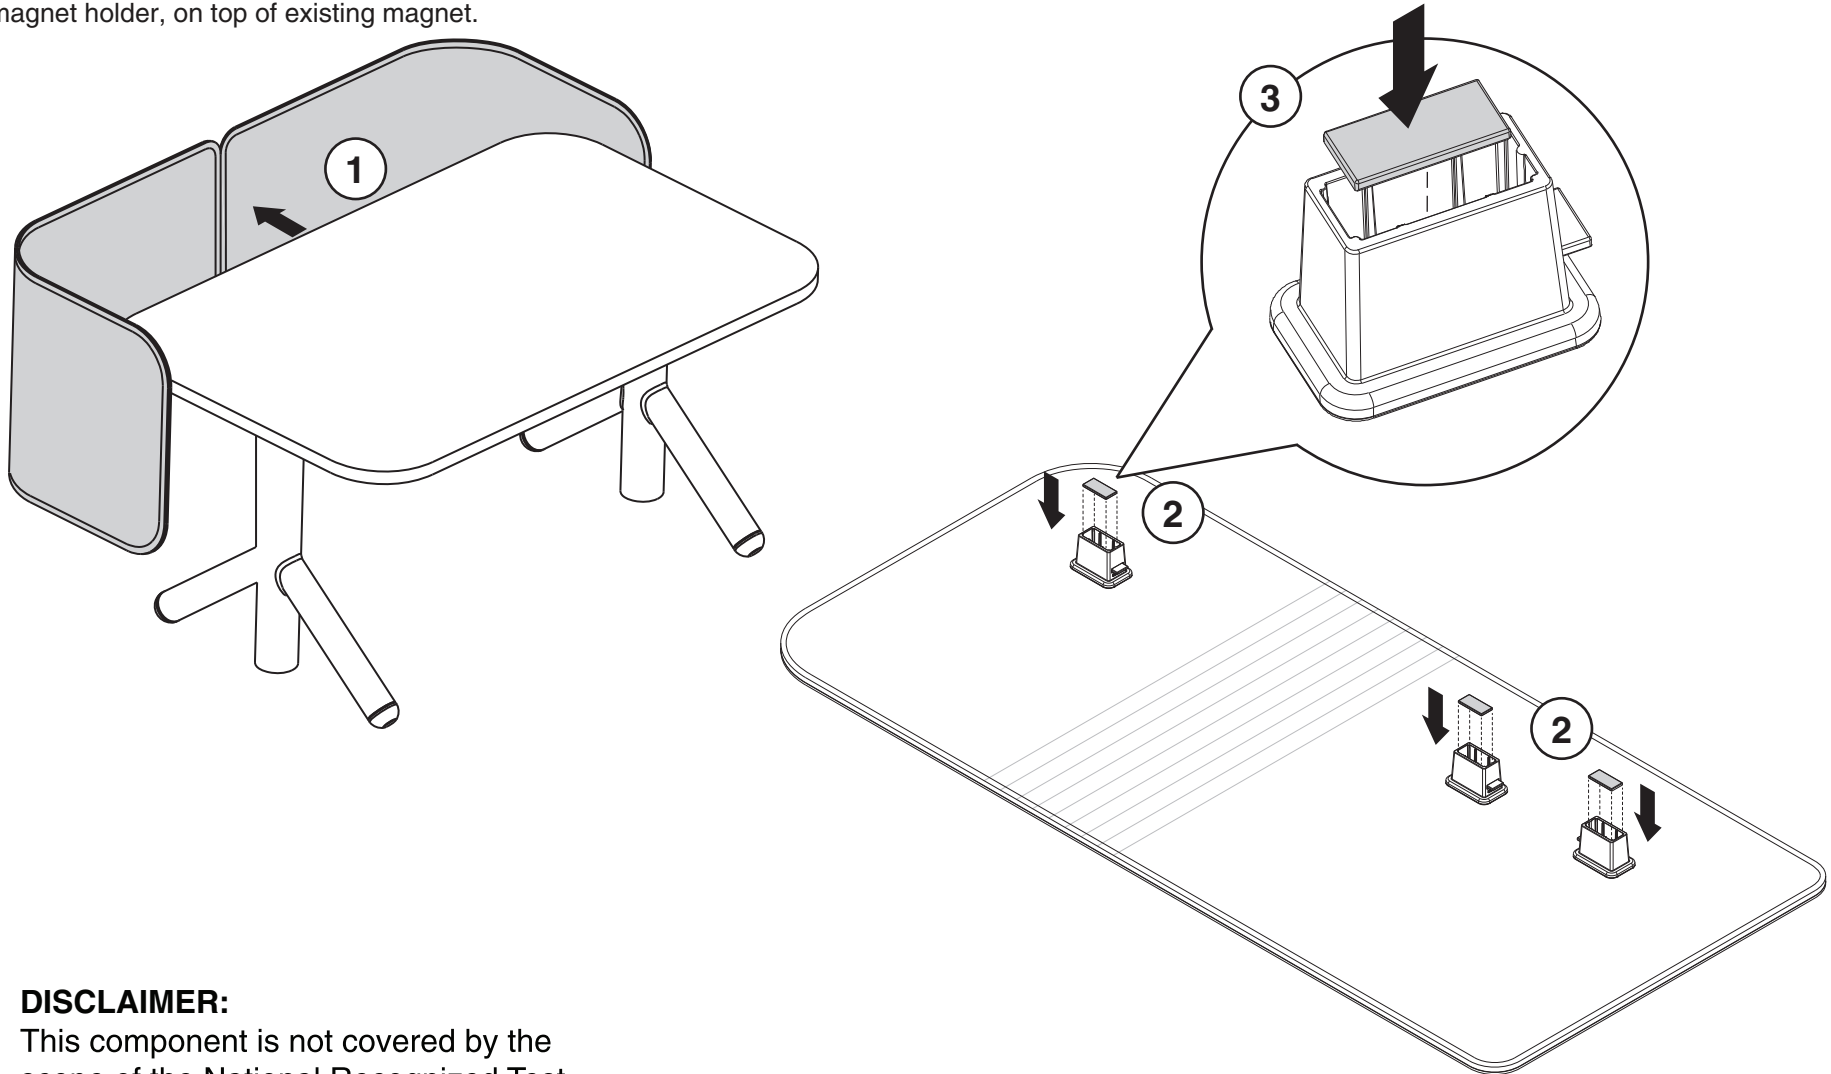

DISCLAIMER:

This component is not covered by the scope of the National Recognized Test Lab (NRTL) Listing.