



1. Route cable through VIA from bottom, up 51-1/4". Use pliers to grasp top end of cable and feed exposed cable out 8"- 9" from exit point.
2. Attach modular plug to cable output end.

CAN INSTALL FROM TOP AT CORNER CONFIGURATION ONLY

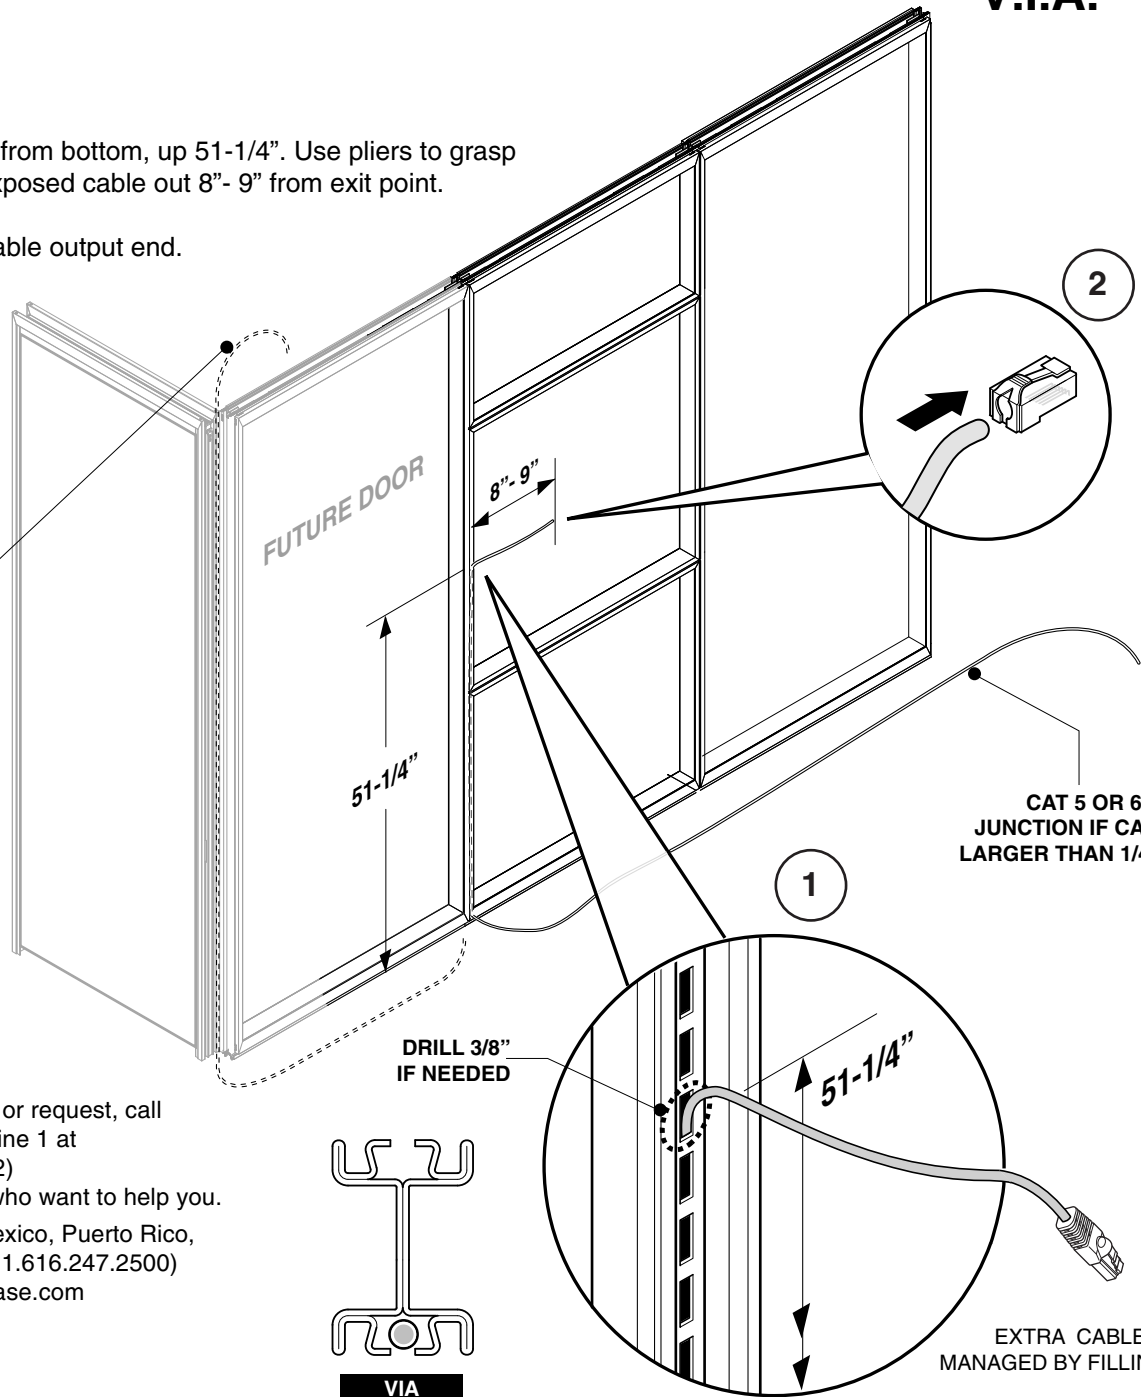

2

1

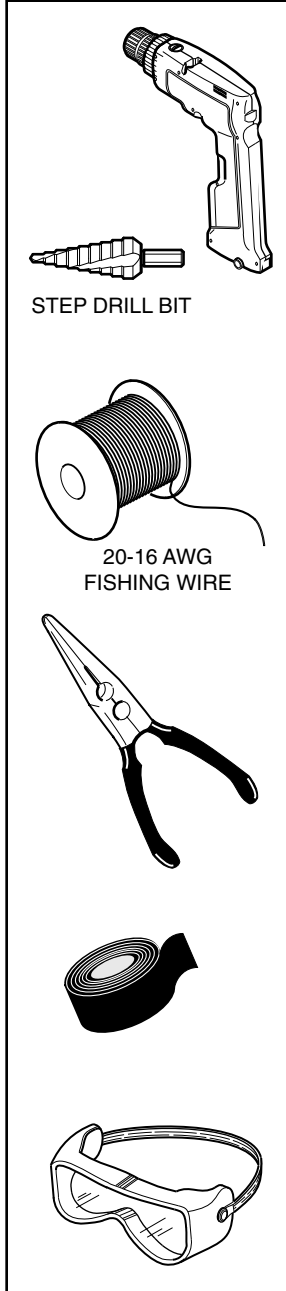


STEP DRILL BIT

20-16 AWG FISHING WIRE

CAT 5 OR 6 JUNCTION IF CABLE LARGER THAN 1/4" DIA.

EXTRA CABLE CAN BE MANAGED BY FILLING OPENINGS.



DRILL 3/8" IF NEEDED

If you have a problem, question, or request, call your local dealer, or Steelcase Line 1 at **888.STEELCASE** (888.783.3522) for immediate action by people who want to help you.

(Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call: 1.616.247.2500) Or visit our website: [www.steelcase.com](http://www.steelcase.com)

© 2014 Steelcase Inc.  
Grand Rapids, MI 49501  
U.S.A.

Printed in U.S.A.