


TS312 Shortcut™ Chair Base Replacement



1. Lay chair on its side.
 2. Hit bottom of the cylinder with a hammer (2a) while pulling forward on the chair base (2b).
 3. Remove chair base.
 4. Remove casters and install on replacement base.
- Hint:** If pintle is stuck in base, remove with pliers.
5. Place new base onto cylinder.
Turn chair over and sit in it to complete chair base installation.

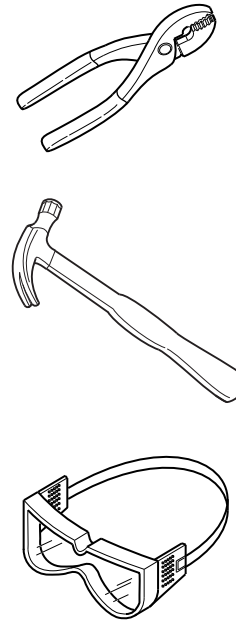