




**Standard Version**

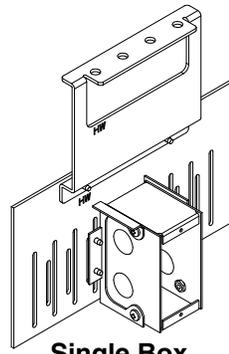


**Single Box**

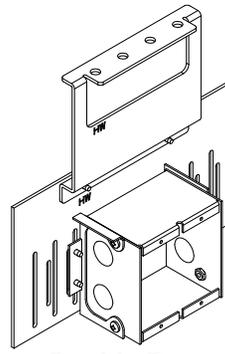


**Double Box**

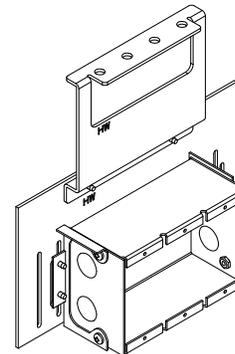



**Triple Box**

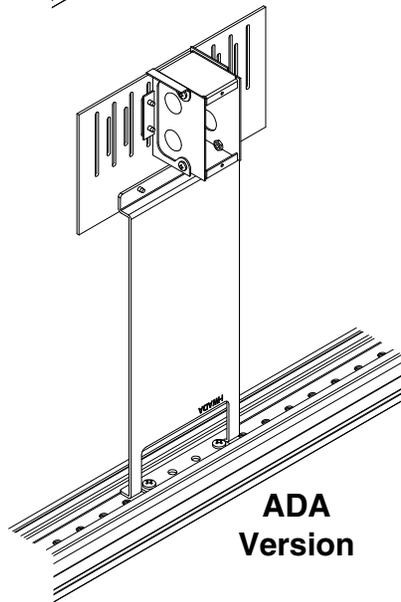

**ADA Version**

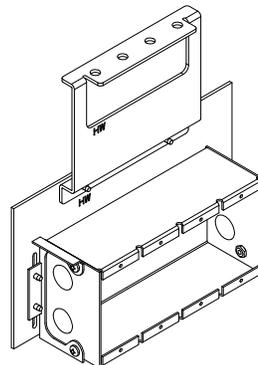

**Quad Box**

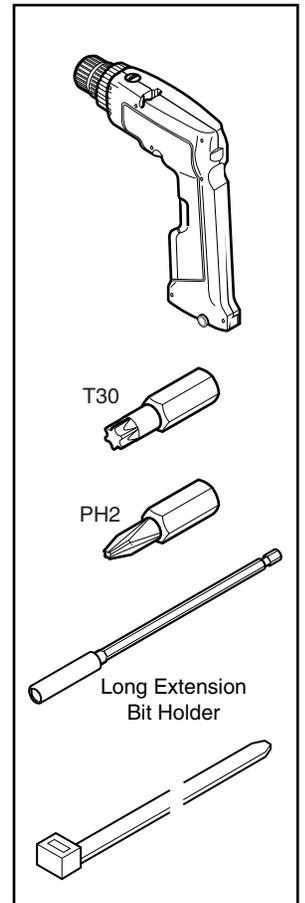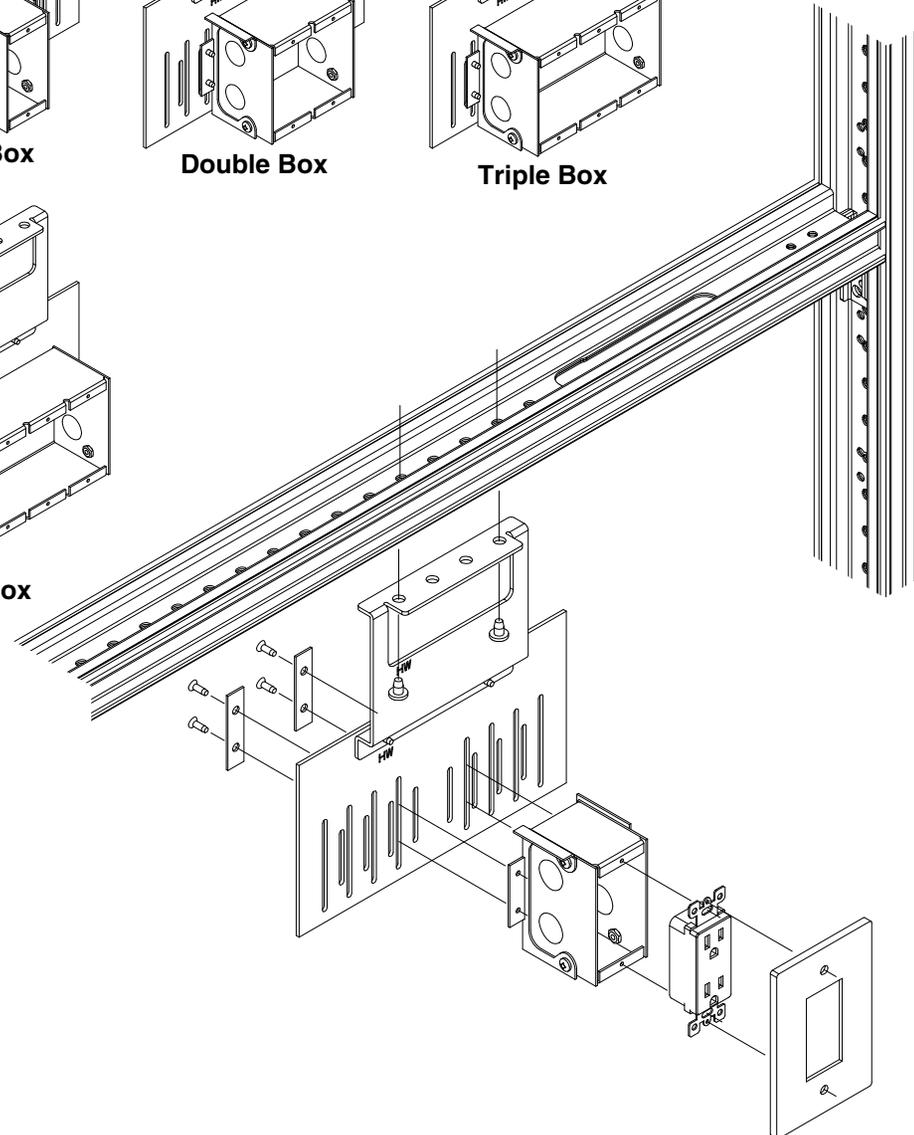

If you have a problem, question, or request, call your local dealer, or Steelcase Line 1 at **888.STEELCASE** (888.783.3522) for immediate action by people who want to help you.

(Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call: 1.616.247.2500)  
Or visit our website: [www.steelcase.com](http://www.steelcase.com)



© 2016 Steelcase Inc.  
Grand Rapids, MI 49501  
U.S.A.

Printed in U.S.A.

**1.** Mount box brackets to the appropriate junction box (single, double, triple or quad) using the screws & nuts provided.

**NOTE:** Appleton masonry boxes MI-250 shown.

**2.** Mount the junction box assembly to the bracket making sure the junction box assembly is centered on the bracket. Mount with shim plates and screws provided.

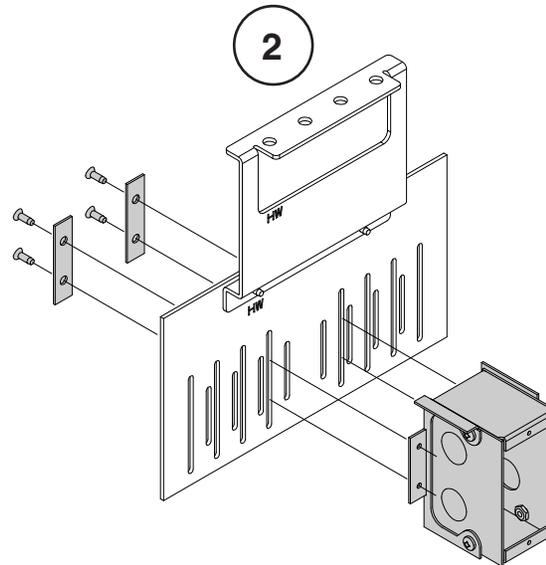
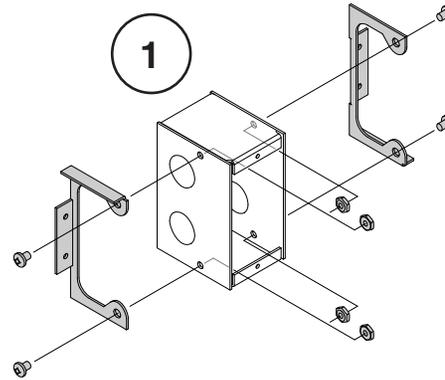


**NOTE:** Refer to RFID labels and layout drawings to determine correct locations and orientation for product.

**3a.** Measure from the centerline of the vertical on the frame to the center of the mounting bracket assembly for the horizontal measurement. Install screws using a long extension and T30 bit.

**NOTE:** Centerline may not be exact.

**3b.** Mounting bracket assembly has slots both vertically and horizontally for hole alignment when skin is installed.

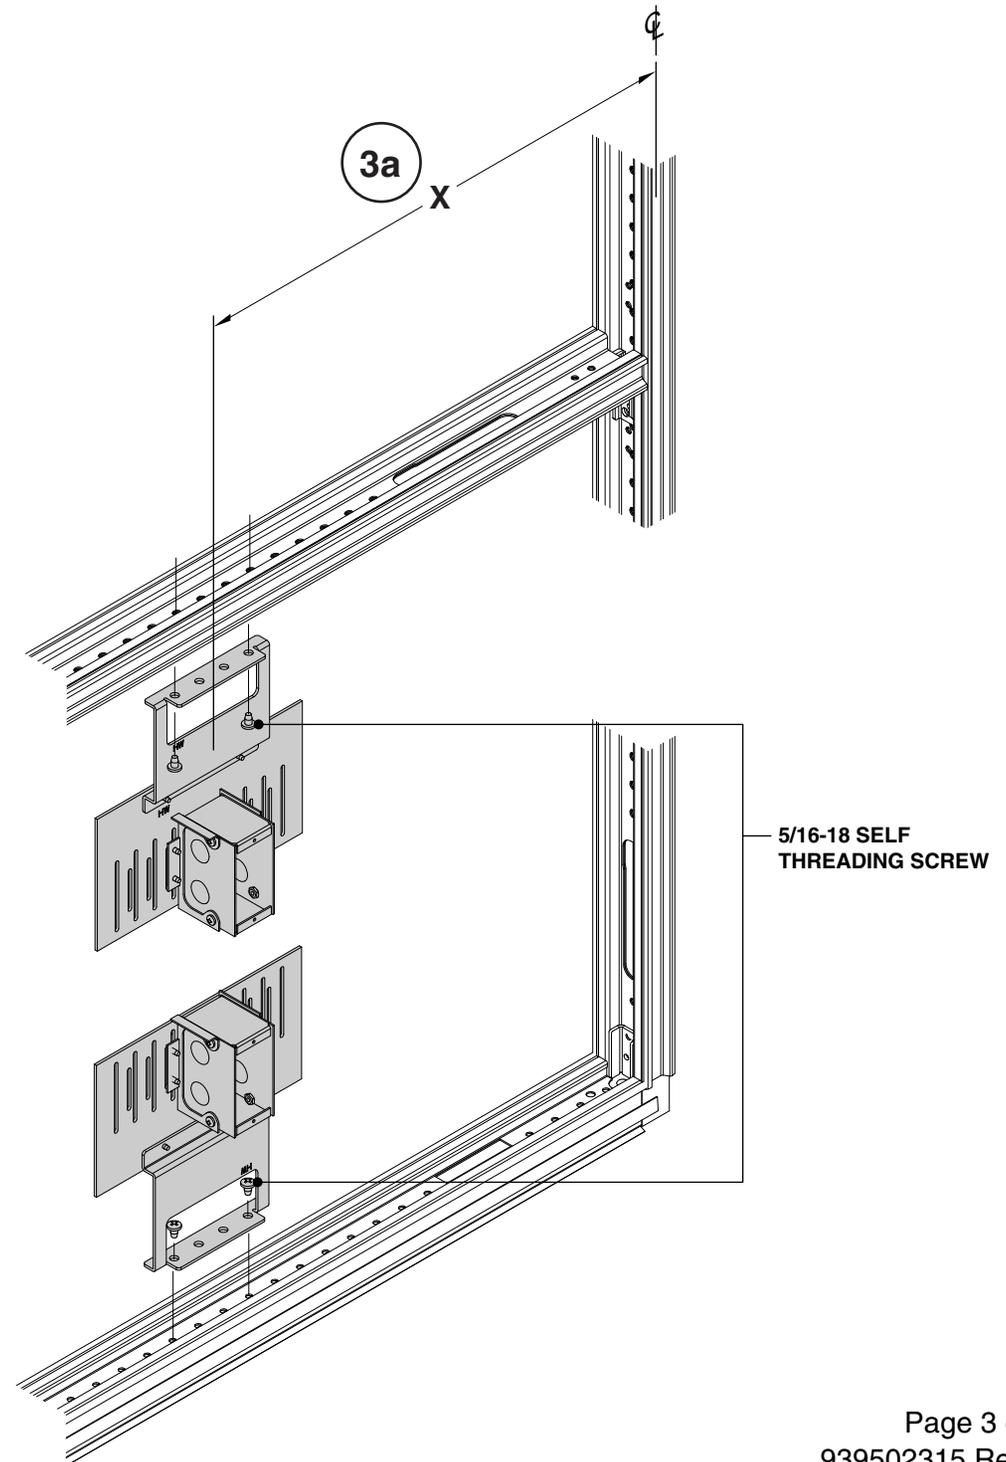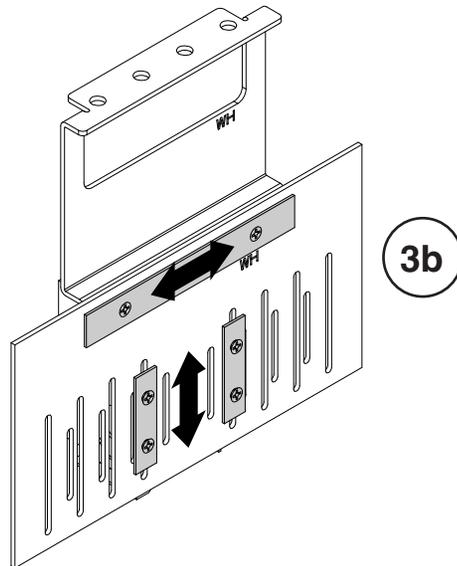

**4.** Remove the desired knockout(s) in the box and add your conduit connector and flex (or rigid) conduit (extra flex conduit is recommended). Run wire and make all electrical connections to the building source. Use cable ties as needed to ensure a prolonged stable support of conduit.



**5.** Fine tune the hardwire junction box. Place bottom of the skin in the bottom rail of the frame and push towards the junction box. Fine tune the placement within the hole on the skin by adjusting horizontally and vertically (See step 3b), then tighten screws on the mounting bracket assembly.

**6.** Install the skin. See assembly direction # 939502320 for proper and complete installation.

**7.** Install the receptacle to the box. Make sure the ears are left on the receptacle and make sure the ears overlap the skin face.

**8.** Install the trim cover to the receptacle.

**NOTE:** On back-to-back applications, you may be required to remove the first side skin to align the second side skin.

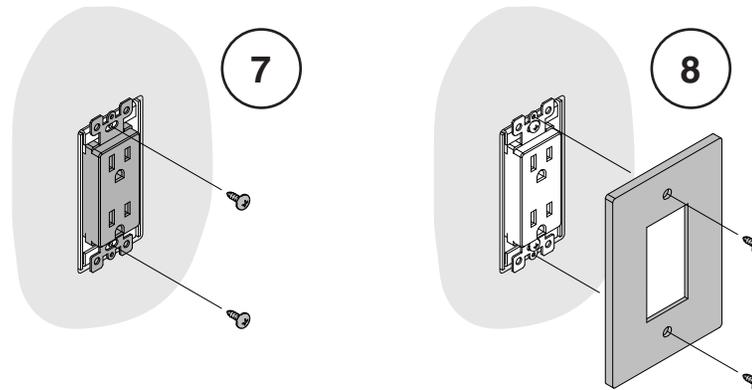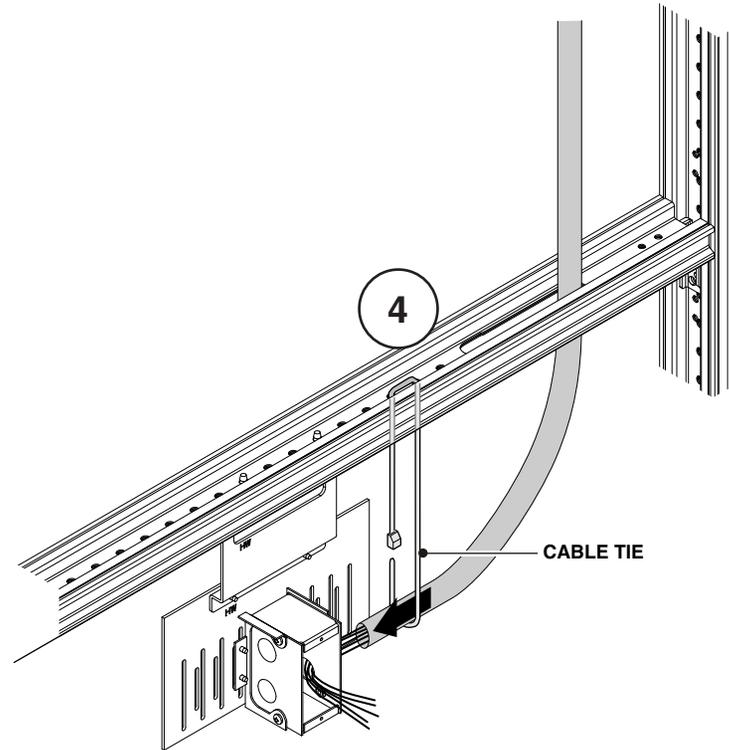

**When brackets share the intermediate rail location**

Stagger the screws when brackets align or are offset on top of each other.

