


NT 33-F / NT 34-F NT 33-M / NT 34-M




Patent Number: ZL 2019 3 0323477.7




F Type

M Type

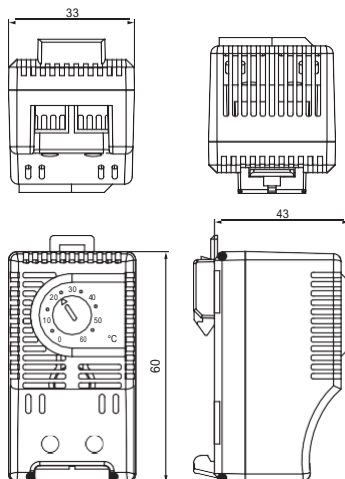

Connection diagrams

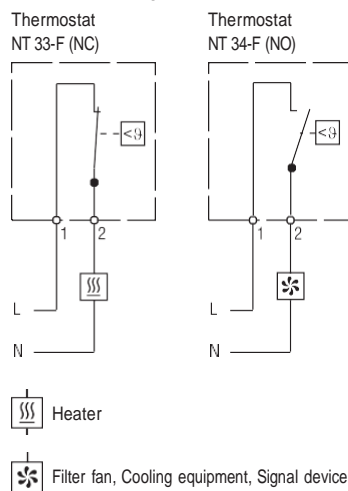

- Large setting range
- Small size
- Simple to mount
- High switching performance

NT 33-F: Thermostat (normally closed); contact breaker for regulating heaters. The contact opens when temperature is rising.

NT 34-F: Thermostat (normally open); contact maker for regulating of filter fans and heat exchangers or for switching signal devices when temperature limit has been exceeded. The contact closes when temperature is rising.

Technical Data


CE RoHS ISO9001 Patent

NT 33-F / NT 34-F / NT 33-M / NT 34-M	
Operating Voltage	All AC/DC Voltage
Switch temperature difference	+/-5°C
Sensor element	thermostatic bimetal
Contact type	snap-action contact
Service life	>100,000 cycles
Max. switching capacity	250VAC, 10 (2) A / 120VAC, 15 (2) A DC 30W at 24VDC to 72VDC
Max. inrush current	AC 16A for 10 sec.
Connection	2-pole terminal, clamping torque 0.5Nm max.: rigid wire 2.5mm ² (AWG 14) stranded wire ¹ 1.5mm ² (AWG 16)
Mounting	clip for 35mm DIN rail, EN 60715
Casing	plastic according to UL94 V-0, light grey
Dimensions	60x33x43mm
Weight	approx. 40g
Fitting position	variable
Operating/Storage temperature	-45 to +80°C (-49 to +176°F)
Operating/Storage humidity	max. 90% RH (non-condensing)
Protection type	IP20

¹ When connecting with wires, wire end ferrules must be used.

Important note: The contact system of the regulator is subjected to environmental influences, thus the contact resistance may change. This can lead to a voltage drop and/or self-heating of the contacts.

Examples of connection

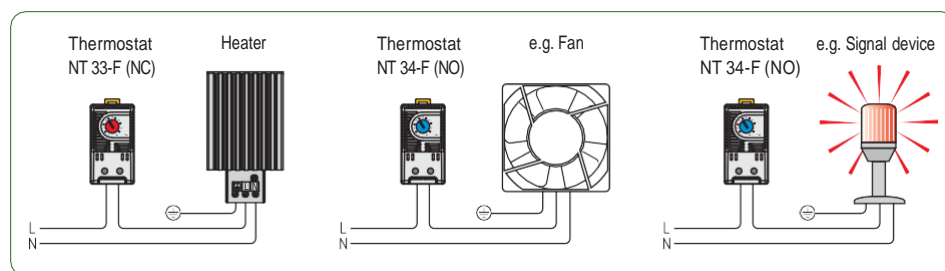

Fast Fixing Type (F Type)		Manual Up down Type (M Type)		Setting range
NT33-F (NC Type)	NT34-F (NO Type)	NT33-M (NC Type)	NT34-M (NO Type)	
860031	860036	860640	860645	0 to +60°C
860032	860037	860641	860646	-10 to +50°C
860033	860038	860642	860647	+20 to +80°C
860034	860039	860643	860648	+32 to +140°F
860035	860040	860644	860649	+14 to +122°F